

# Time-Lag Sub-Miniature Fuse

## 5mm × 20mm

**multicomp** PRO

**RoHS  
Compliant**



### Description

The time-lag fuse with high breaking capacity for use with printed circuit boards is used in a large variety of applications. This 5mm × 20mm device is constructed of a ceramic tube with electro-plated brass end caps. The product with 250V AC rating and 1500 Ampere breaking capacity, offers excellent quality and is 100% tested for cold resistance and precise length.

### Features

- Miniature fuse with time-lag, high breaking capacity
- 5mm × 20mm physical dimensions
- Ceramic tube, encapsulated design with nickel - plated brass end caps
- Optional axial leads are Ø0.8mm × 38mm
- Lead-free and Halogen-free
- Designed compliant to IEC 60127-2/V

### Specifications

Operating Temperature	: -55°C to +125°C
Storage Conditions	: +10°C to +60°C
Relative Humidity	: ≤ 75% yearly average without dew, maximum 30 days at 95%
Vibration Resistance	: 24 cycles at 15 min. each 10-60Hz at 0.75mm amplitude 60-2000Hz at 10g acceleration


### Electrical Characteristics

Part Number	Rated Current	Max. Voltage	Max. Voltage Drop (mV)	Breaking Capacity	Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec)	Max. Power Dissipation (W)
MP001616	1A	250V AC	350	10kA@125V AC 1500A@250V AC 50-60Hz Cosφ=0.7-0.8	3.42	2.5

#### Note:

(1) Permissible continuous operating current is ≤100% at ambient temperature of 23°C (73.4°F)

### Temperature Derating Curve

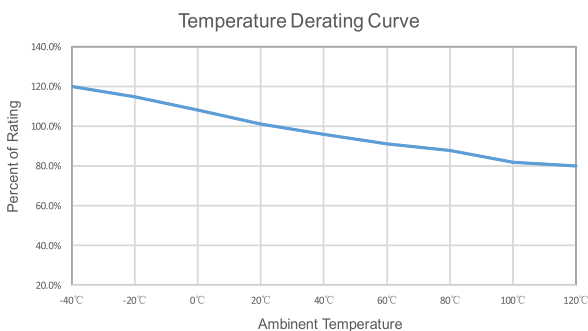

$$\text{Calculation for ideal fuse selection} = \frac{\text{Operating Current (A)}}{\text{Rating (\%} \times 0.75)}$$

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro


**multicomp** PRO

# Time-Lag Sub-Miniature Fuse

## 5mm × 20mm




### Time vs Current Characteristics Table

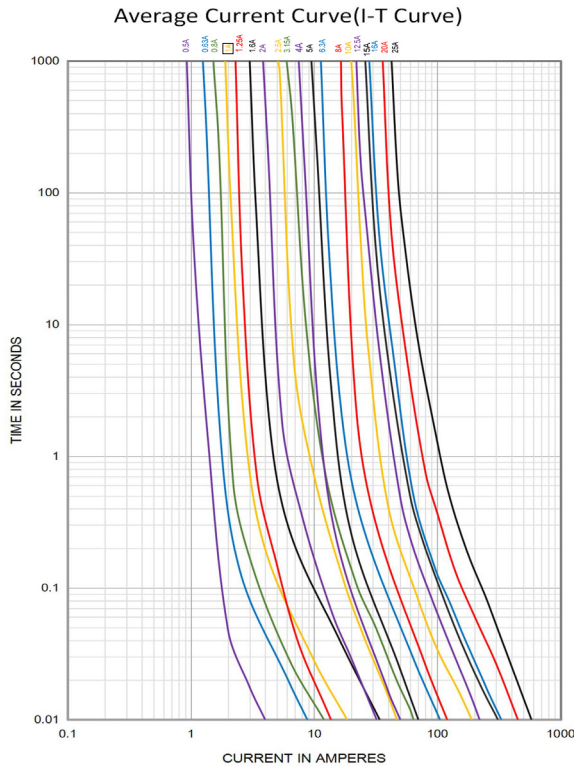

Time vs Current Characteristics: UL-248-14					
Rated Current	150%	210%	275%	400%	1000%
1A	>1H	<30min	750ms~80s	95ms~5s	10ms~150ms

### Soldering Parameters

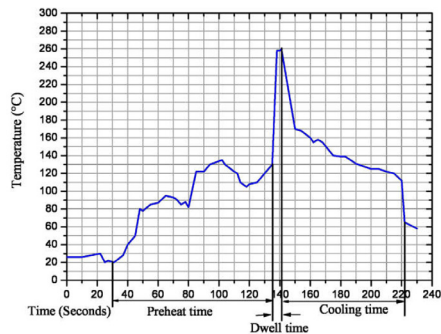



260°C = ≤5 sec (Wave Soldering)

350°C = ≤3 sec (Hand Soldering)

Soldering Peak:

260°C = 10 sec (IEC 60068-20)

### Mechanical Specifications

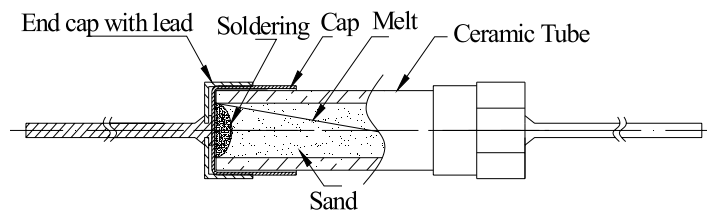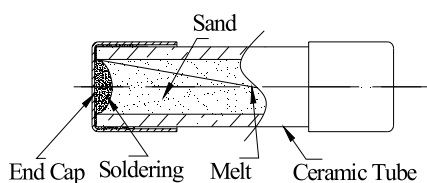

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro




# Time-Lag Sub-Miniature Fuse

## 5mm × 20mm

**multicomp** PRO

### Diagram

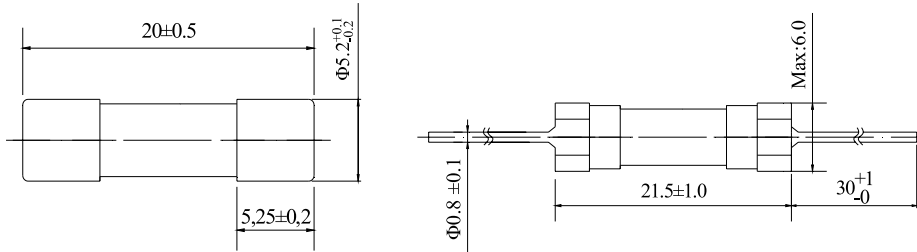

Dimensions : Millimetres

### Part Number Table

Description	Part Number
Sub-Miniature Cartridge Fuse, Time-Lag, 1A, 250V AC, 5mm × 20mm	MP001616

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp** PRO