

## Surge protection device - S-PT-EX(I)-24DC-1/2 - 2882572

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Surge protection in the IP67 screw-on module for measuring sensors in intrinsically safe circuits, direct mounting with 1/2" NPT outer thread, cable gland for the signal cable, two-stage protective circuit. HART-compatible.

### Your advantages

- ✓ Arresters in hexagonal pipe with various outer threads



### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 046356 091640 |
| GTIN                                 | 4046356091640   |
| Weight per Piece (excluding packing) | 367.920 g   |
| Custom tariff number                 | 85363010  |
| Country of origin                    | Germany   |
| Note                                 | Made to Order (non-returnable)  |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Height | 33.5 mm |
| Width  | 33.5 mm |
| Depth  | 148 mm  |

#### Ambient conditions

|   |  |
|---|--|
| Ambient temperature (operation)         | -40 °C ... 50 °C                       |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C                       |
| Altitude                                | ≤ 2000 m (amsl (above mean sea level)) |
| Degree of protection                    | IP67                                   |

#### General

## Surge protection device - S-PT-EX(I)-24DC-1/2 - 2882572

### Technical data

#### General

|   |  |
|---|--|
| Housing material                                | Zinc die-cast, surface bronzed and nickel-plated |
| Color   | silver   |
| Standards for clearances and creepage distances | IEC 60664-1                                      |
|   | EN 60079-0                                       |
|   | EN 60079-11                                      |
| Mounting type                                   | direct screw connection                          |
| Type  | Screw-in module                                  |
| Number of positions                             | 3  |
| Direction of action                             | Line-Line & Line-Earth Ground                    |

#### Protective circuit

|  |                                   |
|--|-----------------------------------|
| IEC test classification  | C1                                |
|  | C2                                |
|  | C3                                |
|  | D1                                |
| Nominal voltage $U_N$  | 24 V DC                           |
| Maximum continuous voltage $U_C$                                       | 30 V DC                           |
|  | 21 V AC                           |
| Rated current  | 350 mA (50 °C)                    |
| Operating effective current $I_C$ at $U_C$                             | $\leq 10 \mu A$                   |
| Residual current $I_{PE}$  | $\leq 2 \mu A$                    |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-line)             | 10 kA                             |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-earth)            | 10 kA (per path)                  |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (shield-earth)          | 10 kA (optional)                  |
| Pulse discharge current $I_{imp}$ (10/350) $\mu s$                     | 1 kA                              |
| Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (line-line)    | 10 kA                             |
| Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (line-earth)   | 10 kA (per path)                  |
| Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (shield-earth) | 10 kA                             |
| Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (line-line)           | 30 A                              |
| Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (line-earth)          | 100 A (per path)                  |
| Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (shield-earth)        | 100 A                             |
| Output voltage limitation at 1 kV/ $\mu s$ (line-line) spike           | $\leq 50 V$                       |
| Output voltage limitation at 1 kV/ $\mu s$ (line-earth) spike          | $\leq 1.4 kV$ (Direct grounding)  |
| Output voltage limitation at 1 kV/ $\mu s$ (shield-earth) spike        | $\leq 600 V$ (optional)           |
| Output voltage limitation at 1 kV/ $\mu s$ (line-line) static          | $\leq 50 V$                       |
| Output voltage limitation at 1 kV/ $\mu s$ (line-earth) static         | $\leq 1.4 kV$ (Direct grounding)  |
| Residual voltage at $I_n$ (line-line)                                  | $\leq 50 V$                       |
| Residual voltage with $I_{an}$ (10/1000) $\mu s$ (line-line)           | $\leq 50 V$                       |
| Voltage protection level $U_p$ (line-line)                             | $\leq 50 V$ (C1 - 0.5 kV / 250 A) |
|  | $\leq 55 V$ (C1 - 1 kV/500 A)     |

## Surge protection device - S-PT-EX(I)-24DC-1/2 - 2882572

### Technical data

#### Protective circuit

|  |                                 |
|--|---------------------------------|
|  | ≤ 55 V (C2 - 2 kV/1 kA)         |
|  | ≤ 55 V (C2 - 10 kV / 5 kA)      |
|  | ≤ 50 V (C3 - 10 A)              |
|  | ≤ 50 V (C3 - 25 A)              |
|  | ≤ 80 V (D1 - 1 kA)              |
| Voltage protection level $U_p$ (line-earth)            | ≤ 1.4 kV (C1 - 1 kV/500 A)      |
|  | ≤ 1.4 kV (C2 - 2 kV/1 kA)       |
|  | ≤ 1.4 kV (C2 - 10 kV / 5 kA)    |
|  | ≤ 1.4 kV (C3 - 25 A)            |
|  | ≤ 1.4 kV (C3 - 100 A)           |
|  | ≤ 1.4 kV (D1 - 1 kA)            |
| Voltage protection level $U_p$ (shield-earth)          | ≤ 600 V (C1 - 0.5 kV / 250 A)   |
|  | ≤ 650 V (C1 - 1 kV/500 A)       |
|  | ≤ 650 V (C2 - 2 kV/1 kA)        |
|  | ≤ 650 V (C2 - 10 kV / 5 kA)     |
|  | ≤ 650 V (C3 - 10 A)             |
|  | ≤ 750 V (C3 - 25 A)             |
|  | ≤ 750 V (C3 - 100 A)            |
|  | ≤ 650 V (D1 - 1 kA)             |
| Response time $t_A$ (line-line)                        | ≤ 1 ns                          |
| Response time $t_A$ (line-earth)                       | ≤ 100 ns                        |
| Response time $t_A$ (shield-earth)                     | ≤ 100 ns                        |
| Input attenuation aE, sym.                             | typ. 0.5 dB (≤ 1 MHz / 50 Ω)    |
|  | typ. 0.2 dB (≤ 400 kHz / 150 Ω) |
| Cut-off frequency $f_g$ (3 dB), sym. in 50 Ohm system  | typ. 6 MHz                      |
| Cut-off frequency $f_g$ (3 dB), sym. in 150 Ohm system | typ. 2.5 MHz                    |
| Resistance per path                                    | 2.2 Ω ±10 %                     |
| Surge protection fault message                         | none                            |
| Impulse durability (line-line)                         | C1 - 1 kV / 500 A               |
|  | C2 - 10 kV / 5 kA               |
|  | C3 - 25 A                       |
|  | D1 - 1 kA                       |
| Impulse durability (line-earth)                        | C1 - 1 kV / 500 A               |
|  | C2 - 10 kV / 5 kA               |
|  | C3 - 100 A                      |
|  | D1 - 1 kA                       |
| Impulse durability (shield-earth)                      | C1 - 1 kV/500 A                 |
|  | C2 - 10 kV/5 kA                 |
|  | C3 - 100 A                      |
|  | D1 - 1 kA                       |

# Surge protection device - S-PT-EX(I)-24DC-1/2 - 2882572

## Technical data

### Protective circuit

|  |            |
|--|------------|
| Alternating current carrying capacity (line-earth)   | 10 A - 1 s |
| Alternating current carrying capacity (shield-earth) | 10 A - 1 s |

### Connection data

|                                  |  |
|----------------------------------|--|
| Connection method                | Screw connection                             |
| Connection method IN             | Screw terminal blocks                        |
| Connection method OUT            | Connection line                              |
| Connection technology            | Screw connection                             |
| Screw thread                     | M3   |
| Tightening torque                | 0.6 Nm                                       |
| Stripping length                 | 6 mm   |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section solid    | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 26 ... 16                                    |

### Standards and Regulations

|                          |                     |
|--------------------------|---------------------|
| Standards/specifications | EN 61643-21 A2:2013 |
|                          | EN 60079-0 2012     |
|                          | EN 60079-11 2012    |
|                          | EN 60079-26 2007    |
|                          | IEC 60079-0 2011    |
|                          | IEC 60079-11 2011   |
|                          | IEC 60079-26 2006   |

### General

|                                 |                            |
|---------------------------------|----------------------------|
| Maximum inner capacitance $C_i$ | 2 nF                       |
| Max. internal inductance $L_i$  | 1 $\mu$ H                  |
| Max. input current $I_i$        | 350 mA (T4 / $\leq$ 50 °C) |
|                                 | 350 mA (T5 / $\leq$ 50 °C) |
|                                 | 350 mA (T6 / $\leq$ 50 °C) |
| Max. input voltage $U_i$        | 30 V                       |
| max. input power $P_i$          | 3 W                        |
| Insulation voltage to ground    | 500 V AC                   |
| Ambient temperature (operation) | -40 °C ... 50 °C           |

### Conformity / approvals

|       |                              |
|-------|------------------------------|
| ATEX  | # II 1G Ex ia IIC T4...T6 Ga |
| IECEX | Ex ia IIC T4...T6 Ga         |

### Environmental Product Compliance

|            |  |
|------------|--|
|            | Lead 7439-92-1                           |
| China RoHS | Environmentally Friendly Use Period = 50 |

# Surge protection device - S-PT-EX(I)-24DC-1/2 - 2882572


## Technical data

### Environmental Product Compliance


|  |   |
|--|---|
|  | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|--|---|

## Drawings

Dimensional drawing

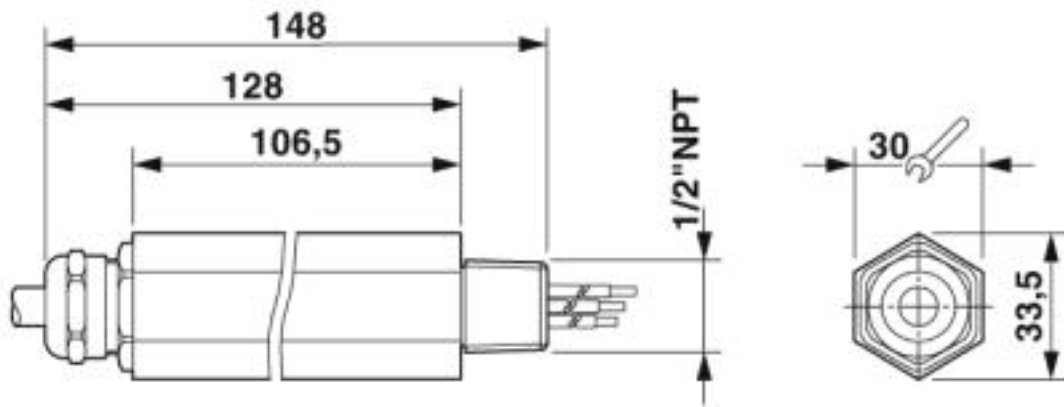


Pictogram

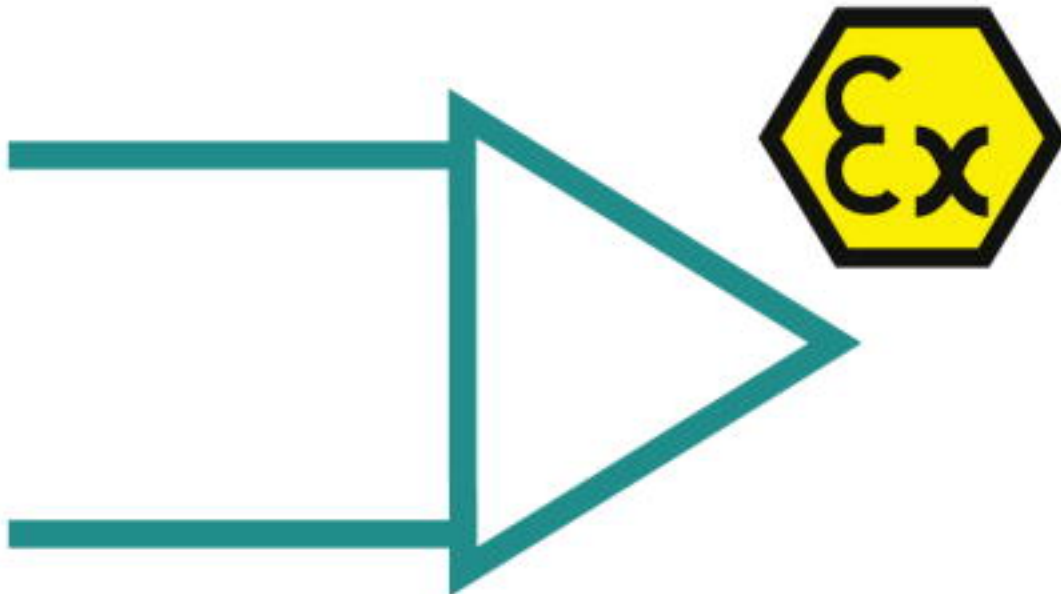

# Surge protection device - S-PT-EX(I)-24DC-1/2 - 2882572

Circuit diagram

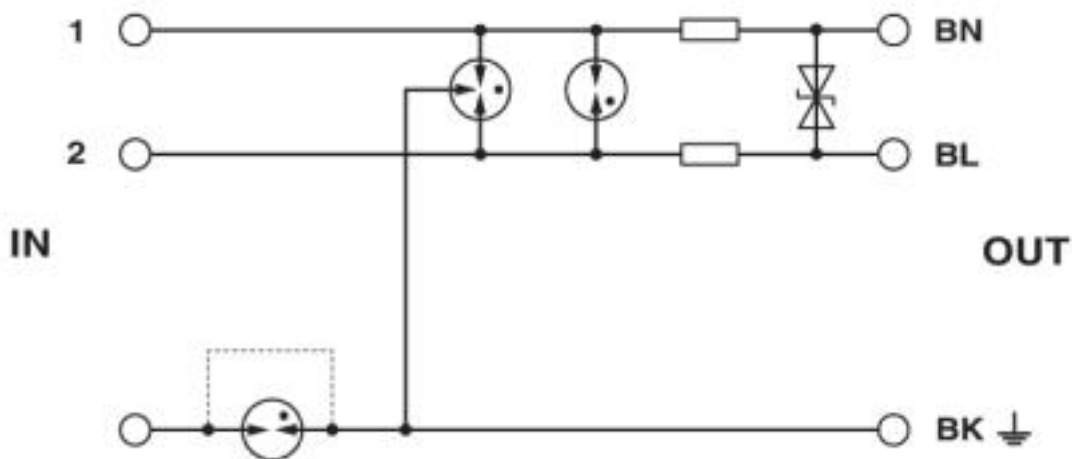

## Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27130800 |
| eCl@ss 4.1 | 27130800 |
| eCl@ss 5.0 | 27130800 |
| eCl@ss 5.1 | 27130800 |
| eCl@ss 6.0 | 27130800 |
| eCl@ss 7.0 | 27130807 |
| eCl@ss 8.0 | 27130807 |
| eCl@ss 9.0 | 27130807 |

ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000943 |
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |
| ETIM 6.0 | EC000943 |
| ETIM 7.0 | EC000943 |

UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11     | 39121610 |
| UNSPSC 12.01  | 39121610 |
| UNSPSC 13.2   | 39121620 |
| UNSPSC 18.0   | 39121620 |
| UNSPSC 19.0   | 39121620 |
| UNSPSC 20.0   | 39121620 |

# Surge protection device - S-PT-EX(I)-24DC-1/2 - 2882572

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121620 |
|-------------|----------|

## Approvals

### Approvals

---

### Approvals

EAC / EAC

---


### Ex Approvals

IECEX / ATEX / EAC Ex

---

## Approval details

|     |   |               |
|-----|---|---------------|
| EAC |  | EAC-Zulassung |
|-----|---|---------------|

|     |   |                         |
|-----|---|-------------------------|
| EAC |  | RU C-<br>DE.A*30.B01561 |
|-----|---|-------------------------|

---