

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

DIN rail housing, Upper part, Without connection opening, with vents, width: 52.6 mm, height: 74.65 mm, Depth: 36.95 mm, color: light gray (7035)

Your advantages

- ☑ DIN rail or wall mounting for application-specific device attachment
- Easy design-in, thanks to variable housing form factor
- Complete flexibility, thanks to PCBs with horizontal, frontal, and orthogonal orientation to the front of the device
- ☑ Three cover versions for individual PCB connections
- Integration of a wide variety of PCB connection technologies for a functional device design



Key Commercial Data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	4 046356 912105
GTIN	4046356912105
Weight per Piece (excluding packing)	25.140 g
Custom tariff number	85472000
Country of origin	India

Technical data

Item properties

Brief article description	Upper part of housing
Туре	EH 52,5 F-C CS/ABS GY7035
Order No.	2201835
Housing type	DIN rail housing
Housing series	EH
Туре	Upper part
Max. IP code to attain	IP20



Technical data


Item properties

- F -F	
Mounting type	Snap in
Ventilation openings present	yes
Dimensions	
Width [w]	52.6 mm
Height [h]	74.65 mm
Depth [d]	36.95 mm
Material data	
Color (RAL)	light gray (7035)
Flammability rating according to UL 94	НВ
Housing material	ABS
Ambient conditions	
Ambient temperature (storage/transport)	-40 °C 55 °C
Ambient temperature (assembly)	-5 °C 80 °C
Ambient temperature (operation)	-40 °C 80 °C (depending on power dissipation)
PCB data	
Mounting position	Vertical (horizontal DIN rail)
Type of PCB mount	Latching
General information	
Type of note	Assembly instruction:
Note	Refer to the data sheet for the range in the download area.
Packaging information	
Pieces per package	10
Denomination packing units	Pcs.
Standards and regulations	
Flammability rating according to UL 94	НВ
Environmental Product Compliance	
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings



Dimensional drawing

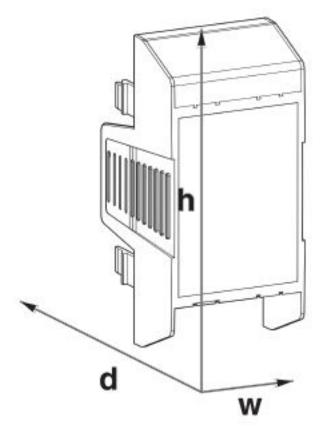

Classifications

eCl@ss

eCl@ss 5.0	27180500
eCl@ss 5.1	27180500
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 4.0	EC001031
ETIM 5.0	EC001031



Classifications

ETIM

ETIM 6.0	EC001031
ETIM 7.0	EC001031

UNSPSC

UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com