muRata Inductor Data Sheet

LQM2HPN2R2MCH# "#" indicates a package specification code.



< List of part numbers with package codes >

LQM2HPN2R2MCHL , LQM2HPN2R2MCHK , LQM2HPN2R2MCHB



Notoo
notes

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range.

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.



Packaging code	Specifications	Minimum quantity
L	φ180mm Embossed taping	3000
К	φ330mm Embossed taping	10000
В	Packing in bulk	1000

Mass (Typ.)		
1 piece		0.014g

## Specifications

Inductance	2.2µH ±20%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	0.43A(Max.) / 0.5A(Typ.)
Rated current (Itemp) (Based on Temperature rise)	0.85A(Max.) / 1.05A(Typ.)
Max. of DC resistance	0.44Ω
Avg. of DC resistance	0.355Ω (typ.)
Self resonance frequency (min.)	30MHz
Operating temperature range	-40°C to 85°C
Class of magnetic shield	Ferrite Core
Series	LQM2HPN_CH

1 of 2

## 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued


without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




## Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

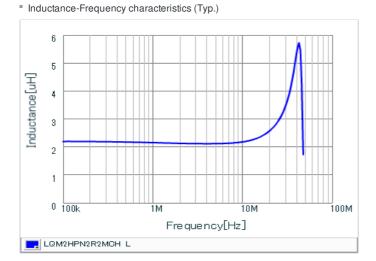

2.5 2 1.5 1.5 0.5 0 0 500 Current[mA]

Inductance-Current characteristics (Typ.)

Temperature rise characteristics (Typ.)

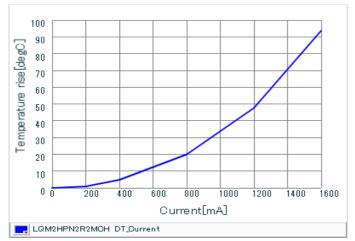

## 🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2 of 2