muRata Inductor Data Sheet

LQM2MPN1R5MEH# "#" indicates a package specification code.



< List of part numbers with package codes > LQM2MPN1R5MEHL , LQM2MPN1R5MEHB





Notes

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range.

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.



Packaging code	Specifications	Minimum quantity
L	φ180mm Embossed taping	3000
В	Packing in bulk	1000

	Mass (Typ.)	
1 piece		0.010g

Specifications

1.5μH ±20%
1MHz
0.75A(Max) / 0.9A(Typ.)
1.6A(Max) / 2.1A(Typ.)
0.113Ω
0.09Ω (typ.)
40MHz
-40°C to 85°C
Ferrite Core

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




1 of 2


Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Inductance-Frequency characteristics (Typ.)

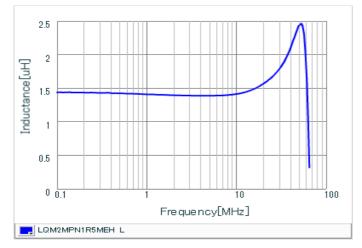

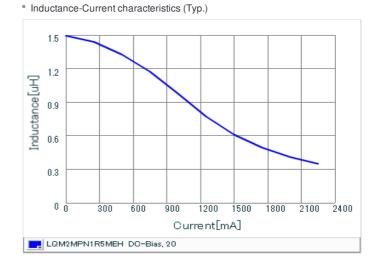

Temperature rise characteristics (Typ.)

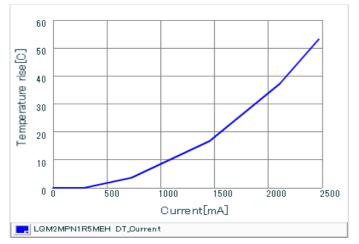

2 of 2

🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.