
muRata Inductor Data Sheet



Info- 🚓 tainment AEC-Q200 Wound (Ferrite) Bias 125 RoHS REACH In Production

< List of part numbers with package codes > LQH32PZ220MNCL , LQH32PZ220MNCK



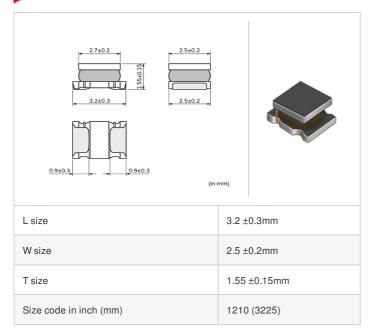

Notes

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value.

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.



Packaging code	Specifications	Minimum quantity
L	φ180mm Embossed taping	2000
к	φ330mm Embossed taping	7500

	Mass (Typ.)
1 piece	0.044g

Specifications

Inductance	22µH ±20%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	650mA
Rated current (Itemp) (Based on Temperature rise)	550mA(Ambient temp.85°C) 270mA(Ambient temp.105°C)
Max. of DC resistance	0.822Ω
Avg. of DC resistance	$0.685\Omega\pm20\%$
Self resonance frequency (min.)	20MHz
Operating temperature range (Self-temperature rise is included)	-40 °C to 125 °C
Operating temperature range (Self-temperature rise is not included)	-40°C to 105°C
Class of magnetic shield	Magnetic Resin
Series	LQH32PZ_NC
	1 of 2

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued


without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

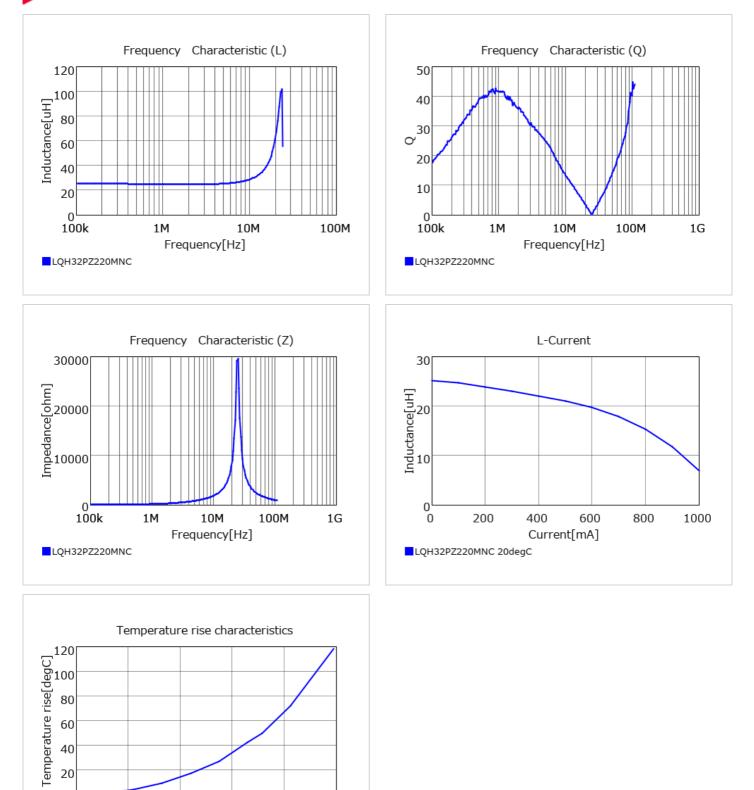

200 400 600 800 1000 Current[mA] LQH32PZ220MNC

2 of 2

🔔 Attention

0

0

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.