muRata Inductor Data Sheet


LQP03TG24NJ02# "#" indicates a package specification code.



< List of part numbers with package codes >

LQP03TG24NJ02D , LQP03TG24NJ02J , LQP03TG24NJ02B





0.3 ±0.03mm

0201 (0603)

References

Packaging code	Specifications	Minimum quantity
D	φ180mm Paper taping	15000
J	φ330mm Paper taping	50000
В	Packing in bulk	500

	Mass (Typ.)	
1 piece		0.0002g

Specifications

Size code in inch (mm)

T size

Inductance	24nH ±5%
Inductance test frequency	500MHz
Rated current (Itemp) (Based on Temperature rise)	120mA
Max. of DC resistance	3.17Ω
Q (min.)	7
Q test frequency	500MHz
Self resonance frequency (min.)	2000MHz
Operating temperature range (Self-temperature rise is not included)	-55°C to 125°C
Series	LQP03TG_02

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Q-Frequency characteristics (Typ.)

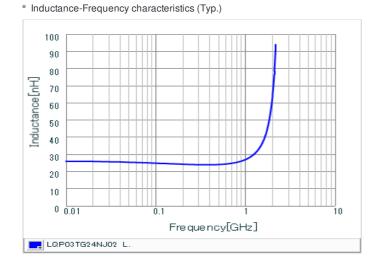

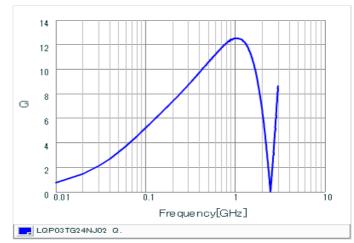

🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2 of 2