

## Specifications

Inductance	91nH ±5%
Inductance test frequency	150MHz
Rated current (Itemp) (Based on Temperature rise)	1300mA
Max. of DC resistance	0.21Ω
Q (min.)	70
Q test frequency	500MHz
Self resonance frequency (min.)	1140MHz
Operating temperature range (Self-temperature rise is included)	-55 to 125°C
Series	LQW2BAN_00

#### 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

1 of 3



In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Derating of Rated Current




### 🔔 Attention


This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

muRata Murata Manufacturing Co., Ltd.

# Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Q-Frequency characteristics (Typ.)

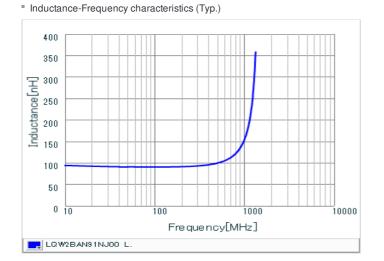



#### 🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.