

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail housing, Lower housing part with metal foot catch, with vents, width: 37.6 mm, height: 120.6 mm, depth: 64.3 mm, cross connection: DIN rail connector (optional), number of positions cross connector: 8, color: light gray (7035)

### Your advantages

- ✔ Item is from the ME-IO product range
- ✔ Tool-free mounting
- ✔ Available in overall widths from 37.6 mm
- ✔ Inflammability class V0 according to UL 94
- ✔ Front push-in connection technology
- ✔ Can be mounted on the DIN rail
- ✔ Optional with bus connector for DIN rail mounting



### Key Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Packing unit                         | 10 pc         |
| Minimum order quantity               | 10 pc         |
| GTIN                                 |               |
| GTIN                                 | 4055626199290 |
| Weight per Piece (excluding packing) | 46.760 g      |
| Custom tariff number                 | 85472000      |
| Country of origin                    | Germany       |

### Technical data

#### Item properties

|                           |  |
|---------------------------|--|
| Brief article description | Mounting base housing                    |
| Type                      | ME-IO 37,6 B 10U TBUS 7035               |
| Order No.                 | 2202663                                  |
| Housing type              | DIN rail housing                         |
| Type                      | Lower housing part with metal foot catch |

# Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

## Technical data

### Item properties

|                              |                     |
|------------------------------|---------------------|
| Max. IP code to attain       | IP20                |
| Mounting type                | DIN rail mounting   |
| Ventilation openings present | yes                 |
| Max. number of positions     | 96 (pitch: 3.45 mm) |
|                              | 64 (pitch: 5 mm)    |

### Dimensions

|                                       |          |
|---------------------------------------|----------|
| Width [ w ]                           | 37.6 mm  |
| Height [ h ]                          | 120.6 mm |
| Depth [ d ]                           | 64.3 mm  |
| Depth from top edge of DIN rail [ d ] | 57.7 mm  |

### Material data

|  |                   |
|--|-------------------|
| Color (RAL)                            | light gray (7035) |
| Flammability rating according to UL 94 | V0                |
| Housing material                       | Polyamide         |

### Ambient conditions

|   |  |
|---|--|
| Ambient temperature (storage/transport) | -40 °C ... 55 °C                                   |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                   |
| Ambient temperature (operation)         | -40 °C ... 105 °C (depending on power dissipation) |
| Relative humidity (storage/transport)   | 80 %   |

### PCB data

|                       |                                |
|-----------------------|--------------------------------|
| Number of PCB holders | 2                              |
| PCB thickness         | 1.4 mm ... 1.8 mm              |
| Mounting position     | Vertical (horizontal DIN rail) |
| Total PCB surface     | 7744 mm <sup>2</sup>           |
| Type of PCB mount     | Latching                       |

### Power dissipation, single housing at 20 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 20 °C    |
| Reduction factor    | 1        |
| Mounting position   | vertical |
| Power dissipation   | 5.4 W    |

### Power dissipation, single housing at 30 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 30 °C    |
| Reduction factor    | 0.91     |
| Mounting position   | vertical |
| Power dissipation   | 4.9 W    |

### Power dissipation, single housing at 40 °C

|                     |       |
|---------------------|-------|
| Ambient temperature | 40 °C |
| Reduction factor    | 0.81  |

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Technical data

#### Power dissipation, single housing at 40 °C

|                   |          |
|-------------------|----------|
| Mounting position | vertical |
| Power dissipation | 4.4 W    |

#### Power dissipation, single housing at 50 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 50 °C    |
| Reduction factor    | 0.7      |
| Mounting position   | vertical |
| Power dissipation   | 3.8 W    |

#### Power dissipation, single housing at 60 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 60 °C    |
| Reduction factor    | 0.57     |
| Mounting position   | vertical |
| Power dissipation   | 3.1 W    |

#### Mechanical strength/tumbling barrel

|                       |                        |
|-----------------------|------------------------|
| Specification         | IEC 60068-2-31:2008-05 |
| Height of fall        | 50 cm                  |
| Number of drop cycles | 50                     |

#### Vibration test

|                        |                        |
|------------------------|------------------------|
| Specification          | IEC 60068-2-6:2007-12  |
| Frequency              | 10 - 150 - 10 Hz       |
| Sweep speed            | 1 octave/min           |
| Amplitude              | 0.35 mm (10 - 60.1 Hz) |
| Acceleration           | 5 g (60.1 - 150 Hz)    |
| Test duration per axis | 2.5 h                  |
| Test directions        | X-, Y- and Z-axis      |

#### Shock

|                                |                                   |
|--------------------------------|-----------------------------------|
| Specification                  | IEC 60068-2-27:2008-02            |
| Pulse shape                    | Semi-sinusoidal                   |
| Acceleration                   | 15g                               |
| Shock duration                 | 11 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |

#### Thermostability (Ball Thrust Test)

|               |                        |
|---------------|------------------------|
| Specification | IEC 60695-10-2:2014-02 |
| Temperature   | 125 °C                 |
| Test duration | 1 h                    |
| Force         | 20                     |

#### Test for assessing the risk of fire (glow wire)

|               |                        |
|---------------|------------------------|
| Specification | IEC 60695-2-11:2014-02 |
|---------------|------------------------|

# Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

## Technical data

### Test for assessing the risk of fire (glow wire)

|                  |        |
|------------------|--------|
| Temperature      | 850 °C |
| Time of exposure | 30 s   |

### Test for substances that would hinder coating with paint or varnish

|               |                      |
|---------------|----------------------|
| Specification | VW PV 3.10.7:2005-02 |
|---------------|----------------------|

### Degrees of protection provided by housings (IP code)

|                                       |   |
|---------------------------------------|---|
| Specification                         | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
| Result, degree of protection, IP code | IP20  |

### General information

|              |   |
|--------------|---|
| Type of note | Assembly instruction:   |
| Note         | Refer to the data sheet for the range in the download area.           |
| Type of note | Recommendation  |
| Note         | Material of contact pads for bus connector, galvanic gold (hard gold) |

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 10                  |
| Denomination packing units | Pcs.                |
| Outer packaging type       | Carton              |

### Standards and regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|


### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

# Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

Dimensional drawing

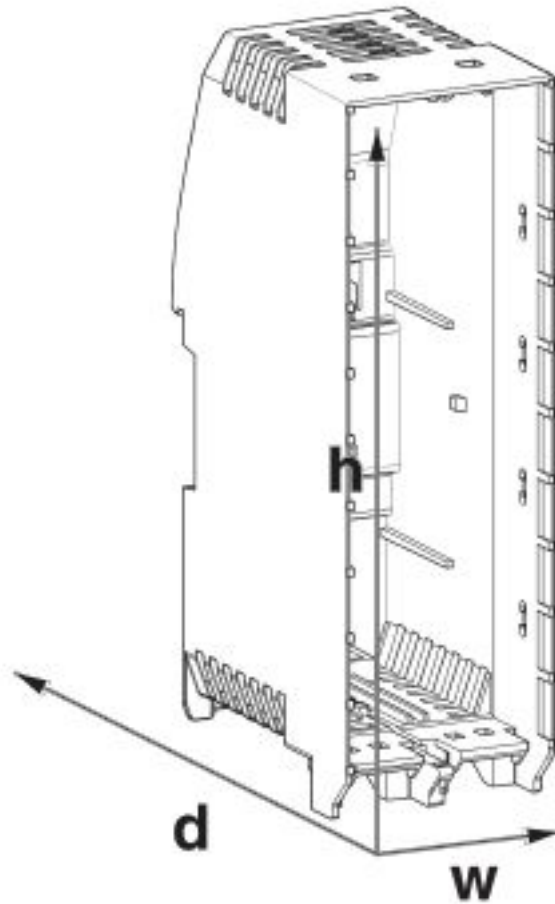

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.0 | 27371300 |
| eCl@ss 5.1 | 27371300 |
| eCl@ss 6.0 | 27180800 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |
| eCl@ss 9.0 | 27182702 |

### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC001031 |
| ETIM 6.0 | EC001031 |

# Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 7.0 | EC001031 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 31261501 |
| UNSPSC 18.0 | 31261501 |
| UNSPSC 19.0 | 31261501 |
| UNSPSC 20.0 | 31261501 |
| UNSPSC 21.0 | 31261501 |

## Approvals

### Approvals

---

#### Approvals

UL Recognized

---

Ex Approvals

---

### Approval details

|               |   |   |               |
|---------------|---|---|---------------|
| UL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 240868 |
|---------------|---|---|---------------|

## Accessories

### Accessories

Component housing upper part

Housing cover - ME-IO 18,8 C 2U 7035 - 2201799



DIN rail housing, 2U, Housing cover, width: 18.9 mm, height: 21.8 mm, color: light gray (7035)

---

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Housing cover - ME-IO 18,8 C 3U 7035 - 2201800



DIN rail housing, 3U, Housing cover, width: 18.9 mm, height: 32.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 3U S1 7035 - 2201801



DIN rail housing, 3U, Housing cover, width: 18.9 mm, height: 32.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 4U 7035 - 2201802



DIN rail housing, 4U, Housing cover, width: 18.9 mm, height: 43.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 5U 7035 - 2201803



DIN rail housing, 5U, Housing cover, width: 18.9 mm, height: 54.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 6U 7035 - 2201804



DIN rail housing, 6U, Housing cover, width: 18.9 mm, height: 65.8 mm, color: light gray (7035)

---

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Housing cover - ME-IO 18,8 C 7U 7035 - 2201805



DIN rail housing, 7U, Housing cover, width: 18.9 mm, height: 76.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 8U 7035 - 2202634



DIN rail housing, 8U, Housing cover, width: 18.9 mm, height: 87.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 10U 7035 - 2202630



DIN rail housing, 10U, Housing cover, width: 18.9 mm, height: 109.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 2U MC10 7035 - 2202582



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 C 2U MC18 7035 - 2202581



DIN rail housing, 2U for marking lid, Housing cover, width: 18.9 mm, height: 21.9 mm, color: light gray (7035)

---



## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Housing cover - ME-IO 37,6 C 10U 7035 - 2202665



DIN rail housing, 10U, Housing cover, width: 37.89 mm, height: 109.8 mm, color: light gray (7035)

---

Housing cover - ME-IO 18,8 F-LR 7035 - 2202635



DIN rail housing, Filler plugs, Housing cover, width: 11.7 mm, height: 16.1 mm, color: light gray (7035)

---

Housing cover - ME-IO P 10U 7035 - 2202629



DIN rail housing, Partition plate, Housing cover, width: 2.69 mm, height: 112.2 mm, color: light gray (7035)

---

### DIN rail connector

DIN rail bus connectors - ME 18,8 TBUS 1,5/5-ST-3,81KMGY - 2201813



DIN rail connector, number of positions: 5, pitch: 3.81 mm, color: light gray, contact surface: Gold, Articles with gold-plated contacts, bus connectors for connecting with electronic housings

---

DIN rail bus connectors - TBUS8-18,8-PPPPPPPP-7035 - 2202396



DIN rail connector, number of positions: 8, pitch: 2.54 mm, color: light gray, 8 parallel contacts

---

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

DIN rail bus connectors - TBUS8-18,8-PPPPPPPS-7035 - 2202399



DIN rail connector, number of positions: 8, pitch: 2.54 mm, color: light gray, 7 parallel contacts/1 series contact

---

DIN rail bus connectors - TBUS8-18,8-PPPPPPSS-7035 - 2202403



DIN rail connector, number of positions: 8, pitch: 2.54 mm, color: light gray, 6 parallel contacts/2 series contacts

---

### Fiber optic

Fiber optic - HS LC-H-D2/ R2XC1-2,54 - 2202316



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

---

Fiber optic - HS LC-H-D2/ R2XC2-2,54 - 2202317



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

---

Fiber optic - HS LC-H-D2/ R2XC5-2,54 - 2202318



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

---

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Fiber optic - HS LC-H-D2/ R2XC10-2,54 - 2202319



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic - HS LC-H-D2/ R4XC2-2,54 - 2202320



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic - HS LC-H-D2/ R4XC5-2,54 - 2202321



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic - HS LC-H-D2/ R4XC9-2,54 - 2202322



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Fiber optic - HS LC-H-D2/ R4XC10-2,54 - 2202323



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Fiber optic - HS LC-H-D2/ R2XC4-2,54 - 2202531



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

---

Fiber optic - HS LC-H-D2/ R4XC4-2,54 - 2202532



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

---

### Ground contact

Functional earth ground contact - ME BUS FE CONTACT - 2278076



DIN rail housing, FE contact

---

### Mounting material

Cover - ME-IO 18,8 MC 8U TRANS - 2202627



DIN rail housing, 8U, Marking lid, width: 18.8 mm, height: 110.95 mm

---

Locking - HSC-LR 9U KIT 2003 - 2201794



DIN rail housing, 9U, Lock and Release system, width: 16.1 mm, height: 111.8 mm, depth: 8.8 mm, color: orange (2003)

---

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Locking - HSC-LR 7U KIT 2003 - 2201795



DIN rail housing, 7U, Lock and Release system, width: 16.1 mm, height: 89.95 mm, depth: 8.8 mm, color: orange (2003)

---

Locking - HSC-LR 5U KIT 2003 - 2201796



DIN rail housing, 5U, Lock and Release system, width: 16.1 mm, height: 67.95 mm, depth: 8.8 mm

---

Locking - HSC-LR 3U KIT 2003 - 2201797



DIN rail housing, 3U, Lock and Release system, width: 16.1 mm, height: 45.95 mm, depth: 8.8 mm

---

Cover - ME-IO 18,8 MC 8U TRANS - 2202627



DIN rail housing, 8U, Marking lid, width: 18.8 mm, height: 110.95 mm

---

Base latch - ME-IO 18,8 FOOT CATCH KIT - 2201812

Base latch, for DIN rail mounting, with spring included



### PCB headers

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Feed-through header - HSCH 2,5-3U/12 9005 - 2201788



PCB headers, number of positions: 12, pitch: 5 mm, color: black, contact surface: Tin, mounting: Wave soldering

---

Feed-through header - HSCH 2,5-2U/ 8 9005 - 2201789



PCB headers, number of positions: 8, pitch: 5 mm, color: black, contact surface: Tin, mounting: Wave soldering,  
Please observe the derating curve of the item

---

Feed-through header - HSCH 2,5-2U-TTTT 9005 - 2201790



PCB headers, number of positions: 4, pitch: 5 mm, color: black, contact surface: Tin, mounting: Wave soldering,  
Please observe the derating curve of the item

---

Feed-through header - HSCH 2,5-2U-2220 9005 - 2201792



PCB headers, number of positions: 6, pitch: 5 mm, color: black, contact surface: Tin, mounting: Wave soldering,  
Please observe the derating curve of the item

---

Feed-through header - HSCH 1,5-3U/18 9005 - 2202232



HSC header, touch-proof, 3 units, 18 connections, please note the positioning, color: black

---

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Feed-through header - HSCH 1,5-2U/12 9005 - 2202233



PCB headers, nominal current: 8 A, rated voltage (III/2): 30 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 12, pitch: 3.45 mm, color: black, contact surface: Tin, Please observe the derating curve of the item

---

### PCB plug

Printed-circuit board connector - HSCP-SP 2,5-1U4-7035 - 2201780



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: orange

---

Printed-circuit board connector - HSCP-SP 2,5-1UTT-7035 - 2201781



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: orange

---

Printed-circuit board connector - HSCP-SP 2,5-1U20-7035 - 2201782



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Please observe the derating curve of the item

---

Printed-circuit board connector - HSCP-SP 2,5-1U-00 CPX - 2202585



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, connection method: Push-in spring connection

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Printed-circuit board connector - HSCP-SP 2,5-1UTT-55/55-7035 - 2202607



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: green

Printed-circuit board connector - HSCP-SP 2,5-1U4-00/00-7035 - 2202569



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: black

Printed-circuit board connector - HSCP-SP 2,5-1U4-22/22-7035 - 2202572



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: red

Printed-circuit board connector - HSCP-SP 2,5-1U4-66/66-7035 - 2202570



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: blue

Printed-circuit board connector - HSCP-SP 2,5-1U4-55/55-7035 - 2202571



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: green



## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Printed-circuit board connector - HSCP-SP 2,5-1U4-99/99-7035 - 2202568



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring lever: white

Printed-circuit board connector - HSCP-SP 2,5-1UTT-62/62-7035 - 2202606



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring levers: blue / red

Printed-circuit board connector - HSCP-SP 2,5-1U4-69/69-7035 - 2202605



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring levers: blue / white

Printed-circuit board connector - HSCP-SP 2,5-1U4-99/62-7035 - 2202608



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, Color of the spring levers: white / blue / white / red

Printed-circuit board connector - HSCP-SP 2,5-1U4-29/29-7035 - 2203192



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin

## Mounting base housing - ME-IO 37,6 B 10U TBUS 7035 - 2202663

### Accessories

Printed-circuit board connector - HSCP-SP 2,5-1U4-62/59-7035 - 2203194



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin

Printed-circuit board connector - HSCP-SP 2,5-1U4-65/65-7035 - 2203195



PCB connector, nominal current: 8 A, rated voltage (III/2): 300 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 4, pitch: 5 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin

Printed-circuit board connector - HSCP-SP 1,5-1U6-7035 - 2202234



PCB connector, nominal current: 8 A, rated voltage (III/2): 320 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 6, pitch: 3.45 mm, connection method: Push-in spring connection, color: light gray, Color of the spring lever: orange

Printed-circuit board connector - HSCP-SP 1,5-1U6-629/629-7035 - 2202609



PCB connector, nominal current: 8 A, rated voltage (III/2): 320 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 6, pitch: 3.45 mm, connection method: Push-in spring connection, color: light gray, Color of the spring levers: blue / red / white