

Device marker - UC-EMSP (50X30) - 0828709

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Device marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: screw, rivet, lettering field size: 50 x 30 mm, Number of individual labels: 3

Your advantages

- ✓ The UC-EMSP ... UniCard labeling range includes markers that can be attached using screws or rivets
- ✓ The wide temperature range means that the labels can be used in control cabinets as well as the field
- ✓ The markers, which are supplied in uniform sheets, can be labeled quickly and easily using the BLUEMARK LED
- ✓ Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- ✓ The sheets provide space for including function texts
- ✓ The format automatically ensures printing with a high degree of positioning accuracy

Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| GTIN |  4 046356 521956 |
| GTIN | 4046356521956 |
| Weight per Piece (excluding packing) | 11.900 g |
| Custom tariff number | 39269097 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|---------------|---------|
| Length (b) | 30 mm |
| Width (a) | 60 mm |
| Hole diameter | 3.20 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 120 °C |
|---------------------------------|-------------------|

General

Device marker - UC-EMSP (50X30) - 0828709

Technical data

General

| | |
|---|-------------------------------------|
| Color | white |
| Components | free from silicone and halogen |
| Flammability rating according to UL 94 | V2 |
| Material | PA |
| RoHS compliant | Yes |
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Number of individual labels | 3 |
| Number of individual labels per row | 1 |
| Printability | UV LED technology |
| Device | 5147999 BLUEMARK CLED |
| Test for substances that would hinder coating with paint or varnish | VW PV 3.10.7:2005-02 |
| Result | Test passed |
| Test specification weathering-resistance | Following ISO 4892-2:2013-03 |
| Test duration | 96 h |
| Result of weather resistance test | Test passed |
| Salt spray test specification | DIN EN 60068-2-11:2000-02 |
| Test duration | 96 h |
| Salt spray testing result | Test passed |
| Wipe resistance of test specification inscriptions | DIN EN 61010-1 (VDE 0411-1):2011-07 |
| Result of wipe resistance test | Test passed |
| Marking mounting type | screw, rivet |
| Result | Test passed |
| Oxygen index (DIN EN ISO 4589-2) | 28,2% |
| Class I | 3 |
| Class F | 2 |
| R22 | HL 1 - HL 2 |
| R23 | HL 1 - HL 2 |
| R24 | HL 1 - HL 2 |

Standards and Regulations

| | |
|--|-----------------------------|
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Flammability rating according to UL 94 | V2 |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|------------|---|

Drawings

Device marker - UC-EMSP (50X30) - 0828709

Dimensional drawing

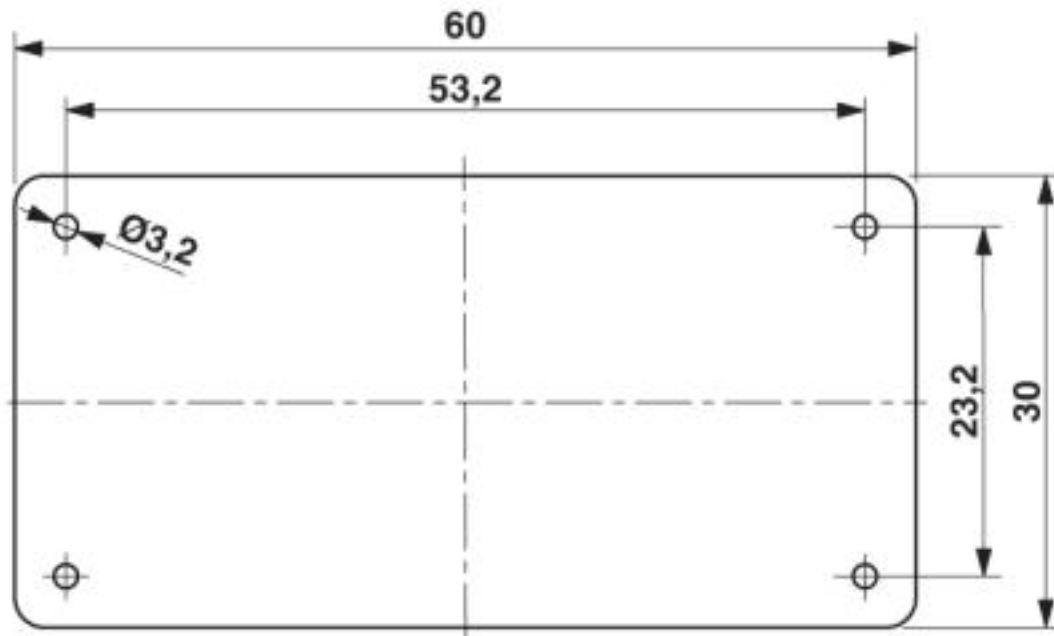

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27400629 |
| eCl@ss 4.0 | 24190200 |
| eCl@ss 4.1 | 24190200 |
| eCl@ss 5.0 | 27149100 |
| eCl@ss 5.1 | 27141100 |
| eCl@ss 6.0 | 27149100 |
| eCl@ss 7.0 | 27149129 |
| eCl@ss 8.0 | 27149129 |
| eCl@ss 9.0 | 27400629 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 5.0 | EC001288 |
| ETIM 6.0 | EC001288 |
| ETIM 7.0 | EC001288 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |

Device marker - UC-EMSP (50X30) - 0828709

Classifications

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 39131504 |
| UNSPSC 18.0 | 39131504 |
| UNSPSC 19.0 | 39131504 |
| UNSPSC 20.0 | 39131504 |
| UNSPSC 21.0 | 39131504 |

Accessories

Accessories

Magazine

Magazine - P1 UC-MAG 6 - 5146121



Magazine, for CMS-P1-PLOTTER and PLOTMARK, for accommodating UC-EMP..., UC-EMLP...