

PCB terminal block - PTSA 1,5/ 6-3,5-F MIX NZ08 - 1713075

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The figure shows a 10-position version of the product


PCB terminal block, nominal current: 8 A, rated voltage (III/2): 250 V, nominal cross section: 1.5 mm², pitch: 3.5 mm, number of positions: 6, connection method: Push-in spring connection, mounting: Wave soldering, conductor/PCB connection direction: 45 °, color: multi-color, Pin layout: Linear front pinning, Solder pin [P]: 3.6 mm

Your advantages

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Angled connection enables multi-row arrangement on the PCB



Key Commercial Data

| | |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 160 pc |
| Minimum order quantity | 160 pc |
| GTIN |  4 046356 088817 |
| GTIN | 4046356088817 |
| Weight per Piece (excluding packing) | 2.940 g |
| Custom tariff number | 85369010 |
| Country of origin | China |
| Note | Made to Order (non-returnable) |

Technical data

Item properties

| | |
|---------------------------|---------------------------|
| Brief article description | PCB terminal block |
| Range of articles | PTSA 1,5 |
| Pitch | 3.5 mm |
| Number of positions | 6 |
| Connection method | Push-in spring connection |
| Mounting type | Wave soldering |
| Pin layout | Linear front pinning |

PCB terminal block - PTSA 1,5/ 6-3,5-F MIX NZ08 - 1713075

Technical data

Item properties

| | |
|-----------------------|---|
| Number of levels | 1 |
| Number of connections | 6 |
| Number of potentials | 6 |

Electrical parameters

| | |
|-----------------------------|--------|
| Nominal current | 8 A |
| Nom. voltage | 250 V |
| Rated voltage | 200 V |
| Rated voltage (III/2) | 250 V |
| Rated voltage (II/2) | 400 V |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2) | 2.5 kV |

Connection capacity

| | |
|-----------------------------------------------------------------------|----------------------------------------------|
| Connection method | Push-in spring connection |
| pluggable | no |
| Conductor cross section solid | 0.2 mm ² ... 1.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 1.5 mm ² |
| Conductor cross section AWG / kcmil | 24 ... 16 |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm ² ... 1 mm ² |
| Conductor cross section, flexible, with ferrule, with plastic sleeve | 0.25 mm ² ... 0.5 mm ² |
| Stripping length | 9 mm |

Material data - contact

| | |
|------------------------------------------|-----------------------------------------------------------------------------------|
| Note | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
| Contact material | Cu alloy |
| Surface characteristics | hot-dip tin-plated |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn) |
| Metal surface soldering area (top layer) | Tin (4 - 8 µm Sn) |

Material data - housing

| | |
|-------------------------------------------------------------------|-------------|
| Housing color | multi-color |
| Insulating material | PA |
| Insulating material group | I |
| CTI according to IEC 60112 | 600 |
| Flammability rating according to UL 94 | V0 |
| Glow wire flammability index GWFI according to EN 60695-2-12 | 850 |
| Glow wire ignition temperature GWIT according to EN 60695-2-13 | 775 |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C |

Dimensions for the product

PCB terminal block - PTSA 1,5/ 6-3,5-F MIX NZ08 - 1713075

Technical data

Dimensions for the product

| | |
|-----------------------------|----------------------------------------------------------------------------|
| Caption | The figure shows the dimensional drawing of the 5-position product version |
| Length [l] | 12 mm |
| Width [w] | 22.5 mm |
| Height [h] | 16.7 mm |
| Pitch | 3.5 mm |
| Height (without solder pin) | 13.1 mm |
| Solder pin [P] | 3.6 mm |
| Pin spacing | 3.5 mm |
| Pin dimensions | 0.4 x 0.75 mm |
| Dimension a | 17.5 mm |

Dimensions for PCB design

| | |
|---------------|--------|
| Hole diameter | 1 mm |
| Pin spacing | 3.5 mm |

Packaging information

| | |
|----------------------------|---------------------|
| Type of packaging | packed in cardboard |
| Pieces per package | 160 |
| Denomination packing units | Pcs. |

Ambient conditions

| | |
|-----------------------------------------|-------------------------------------------------------------------------------|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Ambient temperature (assembly) | -5 °C ... 85 °C |
| Ambient temperature (operation) | -40 °C ... 100 °C (Depending on the current carrying capacity/derating curve) |

Termination and connection method

| | |
|------------------------------------------|---------------------|
| Test for conductor damage and slackening | IEC 60999-1:1999-11 |
| | Test passed |

Pull-out test

| | |
|----------------------------------------------------------|-----------------------------------------|
| Pull-out test | IEC 60999-1:1999-11 |
| | Test passed |
| Conductor cross section / conductor type / tensile force | 0.5 mm ² / solid / > 20 N |
| | 0.5 mm ² / flexible / > 20 N |
| | 1.5 mm ² / solid / > 40 N |
| | 1.5 mm ² / flexible / > 40 N |

Electrical tests

| | |
|-----------------------------|---------------------|
| Rated current | 8 A |
| Conductor cross section | 1.5 mm ² |
| Rated voltage (III/2) | 250 V |
| Rated surge voltage (III/2) | 2.5 kV |

PCB terminal block - PTSA 1,5/ 6-3,5-F MIX NZ08 - 1713075

Technical data

Air clearances and creepage distances

| | |
|-------------------------------------------------|-------------------------------------------------------|
| Clearances and creepage distances | IEC 60947-1:2007-06 + A1:2010-12 + A2:2014-09 |
| Specification | IEC 60947-1:2007-06 + A1:2010-12 + A2:2014-09 |
| Minimum clearance - inhomogeneous field (III/3) | 1.5 mm |
| Minimum clearance - inhomogeneous field (III/2) | 1.5 mm |
| Minimum clearance - inhomogeneous field (II/2) | 1.5 mm |
| Minimum creepage distance value (III/3) | 2.5 mm |
| Minimum creepage distance value (III/2) | 1.5 mm |
| Minimum creepage distance value (II/2) | 2 mm |
| Note on connection cross section | With connected conductor 1.5 mm ² (solid). |

Temperature-rise test

| | |
|---------------|-----------------------|
| Result | Test passed |
| Specification | IEC 60947-7-4:2013-08 |

Vibration test

| | |
|------------------------|------------------------|
| Specification | IEC 60068-2-6:2007-12 |
| Result | Test passed |
| Frequency | 10 - 150 - 10 Hz |
| Sweep speed | 1 octave/min |
| Amplitude | 0.35 mm (10 - 60.1 Hz) |
| Test duration per axis | 2.5 h |

Standards and Regulations

| | |
|----------------------------------|--------|
| Connection in acc. with standard | EN-VDE |
| | CUL |


Environmental Product Compliance

| | |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

PCB terminal block - PTSA 1,5/ 6-3,5-F MIX NZ08 - 1713075

Diagram

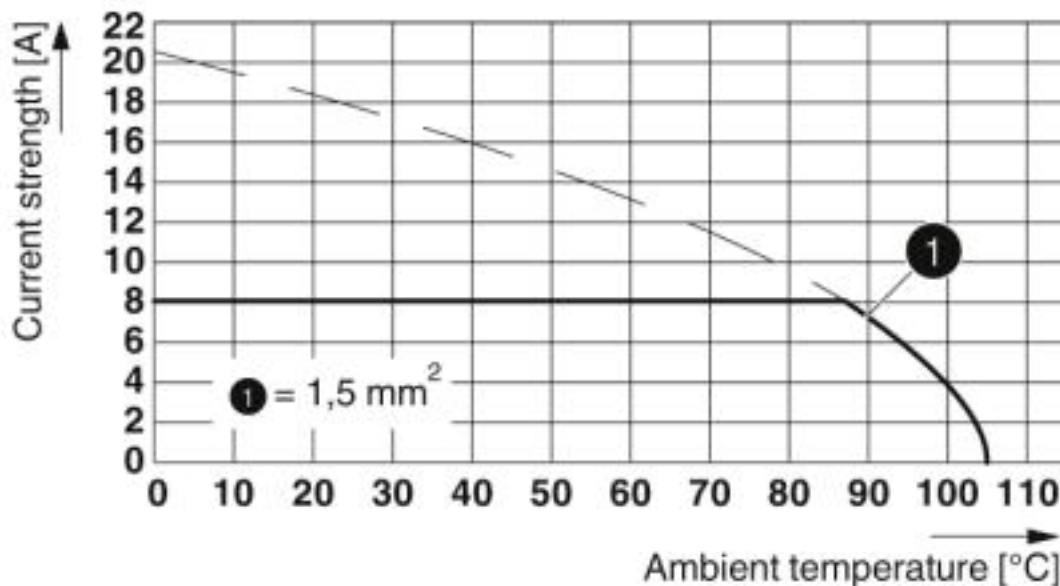

Type: PTSA 1,5/...-3,5-F

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27260700 |
| eCl@ss 4.1 | 27141100 |
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27261100 |
| eCl@ss 6.0 | 27261100 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002643 |
| ETIM 5.0 | EC002643 |
| ETIM 6.0 | EC002643 |
| ETIM 7.0 | EC002643 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11 | 34131203 |
| UNSPSC 12.01 | 39121432 |

PCB terminal block - PTSA 1,5/ 6-3,5-F MIX NZ08 - 1713075

Classifications

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 39121432 |
| UNSPSC 18.0 | 39121432 |
| UNSPSC 19.0 | 39121432 |
| UNSPSC 20.0 | 39121432 |
| UNSPSC 21.0 | 39121432 |

Approvals

Approvals


Approvals


CCA / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized


Ex Approvals

Approval details

| | |
|----------------------------|------------------------|
| CCA | CCA/DE1 34182/33276 |
| Nominal current IN | 2 A |
| mm ² /AWG/kcmil | 0.75 |

| | | | |
|--------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit Fertigungsüberwachung |  | http://www2.vde.com/de/Institut/Online-Service/ VDE-gepruefteProdukte/Seiten/Online-Suche.aspx | 40018594 |
| Nominal voltage UN | 130 V | | |
| Nominal current IN | 2 A | | |
| mm ² /AWG/kcmil | 0.5-.75 | | |

| | | |
|-----|-------------------------------------------------------------------------------------|---------|
| EAC |  | B.01687 |
|-----|-------------------------------------------------------------------------------------|---------|

| | | | |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E60425-20030527 |
| Nominal voltage UN | B 300 V | D 300 V | |

PCB terminal block - PTSA 1,5/ 6-3,5-F MIX NZ08 - 1713075

Approvals

| | B | D |
|--------------------------------|-------|-------|
| Nominal current I _N | 5 A | 5 A |
| mm ² /AWG/kcmil | 24-16 | 24-16 |