



ISO Cylinder Series C85




ø8, ø10, ø12, ø16, ø20, ø25

Conforms to ISO 6432 and CETOP RP52P




CJ1
CJP
CJ2
CM2
C85
C76
CG1
MB
MB1
CP95
C95
C92
CA1
CS1

Variations

Series	Action	Rod style	Cushion	Head cover style				Switch mount		Rot boot (ø20, 25)	Bore (mm)	Page	
				N	E	F	Y	Rail	Band				
Standard Series C85 	Double acting	Single	Rubber	●	●	●	●	●	●	●	ø8 to 25	1.5-2	
			Air	●	●	●	●	●	●	●	ø10 to 25		
		Double	Rubber	●	●	●	●	●	●	●	ø8 to 25		
			Air	●	●	●	●	●	●	●	ø10 to 25		
Single acting	Single (SR, SE)	Rubber	●	●	●	●	●	●	●	ø8 to 25	1.5-16		
Non-rotating rod 	Double acting	Single	Rubber	●	●	●	●	●	●	●	ø8 to 25	1.5-2	
			Air	●	●	●	●	●	●	●	ø10 to 25		
	Single acting	Single (SR, SE)	Rubber	●	●	●	●	●	●	●	ø8 to 25	1.5-16	
			Air	●	●	●	●	●	●	●	ø10 to 25		
Direct mount 	Base	Double acting	Single	Rubber	●	●	●	●	●	●	●	ø8 to 25	1.5-30
					●	●	●	●	●	●	●	ø10 to 25	
	Front	Double acting	Single	Rubber	●	●	●	●	●	●	●	ø8 to 25	
					●	●	●	●	●	●	●	ø20, 25	

SR=Spring return
SE=Spring extend

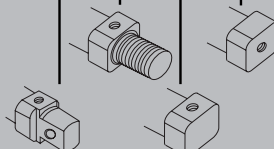

ISO Cylinder/Standard, Non-rotating Rod: Double Acting

Series C85

ø8, ø10, ø12, ø16, ø20, ø25

How to Order

**Double acting
Single rod**

**Double acting
Double rod**

C D 85 K N 20 — 40 C J A — R2

C D 85 W E 20 — 40 C JJ B

Magnet

—	None
D	Built-in magnet

Style

—	Standard
K	Non-rotating rod (only rubber bumper)

Head cover style

Symbol	Mounting
N	Basic integrated clevis
E*	Double end
F	Boss cut
Y**	Boss cut - End port

* Double acting/Double rod:
Only double end style (E).
** Except for: air cushion,
single acting (T) style.

Bore size-Stroke

Bore size (mm)	Standard stroke (mm)**	Max. stroke
ø8*	10, 25, 40, 50, 80, 100	400
ø10		
ø12		
ø16		
ø20	10, 25, 40, 50, 80, 100, 125, 160, 200, 250, 300	1000
ø25		

* Not available with air cushion.
** Other strokes available on request.

**Auto switch
mounting style**

A	Rail
B	Band

Applicable auto switches and bands are shown on p.1.5-35. Please order auto switches and bands separately.

Other variations' suffix

R*	Stainless steel piston rod, piston rod nut and mounting nut
R2*	Stainless steel piston rod and piston rod nut

* Only ø20, ø25

Rod boot (only ø20, ø25)

—	Without rod boot
J	Nylon tarpaulin one side
K	Neoprene cloth one side
JJ*	Nylon tarpaulin both sides
KK*	Neoprene cloth both sides

* In case of double acting/double rod.

Cushion

—	Rubber bumper (Standard)
C	Air cushion (only "N" execution, bores 10 to 25mm)

Mounting Bracket Part No.

Bore (mm)	8	10	12	16	20	25
Bracket						
Foot (1 pc.)	C85L10A	C85L16A	C85L25A			
Foot (2 pcs. with mounting nut 1 pc.)	C85L10B	C85L16B	C85L25B			
Flange	C85F10	C85F16	C85F25			
Trunnion	C85T10	C85T16	C85T25			
Clevis	C85C10	C85C16	C85C25			
Single knuckle joint	KJ4D	KJ6D	KJ8D	KJ10D		
Double knuckle joint	GKM4-8	GKM6-10	GKM8-16	GKM10-20		
Floating joint	JA10-4-070	JA15-6-100	JA20-8-125	JA30-10-125		

Note) Please order mounting brackets separately.

Replacement Parts

For Standard Cylinders

Bore (mm)	Kit No.	Note
20	C85-20PS	Every set includes: 1 rod seal 1 packing retaining washer 1 retaining ring
25	C85-25PS	

For Non-rotating Cylinders ("K")

Bore (mm)	Kit No.	Note
20	C85K-20PS	Every set includes: 1 rod seal 1 packing retaining washer 1 retaining ring
25	C85K-25PS	

ISO Cylinder/Standard, Non-rotating Rod: Double Acting **Series C85**



Rubber Bumper/Single Rod



Air Cushion/Single Rod



Rubber Bumper/Double Rod



Air Cushion/Double Rod



Non-rotating rod/Single Rod

Specifications


Bore size (mm)		8	10	12	16	20	25
Piston rod dia. (mm)		4	4	6	6	8	10
Piston rod thread		M4 X 0.7	M4 X 0.7	M6 X 1	M6 X 1	M8 X 1.25	M10 X 1.25
Ports		M5	M5	M5	M5	G1/8	G1/8
Action		Double acting/Single or Double rod					
Fluid		Air					
Proof pressure		1.5MPa					
Max operating pressure		1.0MPa					
Min operating pressure		0.1MPa	0.08MPa		0.05MPa		
Ambient and fluid temperature		-20 to 80°C (Built-in magnet: -10 to 60°C)					
Cushion		Rubber bumper, Air cushion (Except for ø8) (Non-rotating: only rubber bumper)					
Lubrication		Not required. If necessary turbine oil no.1 ISOVG32 is recommended					
Rod boot	Nylon tarpaulin	—				Max ambient temperature 60°C	
	Neoprene cloth	—				Max ambient temperature 110°C*	
Piston speed		50 to 1500mm/s					
Allowable kinetic energy	Rubber bumper	0.02J	0.03J	0.04J	0.09J	0.27J	0.4J
	Air cushion	—	0.17J	0.19J	0.4J	0.66J	0.97J
Non-rotating accuracy**		±1° 30'	±1° 30'	±1°	±1°	±0° 42'	±0° 42'
Stroke tolerance		0/+1				0/+1.4	

* Maximum ambient temperature of gaiters only.

** Applicable to non-rotating models only.

Symbol


Double Acting/Single Rod

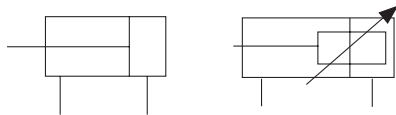

Rubber Bumper

Air Cushion


Double Acting/Double Rod

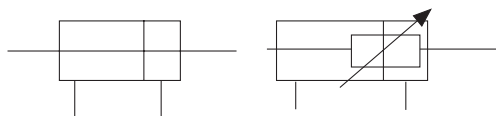

Rubber Bumper

Air Cushion

Non-rotating rod: Double Acting/Single Rod



Weight (Standard, Non-rotating rod)

(g)

Bore size (mm)		8	10	12	16	20	25
Double action	Basic weight	45	49	96	109	183(203)	258(286)
	Double rod	Add'l weight for each 10mm of stroke					
Mounting bracket	C85L□A	20		40		95	
	C85L□B	55		105		210	
	C85F□	12		25		90	
	C85T□	20		50		75	
	C85C□	20		40		85	
Accessories	Single knuckle joint	KJ□D		17		25 45 70	
	Double knuckle joint	GKM□-□		10		20 50 100	
	Floating joint	JA□-□-□		10		20 50 70	

Calculation Example: C85N10-50, C85F10

Basic weight.....49 (ø10)

Additional weight.....3.2/10mm of stroke

Cylinder stroke.....50mm

Mounting bracket.....12

49+3.2 X 50/10=65 65+12=77

() : In case of air cushion

Double acting: Single rod
C□85□8 to16 Rubber bumper (Disassembly is not possible)

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②A	Head cover N	Aluminum alloy	1	White anodized
②B	Head cover E	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch style piston)

C□85□20, 25 Rubber bumper

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②A	Head cover N	Aluminum alloy	1	White anodized
②B	Head cover E	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromated
⑥	Plain washer	Carbon steel	1	Nickel plated
⑦	Bushing	Sintered bronze	1	
⑧	Bushing	Sintered bronze	2	

No.	Description	Material	Quantity	Remarks
⑥	Bushing	Sintered bronze	1	
⑦	Magnet		1	(Switch style only)
⑧	Bumper	Urethane	2	
⑨	Piston gasket	NBR	1	(2 for switch style)
⑩	Tube gasket	NBR	2	
⑪	Rod seal	NBR	1	
⑫	Piston seal	NBR	2	
⑬	Rod end nut	Carbon steel	1	Nickel plated
⑭	Mounting nut	Carbon steel	1	Nickel plated

②A


No.	Description	Material	Quantity	Remarks
⑨	Retaining ring	Carbon steel	1	Nickel plated
⑩	Retaining ring	Carbon steel	2	
⑪	Magnet		1	(Switch style only)
⑫	Wear ring	Phenolic resin	1	
⑬	Bumper A	Urethane	1	
⑭	Bumper B	Urethane	1	
⑮	Piston gasket	NBR	1	
⑯	Rod seal	NBR	1	
⑰	Piston seal	NBR	1	
⑱	Rod end nut	Carbon steel	1	Nickel plated
⑲	Mounting nut	Carbon steel	1	Nickel plated

ISO Cylinder/Standard, Non-rotating Rod: Double Acting **Series C85**

Construction

Double acting: Single rod

C□85□10 to 16 Air cushion (Disassembly is not possible)

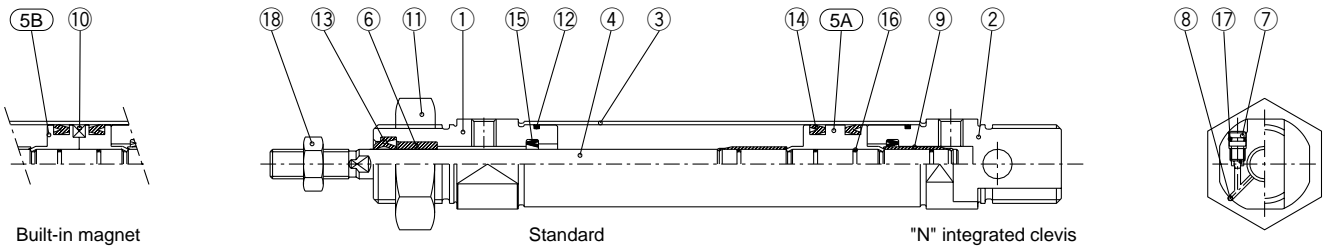


Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch style piston)
⑥	Bush	Sintered bronze	1	
⑦	Cushion needle	Stainless steel	2	
⑧	Steel ball	Bearing steel	2	

No.	Description	Material	Quantity	Remarks
⑨	Cushion ring	Brass	2	
⑩	Magnet		1	
⑪	Mounting nut	Carbon steel	1	Nickel plated
⑫	Tube gasket	NBR	2	
⑬	Rod seal	NBR	1	
⑭	Piston seal	NBR	2	
⑮	Check seal	NBR	2	
⑯	Piston gasket & cushion ring gasket	NBR	3	
⑰	Needle seal	NBR	2	
⑱	Rod end nut	Carbon steel	1	Nickel plated

C□85□20, 25 Air cushion

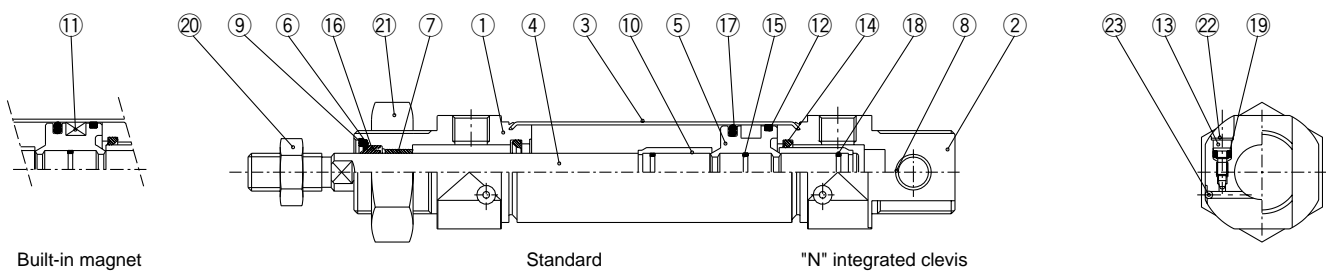

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromated
⑥	Plain washer	Carbon steel	1	Nickel plated
⑦	Bushing	Sintered bronze	1	
⑧	Bushing	Sintered bronze	1	
⑨	Retaining ring	Carbon steel	1	Nickel plated
⑩	Cushion ring	Copper alloy	2	Hard chrome plated
⑪	Magnet		1	
⑫	Wear ring	Phenolic resin	1	

No.	Description	Material	Quantity	Remarks
⑬	Cushion valve	Carbon steel	2	Nickel plated
⑭	Cushion seal	Urethane	2	
⑮	Piston gasket	NBR	1	
⑯	Rod seal	NBR	1	
⑰	Piston seal	NBR	1	
⑱	Cushion ring gasket	NBR	2	
⑲	Cushion valve packing	NBR	2	
⑳	Rod end nut	Carbon steel	1	Nickel plated
㉑	Mounting nut	Carbon steel	1	Nickel plated
㉒	Self locking ring	Stainless steel	2	
㉓	Steel ball	Stainless steel	2	

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1





CS1

Series C85

Construction

Double acting: Double rod

C□85WE 8 to 16 Rubber bumper (Disassembly is not possible)

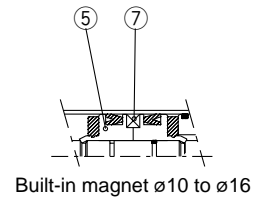
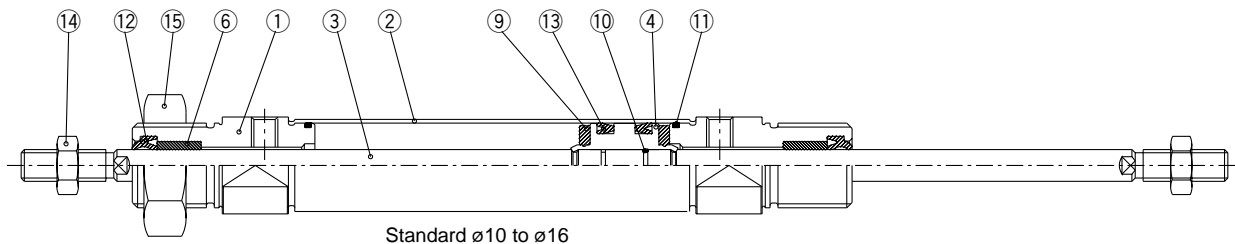


Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	2	White anodized
②	Cylinder tube	Stainless steel	1	
③	Piston rod	Stainless steel	1	2 for ø8
④	Piston A	Brass	1	
⑤	Piston B	Brass	2	(Switch style piston)
⑥	Bushing	Sintered bronze	2	
⑦	Magnet		1	(Switch style only)
⑧	Spacer	Brass	1	

No.	Description	Material	Quantity	Remarks
⑨	Bumper	Urethane	2	
⑩	Piston gasket	NBR	1	2 for switch style
⑪	Tube gasket	NBR	2	
⑫	Rod seal	NBR	2	
⑬	Piston seal	NBR	2	
⑭	Rod end nut	Carbon steel	2	Nickel plated
⑮	Mounting nut	Carbon steel	1	Nickel plated

C□85WE 20, 25 Rubber bumper

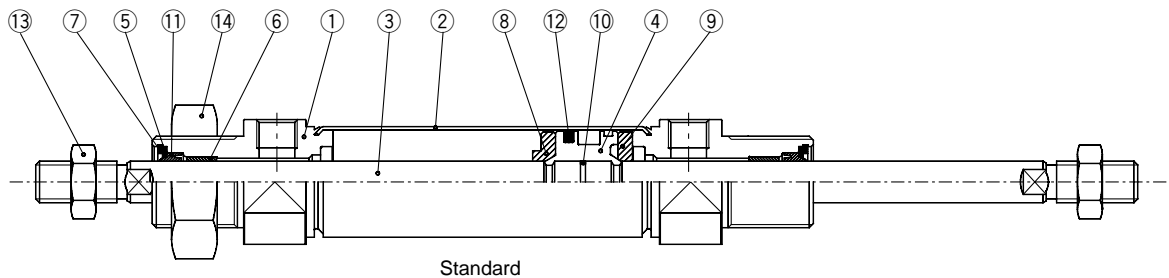

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	2	White anodized
②	Cylinder tube	Stainless steel	1	
③	Piston rod	Carbon steel	1	Hard chrome plated
④	Piston	Aluminum alloy	1	Chromated
⑤	Plain washer	Carbon steel	2	Nickel plated
⑥	Bushing	Sintered bronze	2	
⑦	Retaining ring	Carbon steel	2	Nickel plated
⑧	Bumper A	Urethane	1	


No.	Description	Material	Quantity	Remarks
⑨	Bumper B	Urethane	1	
⑩	Piston gasket	NBR	1	
⑪	Rod seal	NBR	2	
⑫	Piston seal	NBR	1	
⑬	Rod end nut	Carbon steel	2	Nickel plated
⑭	Mounting nut	Carbon steel	1	Nickel plated
⑮	Magnet		1	(Switch style only)

ISO Cylinder/Standard, Non-rotating Rod: Double Acting **Series C85**

Construction

Double acting: Double rod

C□85WE 10 to 16 Air cushion (Disassembly is not possible)

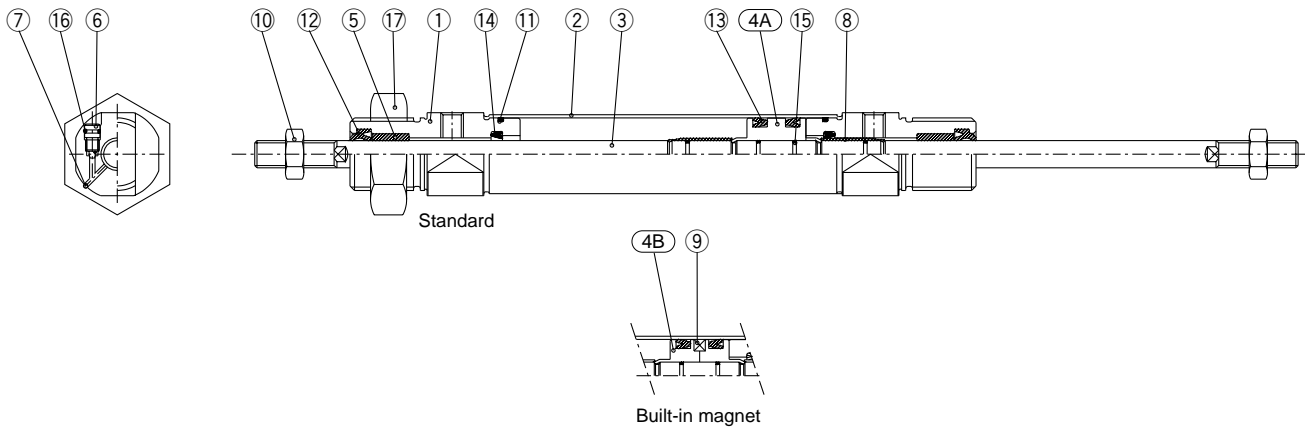


Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	2	White anodized
②	Cylinder tube	Stainless steel	1	
③	Piston rod	Stainless steel	1	
④A	Piston A	Brass	1	
④B	Piston B	Brass	2	(Switch style piston)
⑤	Bushing	Sintered bronze	2	
⑥	Cushion needle	Stainless steel	2	
⑦	Steel ball	Bearing steel	2	
⑧	Cushion ring	Brass	2	

No.	Description	Material	Quantity	Remarks
⑨	Magnet		1	
⑩	Rod end nut	Carbon steel	2	Nickel plated
⑪	Tube gasket	NBR	2	
⑫	Rod seal	NBR	2	
⑬	Piston seal	NBR	2	
⑭	Check seal	NBR	2	
⑮	Piston gasket & cushion ring gasket	NBR	3	
⑯	Needle seal	NBR	2	
⑰	Mounting nut	Carbon steel	1	Nickel plated

C□85WE 20, 25 Air cushion

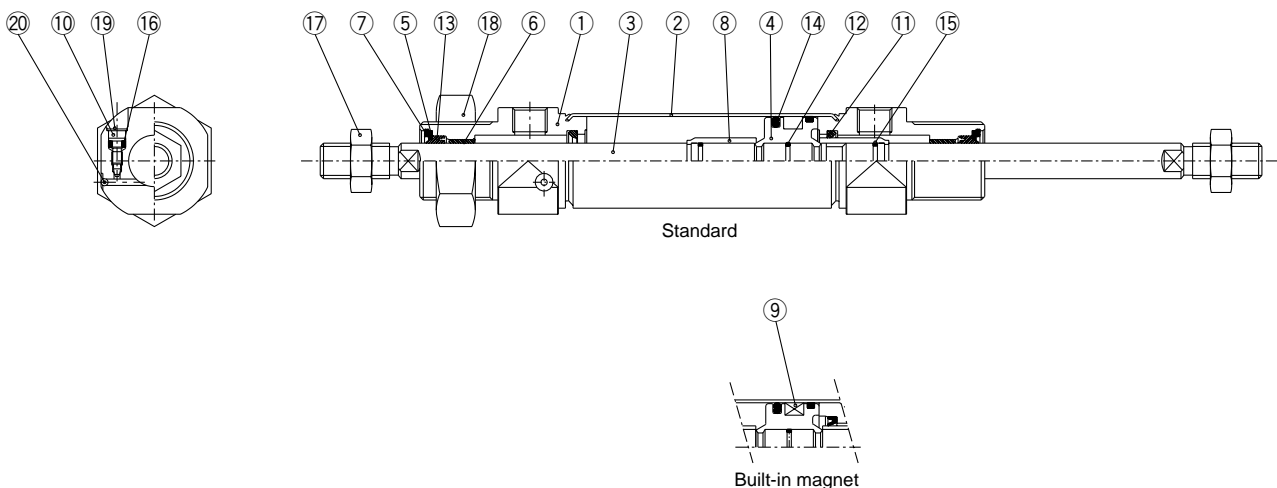

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	2	White anodized
②	Cylinder tube	Stainless steel	1	
③	Piston rod	Carbon steel	1	Hard chrome plated
④	Piston	Aluminum alloy	1	Chromated
⑤	Plain washer	Carbon steel	2	Nickel plated
⑥	Bushing	Sintered bronze	2	
⑦	Retaining ring	Carbon steel	2	Nickel plated
⑧	Cushion ring	Copper alloy	2	Hard chrome plated
⑨	Magnet			
⑩	Cushion valve	Carbon steel	2	Nickel plated

No.	Description	Material	Quantity	Remarks
⑪	Cushion seal	Urethane	2	
⑫	Piston gasket	NBR	1	
⑬	Rod seal	NBR	2	
⑭	Piston seal	NBR	1	
⑮	Cushion ring gasket	NBR	2	
⑯	Cushion valve packing	NBR	2	
⑰	Rod end nut	Carbon steel	2	Nickel plated
⑱	Mounting nut	Carbon steel	1	Nickel plated
⑲	Self locking ring	Stainless steel	2	
⑳	Steel ball	Stainless steel	2	

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1


Series C85

Dimensions

Double acting: Single rod


Rubber bumper/C□85N **Bore** — **Stroke** □

Without magnet, Built-in magnet

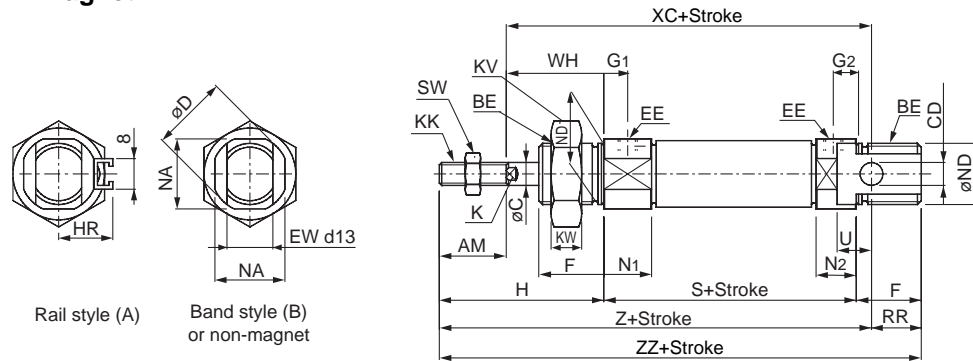


Air cushion/C□85N **Bore** — **Stroke** C □

Without magnet, Built-in magnet

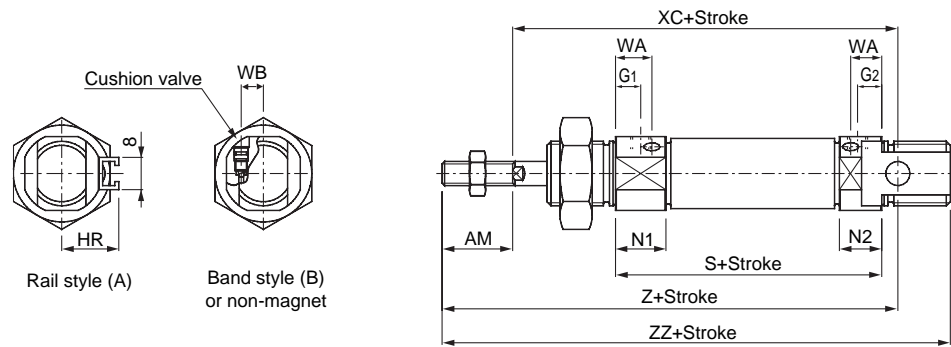


With rod boot

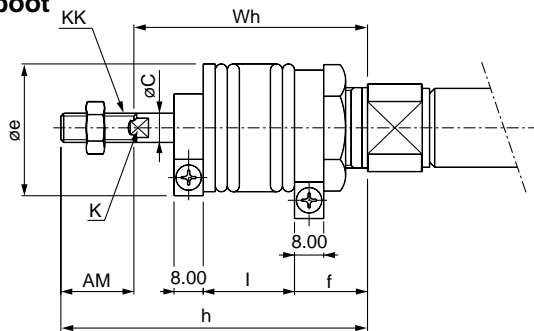

C□85KN

Non-rotating rod (Rubber bumper only)

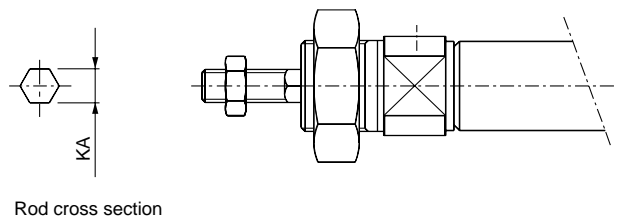

Unit: (mm)

Bore	AM	BE	øC	CD	øD	EE	EW	F	G1	G2	WA	WB	H	HR	K	KA	KK	KV	KW	N1	N2	NA	øND(h)	RR	S	SW	U	WH	XC	Z	ZZ
ø8	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5 X 0.8	8	12	7	5	—	—	28	10	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	12	10	46	7	6	16	64	76	86
ø10	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5 X 0.8	8	12	7 ^(5.5)	5 ^(5.5)	10.5	4.5	28	10.5	—	4.2	M4 X 0.7	19	6	11.5 ^(13.5)	9.5 ^(13.5)	15	12	10	46 ⁽⁵³⁾	7	6	16	64 ⁽⁷¹⁾	76 ⁽⁸³⁾	86 ⁽⁹³⁾
ø12	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5 X 0.8	12	17	8 ^(5.5)	6 ^(5.5)	9.5	5.5	38	14	5	6.2	M6 X 1	24	8	12.5 ^(12.5)	10.5 ^(12.5)	18	16	14	50 ⁽⁵⁴⁾	10	9	22	75 ⁽⁷⁹⁾	91 ⁽⁹⁵⁾	105 ⁽¹⁰⁹⁾
ø16	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5 X 0.8	12	17	8 ^(5.5)	6 ^(5.5)	9.5	5.5	38	14	5	6.2	M6 X 1	24	8	12.5 ^(12.5)	10.5 ^(12.5)	18	16	13	56 ⁽⁵⁶⁾	10	9	22	82 ⁽⁸²⁾	98 ⁽⁹⁸⁾	111 ⁽¹¹¹⁾
ø20	20	M22 X 1.5	8	8 ^{+0.036} _{-0.006}	28	G1/8	16	20	8	8	13	8.5	44	17	6	8.2	M8 X 1.25	32	10	15 ⁽¹⁷⁾	15 ⁽¹⁷⁾	24	22	11	62	13	12	24	95	115	126
ø25	22	M22 X 1.5	10	8 ^{+0.036} _{-0.006}	33.5	G1/8	16	22	8	8	13	10.5	50	20	8	10.2	M10 X 1.25	32	10	15 ⁽¹⁷⁾	15 ⁽¹⁷⁾	30	22	11	65	17	12	28	104	126	137

(): In case of air cushion.

With rod boot

Bore	Item Stroke	AM	øC	øe	f	K	KK	h							
								1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	
20		20	8	35	20	6	M8 X 1.25	71	84	96	109	134	159	—	
25		22	10	35	20	8	M10 X 1.25	74	87	99	112	137	162	187	

Bore	Item Stroke	l								Wh							
		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500		
20		12.5	25	37.5	50	75	100	—	51	64	76	89	114	139	—		
25		12.5	25	37.5	50	75	100	125	52	65	77	90	115	140	165		


ISO Cylinder/Standard, Non-rotating Rod: Double Acting **Series C85**

Dimensions

Double acting: Single rod

Rubber bumper/C□85E **Bore** **Stroke**

Without magnet, Built-in magnet


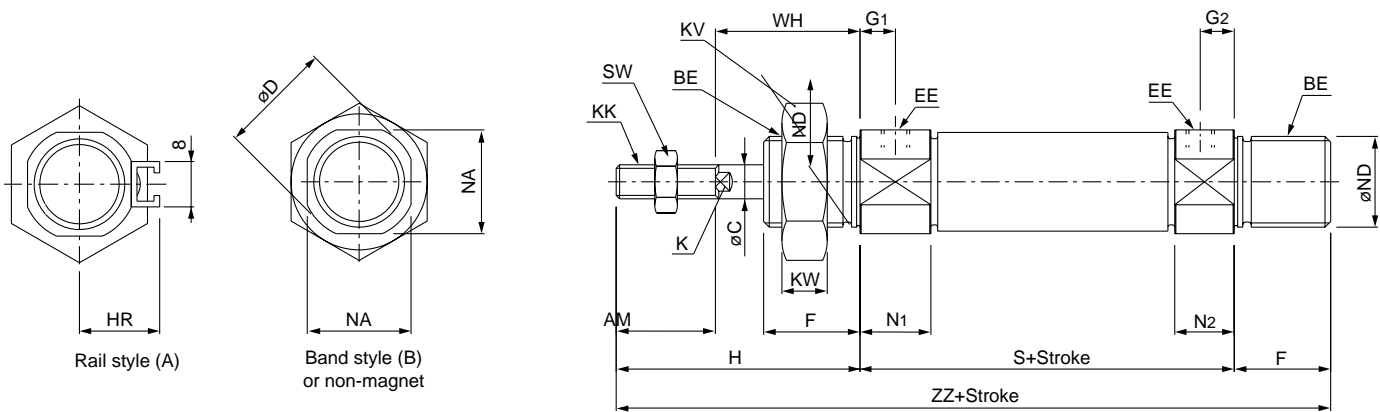


- CJ1
- CJP
- CJ2
- CM2
- C85**
- C76
- CG1
- MB
- MB1
- CP95
- C95
- C92
- CA1
- CS1

With rod boot

C□85KE

Non-rotating rod (Rubber bumper only)

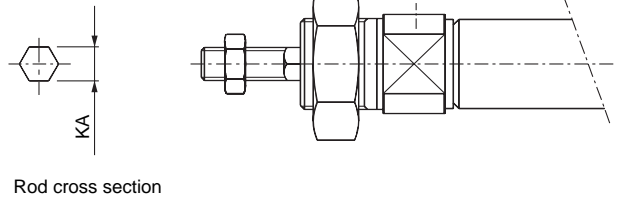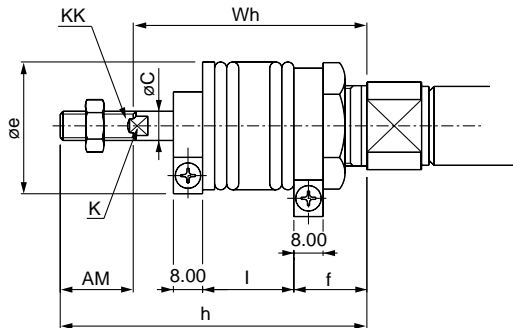

Unit: (mm)

Bore	AM	BE	øC	øD	EE	F	G1	G2	H	HR	K	KA	KK	KV	KW	N1	N2	NA	øND(h8)	S	SW	WH	ZZ
ø8	12	M12 X 1.25	4	16.7	M5 X 0.8	12	7	5	28	10	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	12	46	7	16	86
ø10	12	M12 X 1.25	4	16.7	M5 X 0.8	12	7	5	28	10.5	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	12	46	7	16	86
ø12	16	M16 X 1.5	6	19.7	M5 X 0.8	17	8	6	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	16	50	10	22	105
ø16	16	M16 X 1.5	6	19.7	M5 X 0.8	17	8	6	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	16	56	10	22	111
ø20	20	M22 X 1.5	8	27.9	G1/8	20	8	8	44	17	6	8.2	M8 X 1.25	32	10	15	15	24	22	62	13	24	126
ø25	22	M22 X 1.5	10	33.4	G1/8	22	8	8	50	20	8	10.2	M10 X 1.25	32	10	15	15	30	22	65	17	28	137


With rod boot

Bore	Item Stroke	AM	øC	øe	f	K	KK	h						
								1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20	20	20	8	35	20	6	M8 X 1.25	71	84	96	109	134	159	—
25	22	22	10	35	20	8	M10 X 1.25	74	87	99	112	137	162	187


Bore	Item Stroke	l							Wh						
		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20	20	12.5	25	37.5	50	75	100	—	51	64	76	89	114	139	—
25	22	12.5	25	37.5	50	75	100	125	52	65	77	90	115	140	165

Double acting: Single rod


Front foot, Front and rear foot: C85L10^A_B, C85L16^A_B, C85L25^A_B

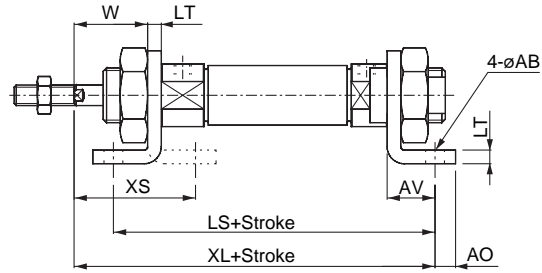


Front flange, Rear flange: C85F10, C85F16, C85F25

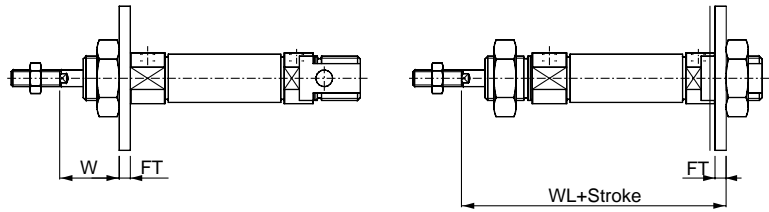

Front trunnion, Rear trunnion: C85T10, C85T16, C85T25

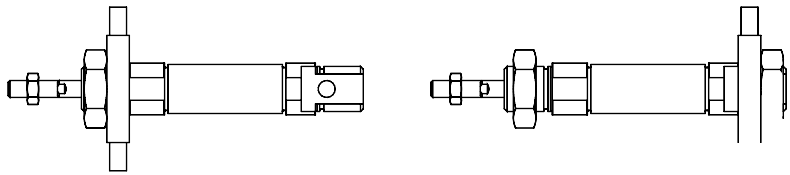

Clevis: C85C10, C85C16, C85C25

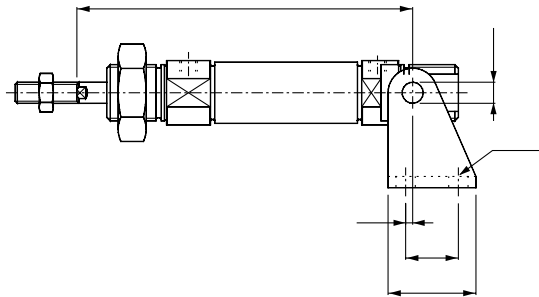

Unit: (mm)

Bore	Front foot, Front and rear foot											Front flange, Rear flange							
	AO	US	øAB	LT	NH	LS	XL	TR JS14	XS	AV	UR	W	UR	FBH13	FT	TF	UF	W	WL
ø8	5	35	4.5	3.2	16	68	73	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	65.2
ø10	5	35	4.5	3.2	16	68(75)	73(80)	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	65.2(72.2)
ø12	6	42	5.5	4	20	78(82)	86(90)	32	32	14	33	18	30	5.5	4	40	52	18	76(80)
ø16	6	42	5.5	4	20	84(84)	92(92)	32	32	14	33	18	30	5.5	4	40	52	18	82(82)
ø20	8	54	6.6	5	25	96	103	40	36	17	42	19	40	6.6	5	50	66	19	91
ø25	8	54	6.6	5	25	99	110	40	40	17	42	23	40	6.6	5	50	66	23	98

Bore																	
	TT	UW	TD e8	TM	TZ	XV	XZ	CD	AE	øAB	AO	AU	TR	LG	NH	LT	XC
ø8	6	20	4	26	38	13	65	4 ^{+0.030} ₀	8.1	4.5	1.5	13.1	12.5	20	24	2.5	64
ø10	6	20	4	26	38	13	65(72)	4 ^{+0.030} ₀	8.1	4.5	1.5	13.1	12.5	20	24	2.5	64(71)
ø12	8	25	6	38	58	18	76(80)	6 ^{+0.030} ₀	12.1	5.5	2	18.5	15	25	27	3.2	75(79)
ø16	8	25	6	38	58	18	82(82)	6 ^{+0.030} ₀	12.1	5.5	2	18.5	15	25	27	3.2	82(82)
ø20	8	32	6	46	66	20	90	8 ^{+0.036} ₀	16.1	6.6	4	24.1	20	32	30	4	95
ø25	8	32	6	46	66	24	97	8 ^{+0.036} ₀	16.1	6.6	4	24.1	20	32	30	4	104

(): In case of air cushion.

Double acting: Single rod

Rubber bumper/C□85F, Y



Without magnet, Built-in magnet



With rod boot

C□85KF, Y

Non-rotating rod (Rubber bumper only)

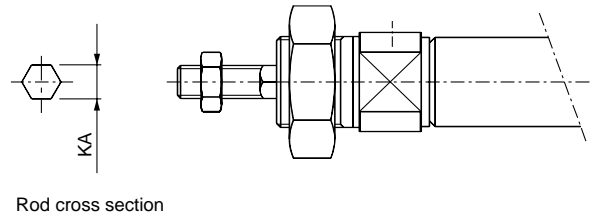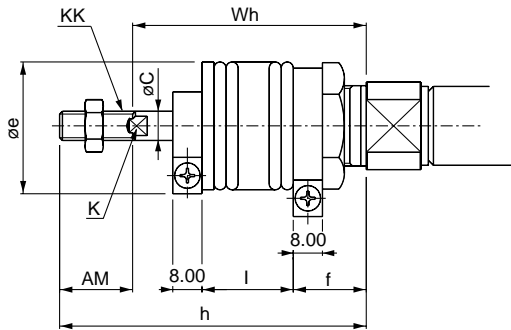

Unit: (mm)

Bore	AM	BE	øC	øD	EE	F	G1	G2	H	HR	K	KA	KK	KV	KW	N1	N2	NA	øND(h8)	S	SW	WH	Z
ø8	12	M12 X 1.25	4	16.7	M5 X 0.8	12	7	5	28	10	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	12	46	7	16	74
ø10	12	M12 X 1.25	4	16.7	M5 X 0.8	12	7	5	28	10.5	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	12	46	7	16	74
ø12	16	M16 X 1.5	6	19.7	M5 X 0.8	17	8	6	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	16	50	10	22	88
ø16	16	M16 X 1.5	6	19.7	M5 X 0.8	17	8	6	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	16	50	10	22	88
ø20	20	M22 X 1.5	8	27.9	G1/8	20	8	8	44	17	6	8.2	M8 X 1.25	32	10	15	15	24	22	62	13	24	106
ø25	22	M22 X 1.5	10	33.4	G1/8	22	8	8	50	20	8	10.2	M10 X 1.25	32	10	15	15	30	22	65	17	28	115

With rod boot

Bore	Item Stroke	AM	øC	øe	f	K	KK	h						
								1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20		20	8	35	20	6	M8 X 1.25	71	84	96	109	134	159	—
25		22	10	35	20	8	M10 X 1.25	74	87	99	112	137	162	187


Bore	Item Stroke	l							Wh						
		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20		12.5	25	37.5	50	75	100	—	51	64	76	89	114	139	—
25		12.5	25	37.5	50	75	100	125	52	65	77	90	115	140	165

Series C85


Dimensions with Mounting Brackets

Double acting: Single rod


Front foot: C85L10A, C85L16A, C85L25A

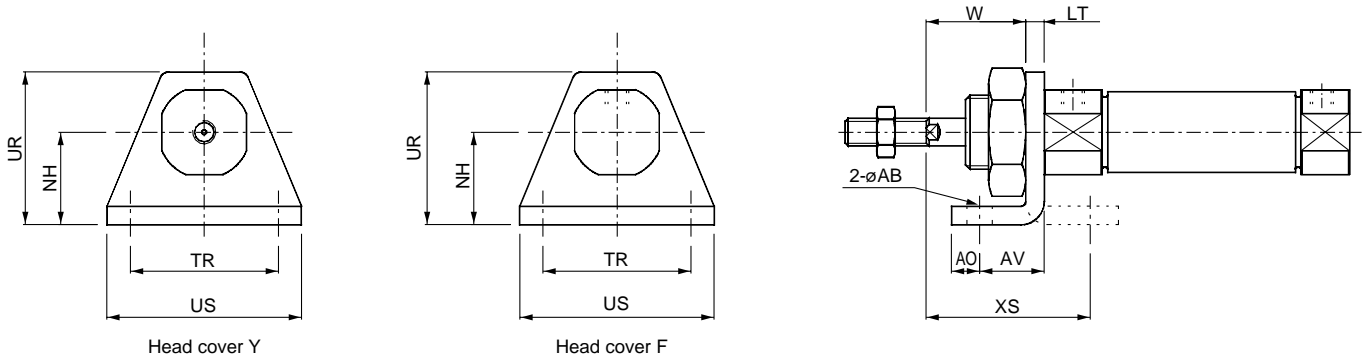

Front flange: C85F10, C85F16, C85F25

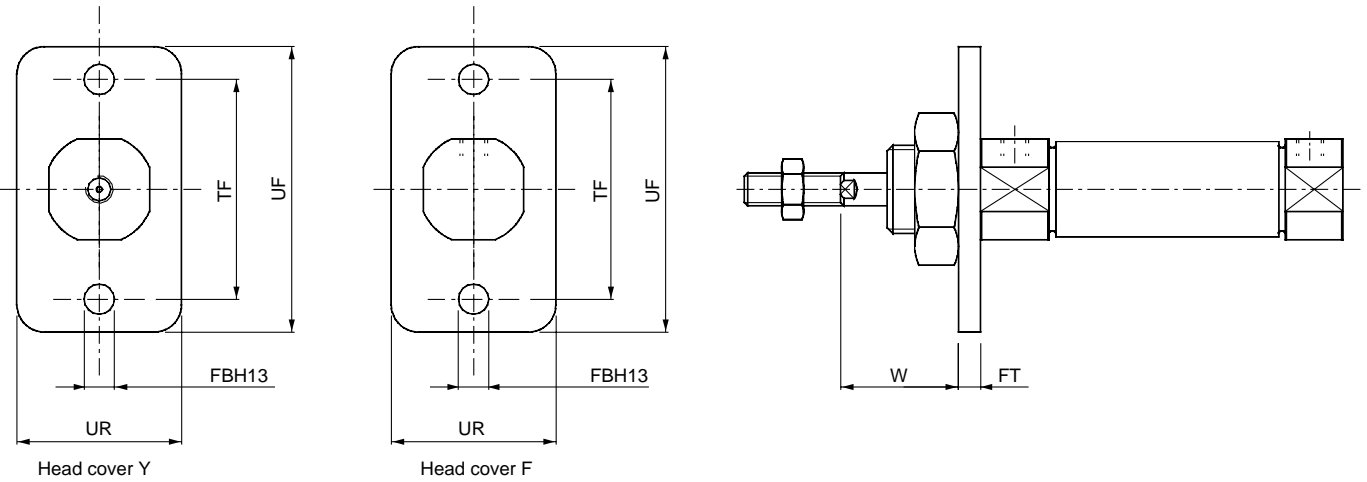


Front trunnion: C85T10, C85T16, C85T25

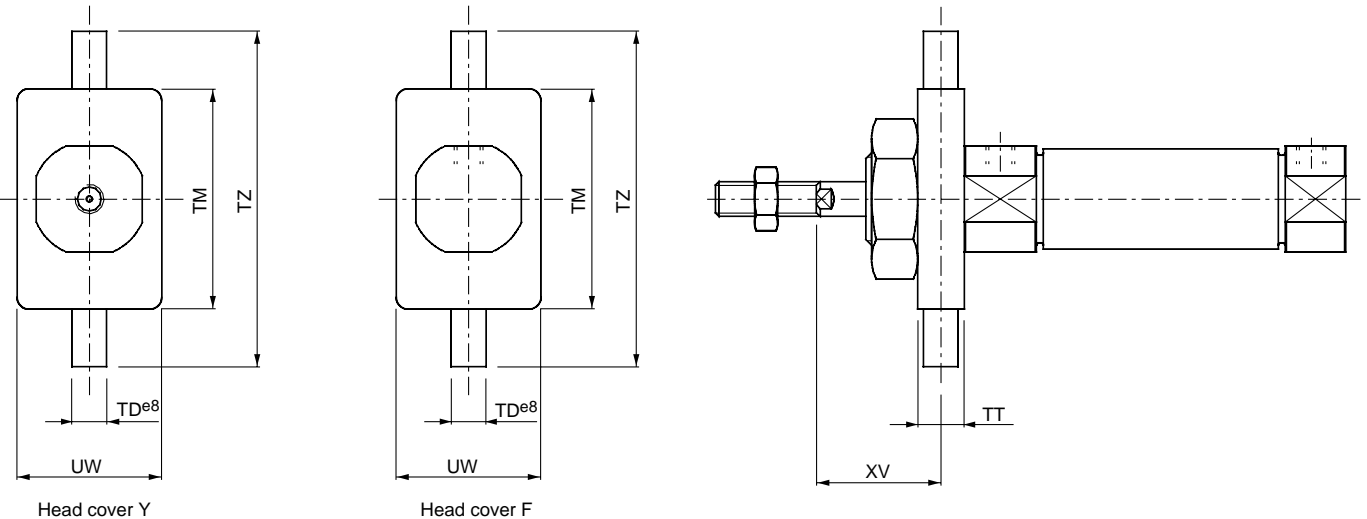

Unit: (mm)

Bore	Front foot											Front flange					Front trunnion					
	AO	US	øAB	LT	NH	TR	JS14	XS	AV	UR	W	UR	FBH13	FT	TF	UF	W	TT	UW	TD e8	TM	TZ
ø8	5	35	4.5	3.2	16	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø10	5	35	4.5	3.2	16	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø12	6	42	5.5	4	20	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø16	6	42	5.5	4	20	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø20	8	54	6.6	5	25	40	36	17	42	19	40	6.6	5	50	66	19	8	32	6	46	66	20
ø25	8	54	6.6	5	25	40	40	17	42	23	40	6.6	5	50	66	23	8	32	6	46	66	24



Bore	AM	øC	øD	F	G1	WA	WB	H	HR										
ø8	12	4	16.7	12	7	—	—	28	10										
ø10	12	4	16.7	12	7(5.5)	10.5	4.5	28	10.5										
ø12	16	6	19.7	17	8(5.5)	9.5	5.5	38	14										
ø16	16	6	19.7	17	8(5.5)	9.5	5.5	38	14										
ø20	20	8	28	20	8	13	8.5	44	1.*	(—)Tj	17 TD (28)Tj	5117 TD (1739 -1.525)Tj	(—)Tj	17 TD (28)Tj	5 (10)Tj	-0.417	-(28)		
ø25	20	10	33.5	22	8	13	10.5	50	646	TD (87.63m1.5115)Tj	5,9784,4588 64.0468	Tm Tj	1 Tc	-0.5					

Bore	Item Stroke	AM	øC	øe	f	K	KK	h						
								1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
	20	20	8	35	20	6	M8 X 1.25	71	84	96	109	134	159	—
	25	22	10	35	20	8	M10 X 1.25	74	87	99	112	137	162	187


Bore	Item Stroke	l							Wh						
		1 to 50	50 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
	20	12.5	25	37.5	50	75	100	—	51	64	76	89	114	139	—
	25	12.5	25	37.5	50	75	100	125	52	65	77	90	115	140	165

Series C85


Dimensions with Mounting Brackets

Double acting: Double rod


Front foot, Front and rear foot: C85L10^A_B, C85L16^A_B, C85L25^A_B

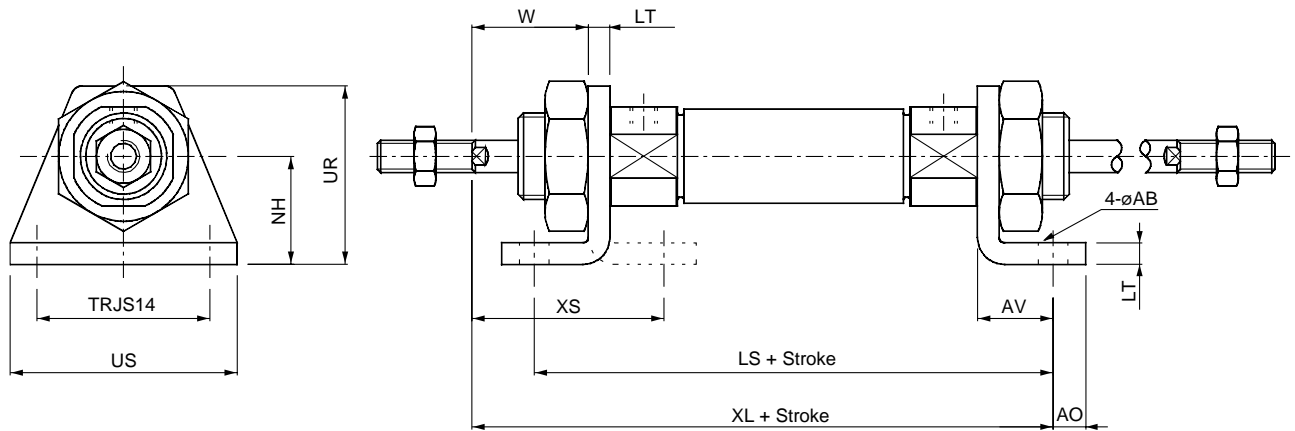

Flange: C85F10, C85F16, C85F25

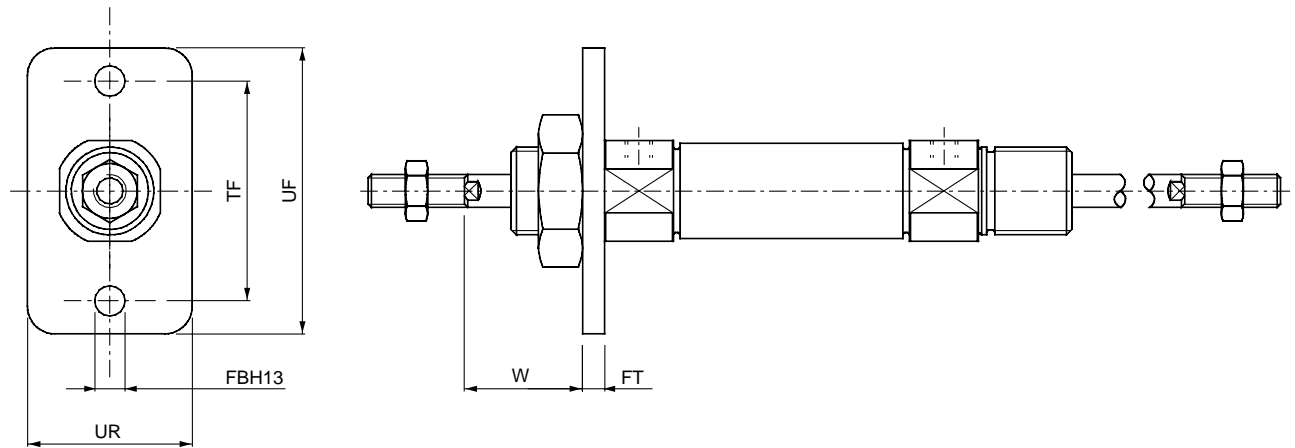

Trunnion: C85T10, C85T16, C85T25

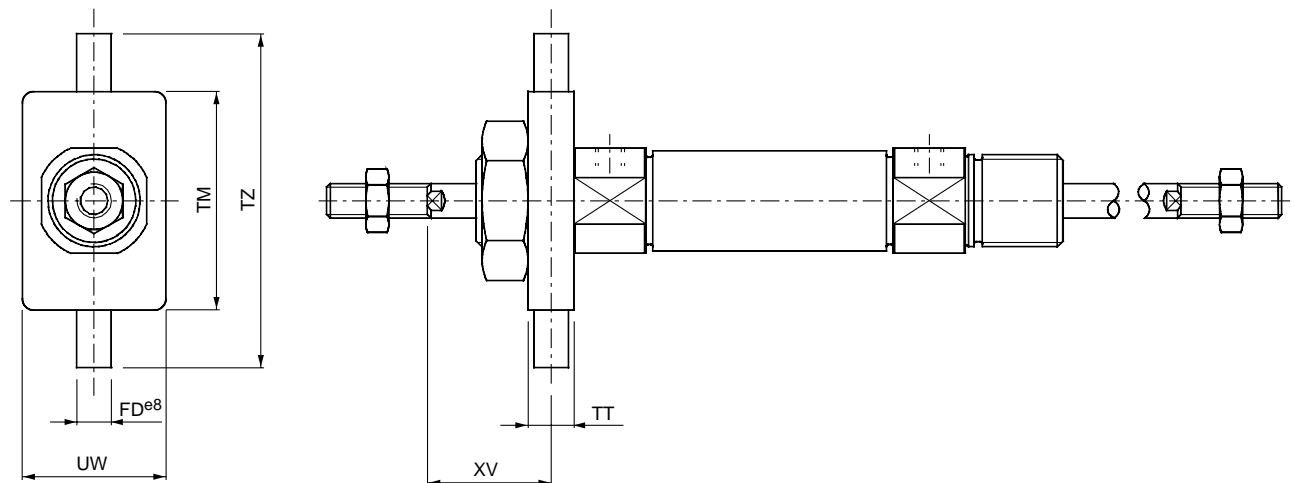

Unit: (mm)

Bore	Front foot, Front and rear foot												Flange				Trunnion							
	AO	US	øAB	LT	NH	LS	XL	TR JS14	XS	AV	UR	W	UR	FBH13	FT	TF	UF	W	TT	UW	TD ø8	TM	TZ	XV
ø8	5	35	4.5	3.2	16	70(76)	75(81)	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø10	5	35	4.5	3.2	16	70(75)	75(80)	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø12	6	42	5.5	4	20	80(82)	88(90)	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø16	6	42	5.5	4	20	80(82)	88(90)	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø20	8	54	6.6	5	25	96	103	40	36	17	42	19	40	6.6	5	50	66	19	8	32	6	46	66	20
ø25	8	54	6.6	5	25	99	110	40	40	17	42	23	40	6.6	5	50	66	23	8	32	6	46	66	24

() : In case of air cushion. { } : In case of auto switch.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1

How to Order

**Single acting
Spring return/extend**

C D 85 K N 16 50 S B

Magnet

—	None
D	Built-in magnet

Style

—	Standard
K	Non-rotating rod (only rubber bumper)

Mounting

Symbol	Mounting
N	Basic integrated clevis
E*	Double end
F	Boss cut
Y**	Boss cut - End port

* Double acting/Double rod:
Only double end style (E).

** Except for: air cushion,
single acting (T) style.

Auto switch mounting

A	Rail style
B	Band style

Auto switches and bands are shown on p.1.5-35. Please order auto switches and bands separately.

Single acting function

S	Spring return
T	Spring extend

Bore size (mm)	Standard stroke (mm)*	Max. stroke (mm)
ø8	10, 25, 50	50
ø10		
ø12		
ø16	10, 25, 50, 100, 150	150
ø20		
ø25		

* Other strokes available on request.

Mounting Bracket Parts No.

Bore (mm)	8	10	12	16	20	25
Bracket						
Foot (1 pc.)	C85L10A					
Foot (2 pcs. with mounting nut 1 pc.)	C85L10B					
Flange	C85F10					
Trunnion	C85T10					
Clevis	C85C10					
Single knuckle joint	KJ4D					
Double knuckle joint	GKM4-80252 T4floating joati.32 l 1t(Rail syD)TjSingle 0F3 18ease order kTj /F9 79l 250 7 j 0 -1 m 289.043 281.261 l S BT /F1 1 Tf 7(mm)					
Floating joint	JA10-4-070					

ISO Cylinder/Standard, Non-rotating Rod: Single Acting Spring Return/Extend **Series C85**



Spring return



Spring extend

Rubber bumper



Non-rotating rod

Specifications

Bore size (mm)	8	10	12	16	20	25
Piston rod dia. (mm)	4	4	6	6	8	10
Piston rod thread	M4 X 0.7	M4 X 0.7	M6 X 1	M6 X 1	M8 X 1.25	M10 X 1.25
Ports	M5	M5	M5	M5	G1/8	G1/8
Action	Single acting/Single rod, Spring return, Spring extend					
Fluid	Air					
Proof pressure	1.5MPa					
Max. operating pressure	1.0MPa					
Min. operating pressure	0.22MPa	0.18MPa	0.13MPa	0.13MPa	0.23MPa	0.23MPa
Ambient and fluid temperature	-20 to 80°C (Built-in magnet style: -10 to 60°C)					
Cushion	Rubber bumper (Standard)					
Lubrication	Not required. If necessary, turbine oil no.1 ISOVG32 is recommended					
Piston speed	50 to 1500mm/s					
Allowable kinetic energy	0.02J	0.03J	0.04J	0.09J	0.27J	0.4J
Non-rotating accuracy*	±1° 30'	±1° 30'	±1°	±1°	±0° 42'	±0° 42'
Stroke tolerance	0/+1				0/+1.4	

* Applicable to non-rotating models only.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95


C92

CA1


CS1

Symbol

Standard




Spring return




Spring extend

Non-rotating rod



Spring return



Spring extend

Spring Retracting Force (Standard, Non-rotating rod)

Spring Return

Unit: N


Bore (mm)	Standard stroke (mm)	Spring force									
		10		25		50		100		150	
		Retracted position	Extended position	Retracted position	Extended position	Retracted position	Extended position	Retracted position	Extended position	Retracted position	Extended position
8	10, 25, 50	4.02	4.41	3.43	4.41	2.45	4.41	—	—	—	—
10		5.69	6.28	4.90	6.28	3.53	6.28	—	—	—	—
12	10, 25, 50, 100, 150	6.57	7.16	5.79	7.16	4.41	7.16	—	—	—	—
16		12.1	13.2	10.3	13.2	7.45	13.2	7.45	13.2	7.45	13.2
20		18.6	21.6	16.7	21.6	11.8	21.6	9.81	39.2	9.81	39.2
25		25.3	27.5	22.1	27.5	16.7	27.5	13.7	47.1	15.7	47.1

Spring Extend

Unit: N

Bore (mm)	Standard stroke (mm)	Spring force									
		10		25		50		100		150	
		Retracted position	Extended position	Retracted position	Extended position	Retracted position	Extended position	Retracted position	Extended position	Retracted position	Extended position
8	10, 25, 50	5.30	3.92	5.30	3.14	5.30	2.65	—	—	—	—
10		5.98	4.81	5.98	4.02	5.98	3.53	—	—	—	—
12	10, 25, 50, 100, 150	6.57	5.59	6.57	4.90	6.57	4.51	—	—	—	—
16		14.7	11.3	14.7	9.22	14.7	7.85	14.7	7.85	14.7	7.85
20		39.2	33.0	39.2	23.5	39.2	9.81	39.2	9.81	39.2	9.81
25		47.1	40.4	47.1	30.4	47.1	13.7	47.1	13.7	47.1	15.7

Single acting: Single rod
Spring return/C□85□8 to 16-□S (Disassembly is not possible)

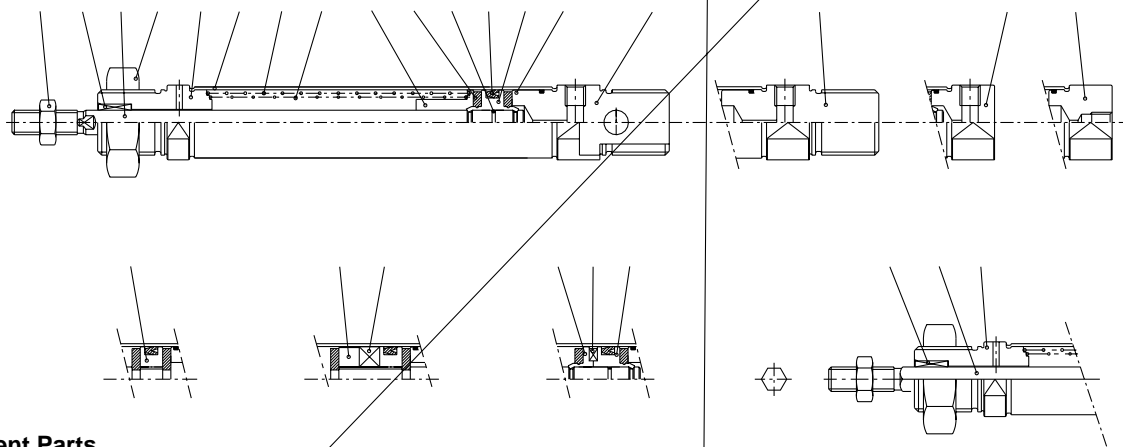


Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②A	Head cover N	Aluminum alloy	1	White anodized
②B	Head cover E	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤	Piston	Brass	1	
⑥	Piston A	Brass	1	(Switch style only)
⑦	Piston B	Brass	1	(Switch style only)
⑧	Bushing	Sintered bronze	1	

No.	Description	Material	Quantity	Remarks
⑨	Magnet		1	(Switch style only)
⑩	Bumper	Urethane	2	
⑪	Return spring A	Piano wire	1	
⑫	Return spring B	Piano wire	1	
⑬	Spring guide	Brass	1	
⑭	Spacer	Brass	1	
⑮	Piston gasket	NBR	1	
⑯	Tube gasket	NBR	1	
⑰	Piston seal	NBR	1	
⑱	Rod end nut	Carbon steel	1	Nickel plated
⑲	Mounting nut	Carbon steel	1	Nickel plated

Spring extend/C□85□8 to 16-□T (Disassembly is not possible)

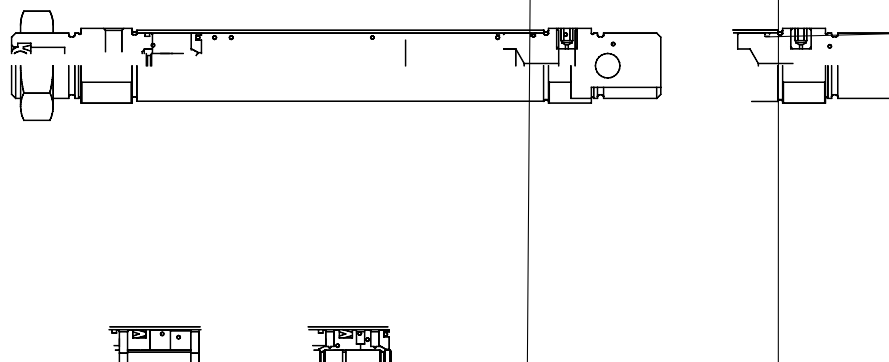


Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②A	Head cover N	Aluminum alloy	1	White anodized
②B	Head cover E	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤	Piston	Brass	1	
⑥	Piston A	Brass	1	(Switch style only)
⑦	Piston B	Brass	1	(Switch style only)
⑧	Bushing	Sintered bronze	1	
⑨	Magnet		1	(Switch style only)

No.	Description	Material	Quantity	Remarks
⑩	Bumper	Urethane	2	
⑪	Return spring C	Piano wire	1	
⑫	Spring guide	Brass	1	
⑬	Spring seat	Brass	1	
⑭	Plug	Steel	1	
⑮	Spacer	Brass	1	
⑯	Piston gasket	NBR	1	2 for switch style
⑰	Tube gasket	NBR	1	
⑱	Rod seal	NBR	1	
⑲	Piston seal	NBR	1	
⑳	Rod end nut	Carbon steel	1	Nickel plated
㉑	Mounting nut	Carbon steel	1	Nickel plated

Single acting: Single rod
Spring return/C□85□20, 25-□S

(10B) (10A)

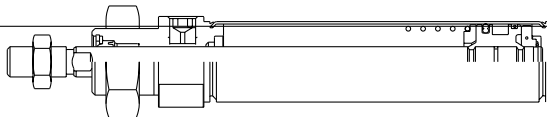

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
(2A)	Head cover N	Aluminum alloy	1	White anodized
(2B)	Head cover E	Aluminum alloy	1	White anodized
(2C)	Head cover F	Aluminum alloy	1	White anodized
(2D)	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel*	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromated
⑥	Plain washer	Carbon steel	1	Nickel plated
⑦	Bushing	Sintered bronze	1	
⑧	Bushing	Sintered bronze	1	
⑨	Retaining ring	Carbon steel	1	Nickel plated
(10A)	Return spring A	Piano wire	1	Zinc chromated

* Stainless steel (Non-rotating rod)

Spring extend/C□85□20, 25-□T

No.	Description	Material	Quantity	Remarks
(10B)	Return spring B	Piano wire	1	Zinc chromated
(11)	Spring guide	Aluminum alloy	1	
(12)	Spring holder	Aluminum alloy	1	
(13)	Set screw	Carbon steel	1	
(14)	Wear ring	Phenolic resin	1	
(15)	Bumper A	Urethane	1	
(16)	Bumper B	Urethane	1	
(17)	Piston gasket	NBR	1	
(18)	Rod seal	NBR	1	
(19)	Piston seal	NBR	1	
(20)	Rod end nut	Carbon steel	1	Nickel plated
(21)	Mounting nut	Carbon steel	1	Nickel plated
(22)	Magnet		1	(Switch style only)

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
(2A)	Head cover N	Aluminum alloy	1	White anodized
(2B)	Head cover E	Aluminum alloy	1	White anodized
(2C)	Head cover F	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel*	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromated
⑥	Plain washer	Carbon steel	1	Nickel plated
⑦	Bushing	Sintered bronze	1	
⑧	Bushing	Sintered bronze	1	
⑨	Retaining ring	Carbon steel	1	Nickel plated
(10)	Return spring	Piano wire	1	Zinc chromate

* Stainless steel (Non-rotating rod)

No.	Description	Material	Quantity	Remarks
(11)	Spring guide	Aluminum alloy	1	
(12)	Spring guide	Aluminum alloy	1	
(13)	Set screw	Carbon steel	1	
(14)	Wear ring	Phenolic resin	1	
(15)	Bumper A	Urethane	1	
(16)	Bumper B	Urethane	1	
(17)	Piston gasket	NBR	1	
(18)	Rod seal	NBR	1	
(19)	Piston seal	NBR	1	
(20)	Rod end nut	Carbon steel	1	Nickel plated
(21)	Mounting nut	Carbon steel	1	Nickel plated
(22)	Magnet		1	(Switch style only)


Series C85

Dimensions

Single acting: Spring return


C□85^N_E Bore — Stroke S — □

Without magnet, Built-in magnet

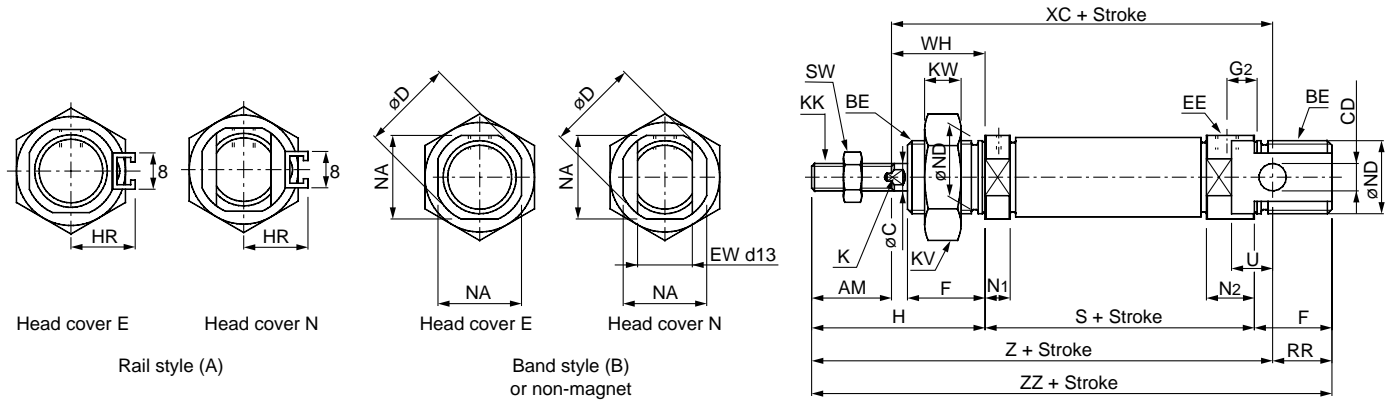

C□85KN, C□85KE

Non-rotating rod

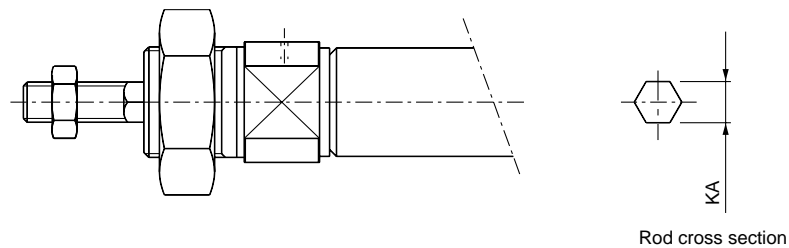

Unit: (mm)

Bore	AM	BE	øC	CD	øD	EE	EW	F	G2	H	HR	K	KA	KK	KV	KW	N1	N2	NA	øND(h8)	RR	SW	U	WH
ø8	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5 X 0.8	8	12	5	28	10	—	4.2	M4 X 0.7	19	6	5.5	9.5	15	12	10	7	6	16
ø10	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5 X 0.8	8	12	5	28	10.5	—	4.2	M4 X 0.7	19	6	5.5	9.5	15	12	10	7	6	16
ø12	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5 X 0.8	12	17	6	38	14	5	6.2	M6 X 1	24	8	5.5	10.5	18	16	14	10	9	22
ø16	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5 X 0.8	12	17	6	38	14	5	6.2	M6 X 1	24	8	5.5	10.5	18	16	13	10	9	22
ø20	20	M22 X 1.5	8	8 ^{+0.036} _{-0.006}	27.9	G1/8	16	20	8	44	17	6	8.2	M8 X 1.25	32	11	15	15	24	22	11	13	12	24
ø25	22	M22 X 1.5	10	8 ^{+0.036} _{-0.006}	33.4	G1/8	16	22	8	50	20	8	10.2	M10 X 1.25	32	11	15	15	30	22	11	17	12	28

Bore	S			XC			Z			ZZ		
	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	1 to 50
ø8	46(52){56(62)}	—	—	64(70){74(80)}	—	—	76(82){86(92)}	—	—	86(92){96(102)}	—	—
ø10	46(50){56(60)}	—	—	64(68){74(78)}	—	—	76(80){86(90)}	—	—	86(90){96(100)}	—	—
ø12	50(53.5){60(63.5)}	—	—	75(78.5){85(88.5)}	—	—	91(94.5) {101(104.5)}	—	—	105(108.5) {115(118.5)}	—	—
ø16	56(59.5){66(69.5)}	71.5(75) {92(95.5)}	87(90.5) {118(121.5)}	82(85.5) {92(95.5)}	97.5(101) {118(121.5)}	113(116.5) {144(147.5)}	98(101.5) {108(111.5)}	113.5(117) {134(137.5)}	129(132.5) {160(163.5)}	111(114.5) {121(124.5)}	126.5(130) {147(150.5)}	142(145.5) {173(176.5)}
ø20	62{87}	112	137	95{120}	145	170	115{140}	165	190	126{151}	176	201
ø25	65{88.5}	113.5	138.5	104{127.5}	152.5	177.5	126{149.5}	174.5	199.5	137{160.5}	185.5	210.5


(): In case of auto switch style. { }: In case of non-rotating rod.

ISO Cylinder/Standard, Non-rotating Rod: Single Acting Spring Return/Extend **Series C85**


Dimensions with Mounting Brackets

Single acting: Spring return


Front foot, Front and rear foot: C85L10^A_B, C85L16^A_B, C85L25^A_B

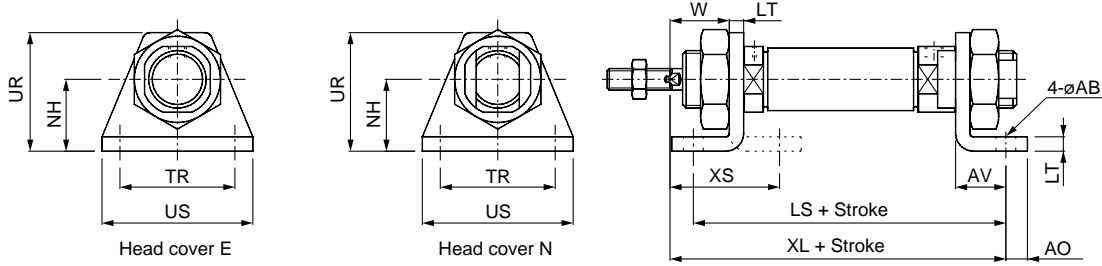


Front flange, Rear flange: C85F10, C85F16, C85F25

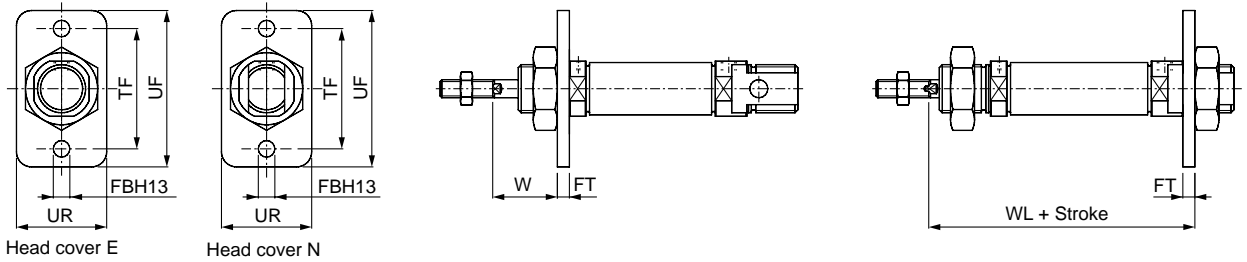

Front trunnion, Rear trunnion: C85T10, C85T16, C85T25

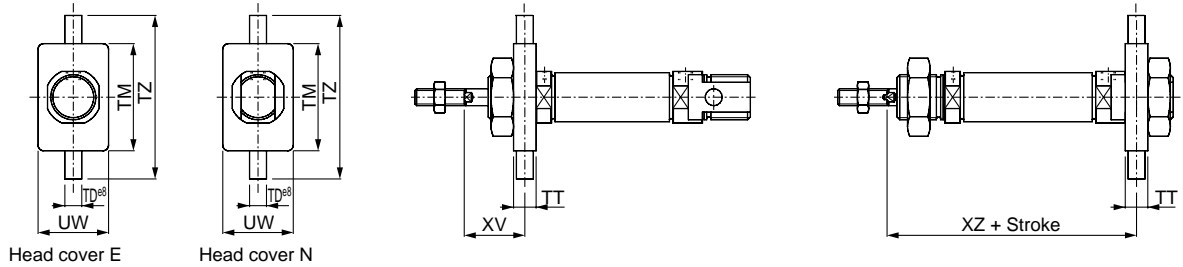

Clevis: C85C10, C85C16, C85C25

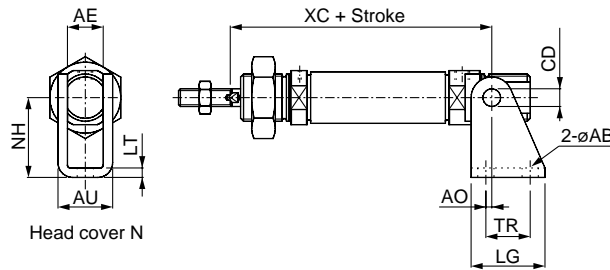

Unit: (mm)

Bore	Front foot, Front and rear foot														Front flange, Rear flange										
	AO	US	øAB	LT	NH	LS			XL			TR JS14	XS	AV	UR	W	UR	FBH13	FT	TF	UF	W	WL		
						1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150												1 to 50	51 to 100	101 to 150
ø8	5	35	4.5	3.2	16	68(74) {78(84)}	—	—	73(79) {83(89)}	—	—	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	65.2(71.2) {75.2(81.2)}	—	—
ø10	5	35	4.5	3.2	16	68(72) {78(82)}	—	—	73(77) {83(87)}	—	—	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	65.2(69.2) {75.2(79.2)}	—	—
ø12	6	42	5.5	4	20	78(81.5) {88(91.5)}	—	—	86(89.5) {96(99.5)}	—	—	32	32	14	33	18	30	5.5	4	40	52	18	76(79.5) {86(89.5)}	—	—
ø16	6	42	5.5	4	20	84(87.5) {94(97.5)}	99.5(103) {120(123.5)}	115(118.5) {148(149.5)}	92(95.5) {102(105.5)}	107.5(111) {128(131.5)}	123(126.5) {154(157.5)}	32	32	14	33	18	30	5.5	4	40	52	18	82(85.5) {92(95.5)}	97.5(101) {118(121.5)}	113(116.5) {144(147.5)}
ø20	8	54	6.6	5	25	96(121)	146	171	103(128)	153	178	40	36	17	42	19	40	6.6	5	50	66	19	91(116)	141	166
ø25	8	54	6.6	5	25	96(122.5)	147.5	172.5	110(133.5)	158.5	183.5	40	40	17	42	23	40	6.6	5	50	66	23	98(121.5)	146.5	171.5

Bore	Front trunnion, Rear trunnion										Clevis										
	TT	UW	TD ø8	TM	TZ	XV	ZX			CD	AE	øAB	AO	AU	TR	LG	NH	LT	XC		
							1 to 50	51 to 100	101 to 150										1 to 50	51 to 100	101 to 150
ø8	6	20	4	26	38	13	65(71) {75(81)}	—	—	4 ^{+0.030} ₀	8.1	4.5	1.5	13.1	12.5	20	24	2.5	64(70) {74(80)}	—	—
ø10	6	20	4	26	38	13	65(69) {75(79)}	—	—	4 ^{+0.030} ₀	8.1	4.5	1.5	13.1	12.5	20	24	2.5	64(68) {74(78)}	—	—
ø12	8	25	6	38	58	18	76(79.5) {86(89.5)}	—	—	6 ^{+0.030} ₀	12.1	5.5	2	18.5	15	25	27	3.2	75(78.5) {85(88.5)}	—	—
ø16	8	25	6	38	58	18	82(85.5) {92(95.5)}	97.5(101) {118(121.5)}	113(116.5) {144(147.5)}	6 ^{+0.030} ₀	12.1	5.5	2	18.5	15	25	27	3.2	82(88.5) {92(95.5)}	97.5(101) {118(121.5)}	113(116.5) {144(147.5)}
ø20	8	32	6	46	66	20	90(115)	140	165	8 ^{+0.036} ₀	16.1	6.6	4	24.1	20	32	30	4	95(120)	145	170
ø25	8	32	6	46	66	24	97(120.5)	145.5	170.5	8 ^{+0.036} ₀	16.1	6.6	4	24.1	20	32	30	4	104(127.5)	152.5	177.5

(): In case of auto switch style. { }: In case of non-rotating rod.

Single acting: Spring return

C□85^F Bore — Stroke S — □

Without magnet, Built-in magnet

C□85KF, C□85KY

Non-rotating rod



Unit: (mm)

Bore	AM	BE	øC	øD	EE	F	G2	H	HR	K	KA	KK	KV	KW	N1	N2	NA	øND(h8)	SW	WH
ø8	12	M12 X 1.25	4	16.7	M5 X 0.8	12	5	28	10	—	4.2	M4 X 0.7	19	6	5.5	9.5	15	12	7	16
ø10	12	M12 X 1.25	4	16.7	M5 X 0.8	12	5	28	10.5	—	4.2	M4 X 0.7	19	6	5.5	9.5	15	12	7	16
ø12	16	M16 X 1.5	6	19.7	M5 X 0.8	17	6	38	14	5	6.2	M6 X 1	24	8	5.5	10.5	18	16	10	22
ø16	16	M16 X 1.5	6	19.7	M5 X 0.8	17	6	38	14	5	6.2	M6 X 1	24	8	5.5	10.5	18	16	10	22
ø20	20	M22 X 1.5	8	27.9	G1/8	20	8	44	17	6	8.2	M8 X 1.25	32	10	15	15	24	22	13	24
ø25	22	M22 X 1.5	10	33.4	G1/8	22	8	50	20	8	10.2	M10 X 1.25	32	10	15	15	30	22	17	28

Bore	S			Z		
	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150
ø8	46(52){56(62)}	—	—	74(80){84(90)}	—	—
ø10	46(50){56(60)}	—	—	74(78){84(88)}	—	—
ø12	50(53.5){60(63.5)}	—	—	88(91.5){98(101.5)}	—	—
ø16	50(53.5){60(63.5)}	65.5(69){86(89.5)}	81(84.5){112(115.5)}	88(91.5){98(101.5)}	103.5(107){124(127.5)}	119(122.5){150(153.5)}
ø20	62{87}	112	137	106{131}	156	181
ø25	65{88.5}	113.5	138.5	115{138.5}	163.5	188.5


(): In case of auto switch style. { }: In case of non-rotating rod.

ISO Cylinder/Standard, Non-rotating Rod: Single Acting Spring Return/Extend **Series C85**


Dimensions with Mounting Brackets

Single acting: Spring return


Front foot: C85L10A, C85L16A, C85L25A

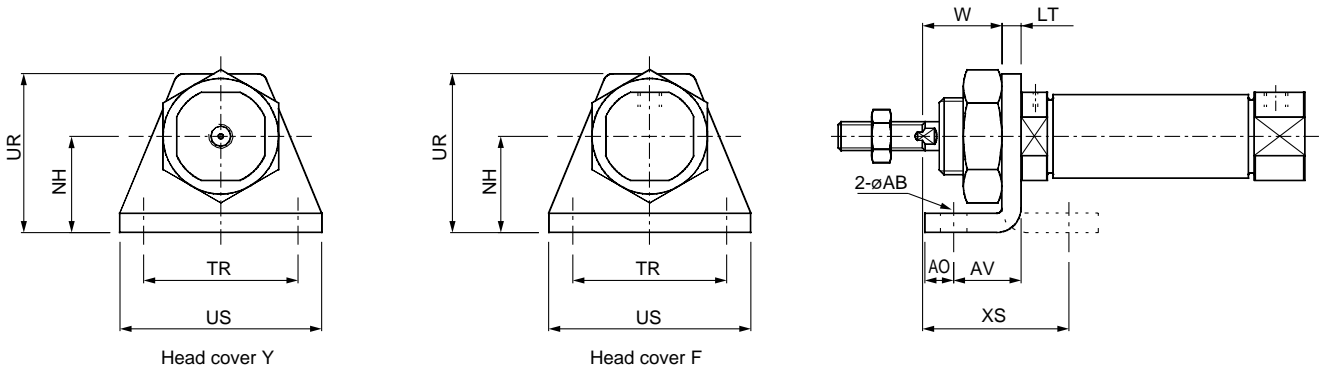

Front flange: C85F10, C85F16, C85F25

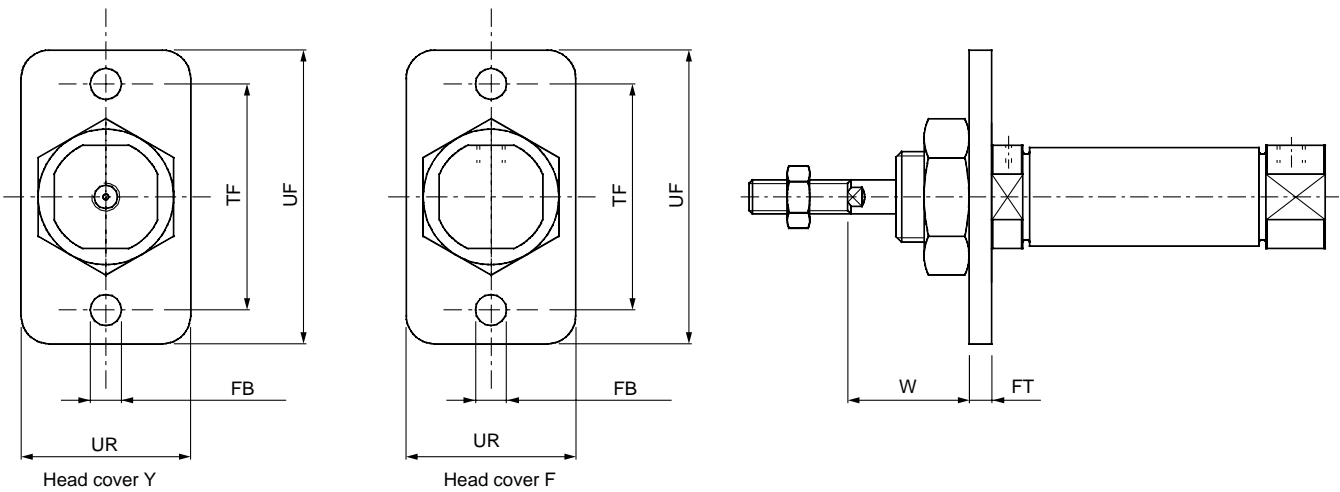

Front trunnion: C85T10, C85T16, C85T25

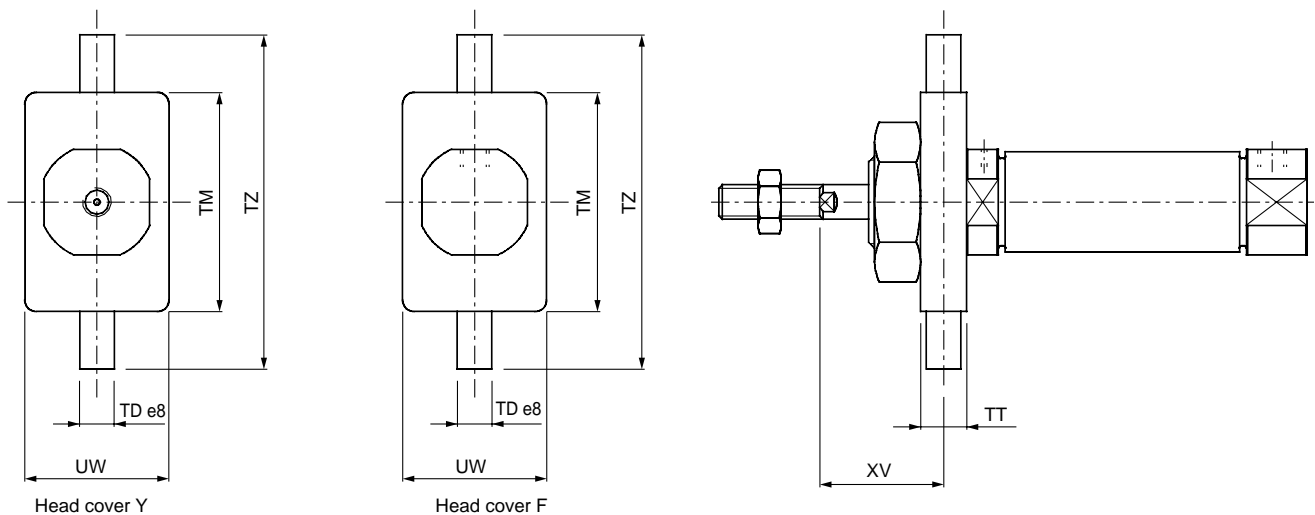

Unit: (mm)

Bore	Front foot						Front flange						Front trunnion									
	AO	US	øAB	LT	NH	TR JS14	XS	AV	UR	W	UR	FBH13	FT	TF	UF	W	TT	UW	TD e8	TM	TZ	XV
ø8	5	35	4.5	3.2	16	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø10	5	35	4.5	3.2	16	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø12	6	42	5.5	4	20	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø16	6	42	5.5	4	20	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø20	8	54	6.6	5	25	40	36	17	42	19	40	6.6	5	50	66	19	8	32	6	46	66	20
ø25	8	54	6.6	5	25	40	40	17	42	23	40	6.6	5	50	66	23	8	32	6	46	66	24

- CJ1
- CJP
- CJ2
- CM2
- C85**
- C76
- CG1
- MB
- MB1
- CP95
- C95
- C92
- CA1
- CS1


Series C85

Dimensions

Single acting: Spring extend


C□85^N_E Bore — Stroke T — □

Without magnet, Built-in magnet

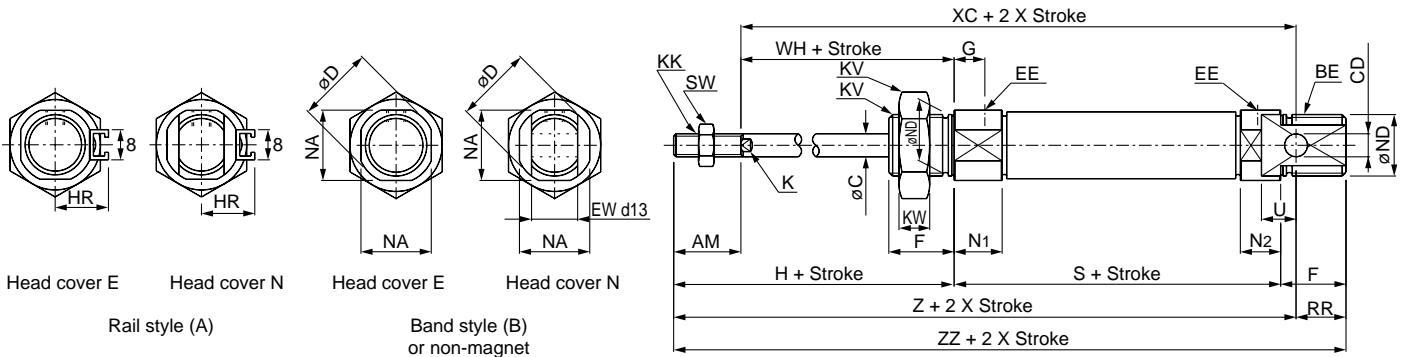

C□85KN, E

Non-rotating rod

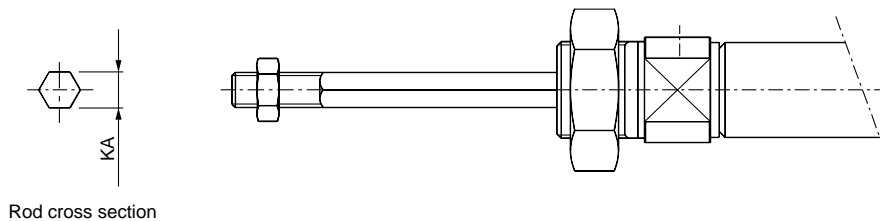

Rod cross section

Unit: (mm)

Bore	AM	BE	øC	CD	øD	EE	EW	F	G	H	HR	K	KA	KK	KV	KW	N ₁	N ₂	NA	øND(h8)	RR	SW	U	WH
ø8	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5 X 0.8	8	12	7	28	10	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	12	10	7	6	16
ø10	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5 X 0.8	8	12	7	28	10.5	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	12	10	7	6	16
ø12	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5 X 0.8	12	17	8	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	16	14	10	9	22
ø16	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5 X 0.8	12	17	8	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	16	13	10	9	22
ø20	20	M22 X 1.5	8	8 ^{+0.036} _{-0.006}	27.9	G1/8	16	20	8	44	17	6	8.2	M8 X 1.25	32	10	15	15	24	22	11	13	12	24
ø25	22	M22 X 1.5	10	8 ^{+0.036} _{-0.006}	33.4	G1/8	16	22	8	50	20	8	10.2	M10 X 1.25	32	10	15	15	30	22	11	17	12	28


Bore	S			Z			XC			ZZ		
	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150
ø8	64.5(70.5)	—	—	94.5(100.5)	—	—	82.5(88.5)	—	—	104.5(110.5)	—	—
ø10	64.5(68.5)	—	—	94.5(98.5)	—	—	82.5(86.5)	—	—	104.5(108.5)	—	—
ø12	70(73.5)	—	—	111(114.5)	—	—	95(98.5)	—	—	125(128.5)	—	—
ø16	75(78.5)	101(104.5)	127(130.5)	117(120.5)	143(146.5)	169(172.5)	101(104.5)	127(130.5)	153(156.5)	130(133.5)	156(159.5)	182(185.5)
ø20	87	112	137	140	165	190	120	145	170	151	176	201
ø25	88.5	113.5	138.5	149.5	174.5	199.5	127.5	152.5	177.5	160.5	185.5	210.5

() : In case of auto switch style.

Single acting: Spring extend


C□85N, C□85E

Front foot, Front and rear foot: C85L10^A_B, C85L16^A_B, C85L25^A_B

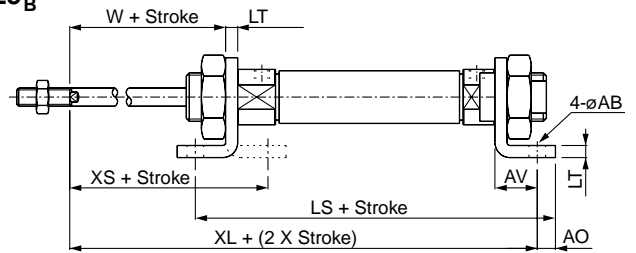

C□85N, C□85E

Front flange, Rear flange: C85F10, C85F16, C85F25

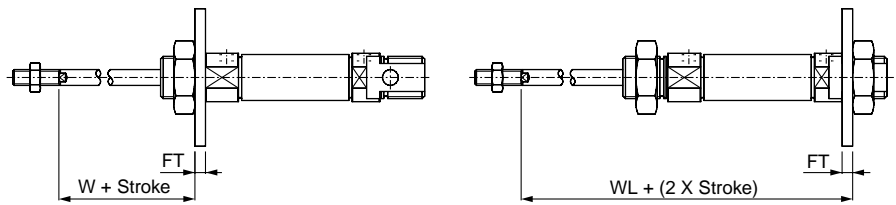

C□85N, C□85E

Front trunnion, Rear trunnion: C85T10, C85T16, C85T25



C□85N

Clevis: C85C10, C85C16, C85C25

Unit: (mm)

Bore	Front foot, Front and rear foot															Front flange, Rear flange									
	AO	US	øAB	LT	NH	LS			XL			TR JS14	XS	AV	UR	W	UR	FBH13	FT	TF	UF	W	WL		
						1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150												1 to 50	51 to 100	101 to 150
ø8	5	35	4.5	3.2	16	86.5(92.5)	—	—	91.5(97.5)	—	—	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	83.7(89.7)	—	—
ø10	5	35	4.5	3.2	16	86.5(90.5)	—	—	91.5(95.5)	—	—	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	83.7(87.7)	—	—
ø12	6	42	5.5	4	20	98(101.5)	—	—	106(109.5)	—	—	32	32	14	33	18	30	5.5	4	40	52	18	96(99.5)	—	—
ø16	6	42	5.5	4	20	103(106.5)	129(132.5)	155(158.5)	111(114.5)	137(140.5)	163(166.5)	32	32	14	33	18	30	5.5	4	40	52	18	101(104.5)	127(130.5)	153(156.5)
ø20	8	54	6.6	5	25	121	146	171	128	153	178	40	36	17	42	19	40	6.6	5	50	66	19	116	141	166
ø25	8	54	6.6	5	25	122.5	147.5	172.5	133.5	158.5	183.5	40	40	17	42	23	40	6.6	5	50	66	23	121.5	146.5	171.5

Bore	Front trunnion, Rear trunnion							Clevis													
	TT	UW	TD e8	TM	TZ	XV	ZX			CD	AE	øAB	AO	AU	TR	LG	NH	LT	XC		
							1 to 50	51 to 100	101 to 150										1 to 50	51 to 100	101 to 150
ø8	6	20	4	26	38	13	83.5(89.5)	—	—	4 ^{+0.030} ₀	8.1	4.5	1.5	13.1	12.5	20	24	2.5	82.5(88.5)	—	—
ø10	6	20	4	26	38	13	83.5(87.5)	—	—	4 ^{+0.030} ₀	8.1	4.5	1.5	13.1	12.5	20	24	2.5	82.5(86.5)	—	—
ø12	8	25	6	38	58	18	96(99.5)	—	—	6 ^{+0.030} ₀	12.1	5.5	2	18.5	15	25	27	3.2	95(98.5)	—	—
ø16	8	25	6	38	58	18	101(104.5)	127(130.5)	153(156.5)	6 ^{+0.030} ₀	12.1	5.5	2	18.5	15	25	27	3.2	101(104.5)	127(130.5)	153(156.5)
ø20	8	32	6	46	66	20	115	140	165	8 ^{+0.036} ₀	16.1	6.6	4	24.1	20	32	30	4	120	145	170
ø25	8	32	6	46	66	24	120.5	145.5	170.5	8 ^{+0.036} ₀	16.1	6.6	4	24.1	20	32	30	4	127.5	152.5	177.5

() : In case of auto switch style.


Series C85

Dimensions

Single acting: Spring extend


C□85F Bore Stroke T □

Without magnet, Built-in magnet

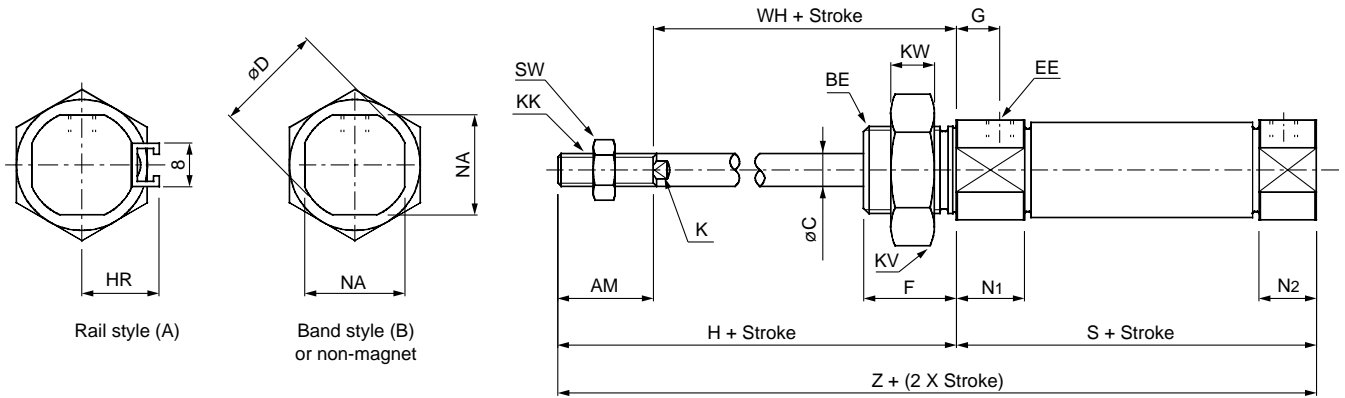

C85KF, CD85KF

Non-rotating rod

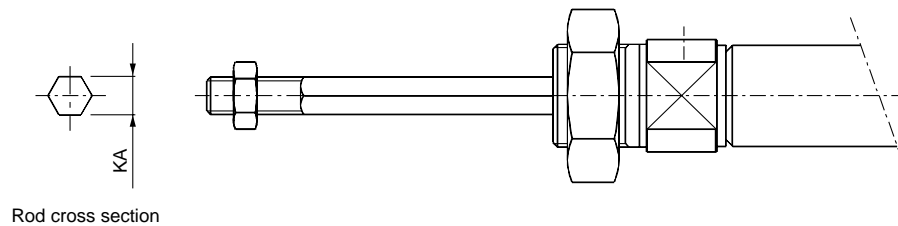

Rod cross section

Unit: (mm)


Bore	AM	BE	øC	øD	EE	F	G	H	HR	K	KA	KK	KV	KW	N1	N2	NA	SW	WH
ø8	12	M12 X 1.25	4	16.7	M5 X 0.8	12	7	28	10	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	7	16
ø10	12	M12 X 1.25	4	16.7	M5 X 0.8	12	7	28	10.5	—	4.2	M4 X 0.7	19	6	11.5	9.5	15	7	16
ø12	16	M16 X 1.5	6	19.7	M5 X 0.8	17	8	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	10	22
ø16	16	M16 X 1.5	6	19.7	M5 X 0.8	17	8	38	14	5	6.2	M6 X 1	24	8	12.5	10.5	18	10	22
ø20	20	M22 X 1.5	8	27.9	G1/8	20	8	44	17	6	8.2	M8 X 1.25	32	10	15	15	24	13	24
ø25	20	M22 X 1.5	10	33.4	G1/8	22	8	50	20	8	10.2	M10 X 1.25	32	10	15	15	30	17	28

Bore	S			Z		
	1 to 50	51 to 100	101 to 150	1 to 50	51 to 100	101 to 150
ø8	64.5(70.5)	—	—	92.5(98.5)	—	—
ø10	64.5(68.5)	—	—	92.5(96.5)	—	—
ø12	70(73.5)	—	—	108(111.5)	—	—
ø16	69(72.5)	95(98.5)	121(124.5)	107(110.5)	133(136.5)	159(162.5)
ø20	87	112	137	131	156	181
ø25	88.5	113.5	138.5	138.5	163.5	188.5


() : In case of auto switch style.

Single acting: Spring extend

Front foot: C85L10A, C85L16A, C85L25A

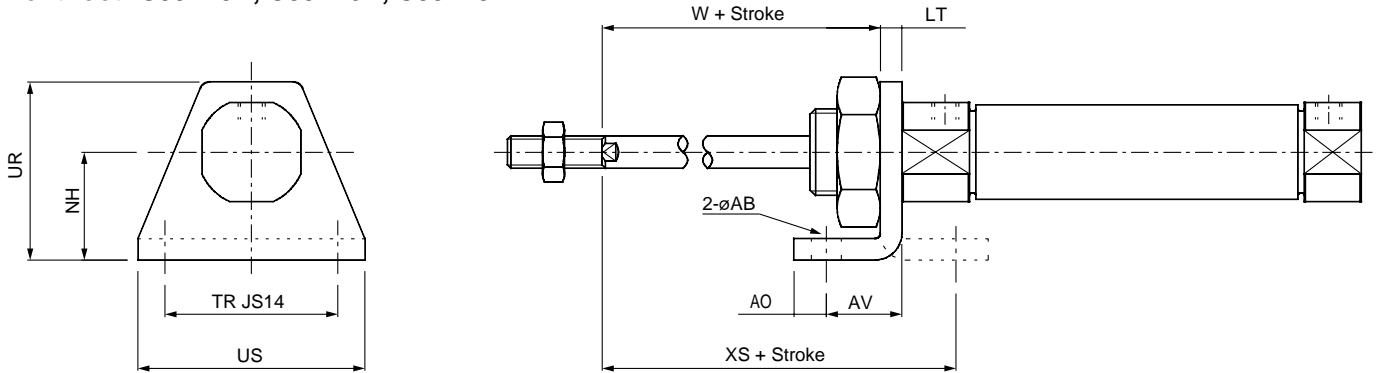

Front flange: C85F10, C85F16, C85F25

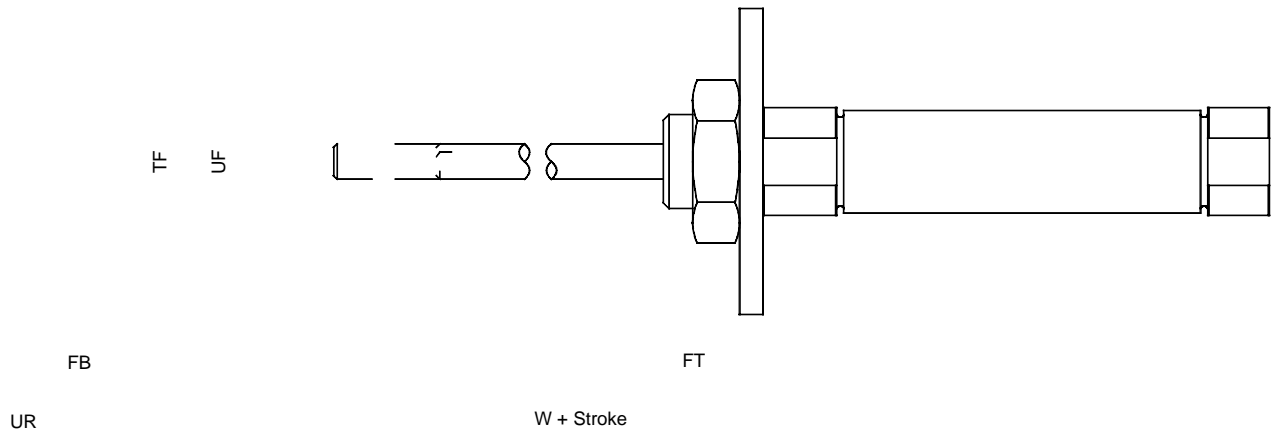

Front trunnion: C85T10, C85T16, C85T25



Unit: (mm)

Bore	Front foot						Front flange						Front trunnion									
	AO	US	øAB	LT	NH	TR JS14	XS	AV	UR	W	UR	FBH13	FT	TF	UF	W	TT	UW	TD e8	TM	TZ	XV
ø8	5	35	4.5	3.2	16	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø10	5	35	4.5	3.2	16	25	23.8	11	26	12.8	22	4.5	3.2	30	40	12.8	6	20	4	26	38	13
ø12	6	42	5.5	4	20	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø16	6	42	5.5	4	20	32	32	14	33	18	30	5.5	4	40	52	18	8	25	6	38	58	18
ø20	8	54	6.6	5	25	40	36	17	42	19	40	6.6	5	50	66	19	8	32	6	46	66	20
ø25	8	54	6.6	5	25	40	40	17	42	23	40	6.6	5	50	66	23	8	32	6	46	66	24

Series C85

High Temperature

XB6

C85 **Mounting** **Bore size** **Stroke** — XB6
 N, E, F, Y 8, 10, 12, 16, 20, 25mm

Standard cylinder seals are replaced with special ones and other modifications are made in order to enable the cylinder to operate at a high ambient temperature (−10 to +150°C).

Possible applications:

- Bore size 8 + 0 and 25mm
- Rubber bumper
- Without magnets (Auto switches cannot be used at high temperature.)
- Single rod - Double acting
- Double rod - Double acting (W)

Dimensions unchanged

Specifications

Style	Air cylinder
Applicable sizes	ø8, ø10, ø12, ø16, ø20, ø25mm
Action	Double acting
Ambient temperature range	−10 to 150°C
Cushion	Rubber bumper
Material	Seal: Fluorocarbon rubber Wear ring: Fluorocarbon resin
Grease	Fluoroplastics grease

Low Temperature

XB7

C85 **Mounting** **Bore size** **Stroke** — XB7
 N, E, F, Y 20, 25mm

Standard cylinder seals are replaced with special ones and other modifications are made in order to enable the cylinder to operate at a low ambient temperature (−40 to +70°C).

Possible applications:

- Bore size 20 and 25mm
- Rubber bumper
- Without magnets (Auto switches cannot be used at low temperature.)
- Single rod - Double acting
- Double rod - Double acting (W)

Dimensions unchanged

Specifications

Style	Air cylinder
Applicable sizes	ø20, ø25mm
Action	Double acting
Ambient temperature range	−40 to 70°C
Cushion	Rubber bumper
Material	Seal: Low nitrile rubber Wear ring: Fluorocarbon resin
Grease	Fluoroplastics grease

Low Speed

XB9

C85 **Mounting** **Bore size** **Stroke** **XB9**
 N, E, F, Y 20, 25mm

The cylinder does not generate any stick-slip phenomenon even at the rated low speed of 10 to 50mm/sec. All strokes smoothly drive at a constant speed.

Possible applications:

- Bore size 20 and 25mm
- Rubber bumper style only
- With or without magnets
- Single rod - Double acting

Dimensions unchanged

Specifications

Style	Air cylinder
Applicable sizes	ø20, ø25mm
Action	Double acting
Piston speed	10 to 50mm/sec
Cushion	Rubber bumper

Heavy-duty Scraper

XC4

C85 **Mounting** **Bore size** **Stroke** **XC4**
 N, E, F, Y 20, 25mm

A heavy-duty scraper is used as wiper ring. Ideal for severe applications where the cylinder is exposed to dust, earth and sand. Applicable to casting machines, construction machines, industrial vehicles, etc..

Possible applications:


- Bore size 20 and 25mm
- Rubber bumper style only
- With or without magnets
- Single rod - Double acting
- Double rod - Double acting (W)

Dimensions unchanged

Specifications


Style	Air cylinder
Applicable sizes	ø20, ø25mm
Max. operating pressure	1MPa
Min. operating pressure	0.08MPa
Cushion	Rubber bumper
Wiper ring	NBR (SCB)

Construction

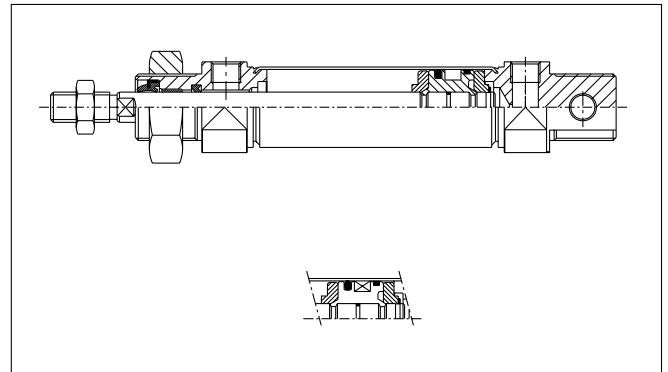
CJ1
CJP
CJ2
CM2
C85
C76
CG1
MB
MB1
CP95
C95
C92
CA1
CS1



Magnet •

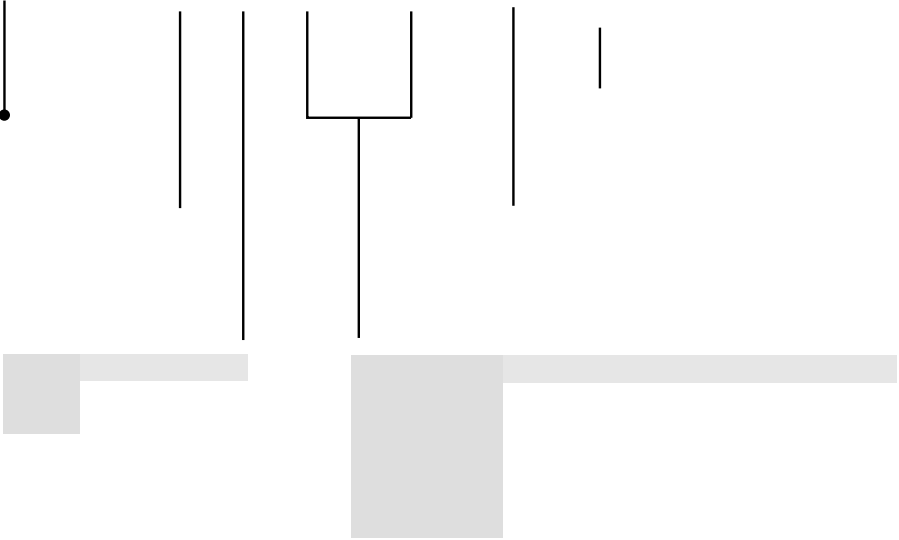

ISO Cylinder/Direct Mount: Double Acting **Series C85**


Square rod cover makes direct contact mounting possible

Space saving


Mounting accuracy and rigidity made possible by means of faucet joint and direct mounting.

Front face mounting style and base mounting available to suit your applications.

Bottom side mounting

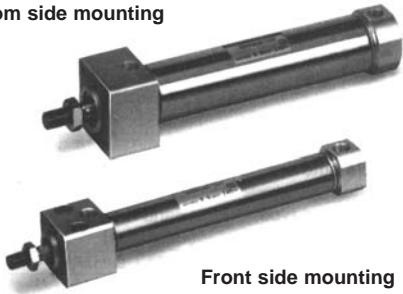

Front side mounting

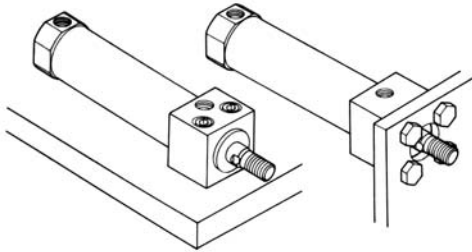


Bottom side mounting

Front side mounting

Symbol

Double Acting/Single Rod



Specifications

Bore size (mm)	8	10	12	16	20	25
Piston rod dia. (mm)	4	4	6	6	8	10
Piston rod thread	M4 X 0.7	M4 X 0.7	M6 X 1	M6 X 1	M8 X 1.25	M10 X 1.25
Ports	M5	M5	M5	M5	G1/8	G1/8
Action	Double acting/Single Rod					
Fluid	Air					
Proof pressure	1.5MPa					
Max operating pressure	1.0MPa					
Min operating pressure	0.1MPa	0.08MPa		0.05MPa		
Ambient and fluid temperature	-20 to 80°C (Built-in magnet style: -10 to 60°C)					
Cushion	Rubber bumper (Standard)					
Lubrication	Not required. If necessary, turbine oil no.1 ISOVG32 is recommended					
Piston speed	50 to 1500mm/s					
Allowable kinetic energy	0.02J	0.03J	0.04J	0.09J	0.27J	0.4J
Stroke tolerance	0/+1				0/+1.4	

Weight

Bore size (mm)		8	10	12	16	20	25
Basic weight	Bottom side mounting	43	46	84	95	167	253
	Front side mounting	—	—	—	—	163	230
Additional weight for each 10mm of stroke		2	2.2	4.1	5.1	7.8	12.2

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95


C95

C92

CA1

CS1

Double acting: Single rod
C□85RA8 to 16 (Disassembly is not possible)

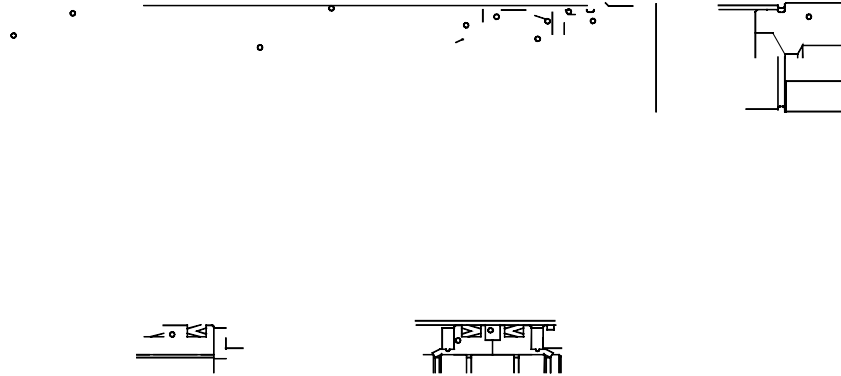

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston "A"	Brass	1	
⑤B	Piston "B"	Brass	2	(Switch style piston)

No.	Description	Material	Quantity	Remarks
⑥	Bushing	Sintered bronze	1	
⑦	Magnet		1	(Switch style only)
⑧	Bumper	Urethane	2	
⑨	Piston gasket	NBR	1	(2 for switch style)
⑩	Tube gasket	NBR	2	
⑪	Rod seal	NBR	1	
⑫	Piston seal	NBR	2	

C□85R 20, 25

Component Parts


No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromated
⑥	Plain washer	Carbon steel	1	Nickel plated
⑦	Bushing	Sintered bronze	1	
⑧	Retaining ring	Carbon steel	1	Nickel plated

No.	Description	Material	Quantity	Remarks
⑨	Retaining ring	Carbon steel	1	
⑩	Wear ring	Phenolic resin	1	
⑪	Bumper A	Urethane	1	
⑫	Bumper B	Urethane	1	
⑬	Piston gasket	NBR	1	
⑭	Rod seal	NBR	1	
⑮	Piston seal	NBR	1	
⑯	Rod end nut	Carbon steel	1	Nickel plated
⑰	Magnet		1	(Switch style only)

Double acting: Single rod

Bottom side mounting/C□85RA F_Y 8 to 16—Stroke B

Without magnet, Built-in magnet (Band style)


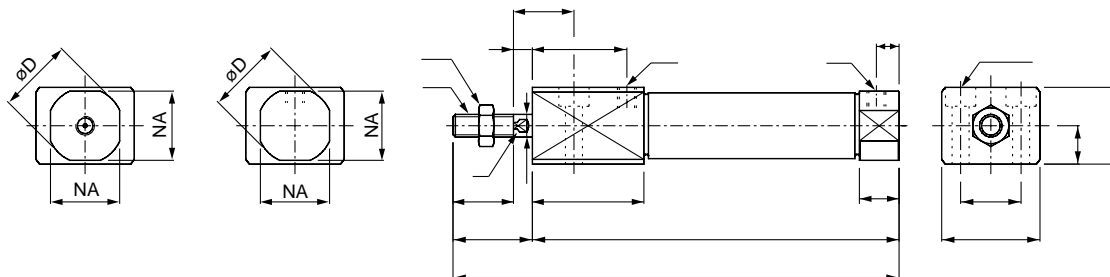


Unit: (mm)

Bore	AM	B	øC	øD	EE	G1	G2	H	K	KK	L	øLD	LH	LX	N1	N2	NA	S	SW	WH	XB	ZZ
ø8	12	16	4	16.7	M5 X 0.8	19	5	16	—	M4 X 0.7	23	ø3.5, ø6.5 Depth of counter bore 4	8	14	23.5	9.5	15	58	7	4	12	74
ø10	12	16	4	16.7	M5 X 0.8	19	5	16	—	M4 X 0.7	23	ø3.5, ø6.5 Depth of counter bore 4	8	14	23.5	9.5	15	58	7	4	12	74
ø12	16	20	6	19.7	M5 X 0.8	25	6	21	5	M6 X 1	26	ø4.5, ø8 Depth of counter bore 5	10	16	29.5	10.5	18	67	10	5	16	88
ø16	16	20	6	19.7	M5 X 0.8	25	6	21	5	M6 X 1	26	ø4.5, ø8 Depth of counter bore 5	10	16	29.5	10.5	18	67	10	5	16	88

Rod Accessories

Single Knuckle Joint/DIN648-DIN24335



Unit: (mm)

Bore	Model	Thread d3	dh7	h	d6	b3	b1	l	d7	α°	l3
ø8	KJ4D	M4	5	27	18	6.0	8	10	11	7.5	10
ø10	KJ4D	M4	5	27	18	6.0	8	10	11	7.5	10
ø12	KJ6D	M6	6	30	20	6.75	9	12	13	6.5	10
ø16	KJ6D	M6	6	30	20	6.75	9	12	13	6.5	10
ø20	KJ8D	M8	8	36	24	9	12	16	16	13	12
ø25	KJ10D	M10 X 1.25	10	43	28	10.5	14	20	19	13	14

Unit: (mm)

Floating Joint/Series JA

In case of dimension without C

Unit: (mm)

Bore	Model	M		A	B	C	D	E	F	G	H	Maximum screwed depth P	Allowable eccentricity U	Max. operating tension and compression power (KN)
		Nominal thread dia.	Pitch											
ø8, ø10	JA10-4-070	4	0.7	26	9	10	12	1.5	4	4	7	5.5	0.5	0.054
ø12, ø16	JA10-6-100	6	1	34.5	12.5	14	16	2	6	5	10	7	0.5	0.123
ø20	JA20-8-125	8	1.25	44	17.5	—	21	4.5	7	7	13	8	0.5	1.1
ø25	JA30-10-125	10	1.25	49.5	19.5	—	24	5	8	8	17	9	0.5	2.5

Applicable Auto Switches/Refer to p.5.3-2 for further details.

Style	Special function	Electrical entry	Indicator	Wiring (output)	Load voltage		Auto switch model**			Lead wire* (mm)				Applicable load		
					DC	AC	Band mounting	Rail mounting		0.5 (-)	3 (L)	5 (Z)	None (N)			
								Perpendicular	In-line							
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	—	C76	—	A76H	●	●	—	—	IC	Relay PLC
				—	—	200V	—	A72	A72H	●	●	—	—			
				2 wire	24V	12V	100V	C73	A73	A73H	●	●	●	—		
		5V,12V	≤100V	C80		A80	A80H	●	●	—	—	IC				
		12V	—	C73C		A73C	—	●	●	●	●	—	IC			
		Connector	Yes	2 wire	5V,12V	≤24V	C80C	A80C	—	●	●	●	●	—	IC	
—	—	—		A79W	—	●	●	—	—	—						
Diagnostic indicator (2 colour)	Grommet	Yes		—	—	—	A79W	—	●	●	—	—	—			
Solid state switch	—	Grommet	Yes	3 wire (NPN)	5V,12V	—	H7A1	F7NV	F79	●	●	○	—	IC	Relay PLC	
				3 wire (PNP)		—	H7A2	F7PV	F7P	●	●	○	—			
		Connector	2 wire	12V	—	H7B	F7BV	J79	●	●	○	—				
		—		—	H7C	J79C	—	●	●	●	●	—				
	Diagnostic indicator (2 colour)	Grommet	Yes	3 wire (NPN)	5V,12V	—	H7NW	F7NVV	F79W	●	●	○	—	IC		
				3 wire (PNP)			H7PW	—	F7PW	●	●	○	—			
	Water resistant (2 colour)	Grommet	Yes	2 wire	12V	—	H7BW	H7BWW	J79W	●	●	○	—	—		
							—	—	F7BA	—	F7BA	—	●	○		—
	With timer	Grommet	Yes	3 wire (NPN)	5V,12V	—	—	—	F7NT	—	●	○	—	IC		
							—	—	H7NF	—	F79F	●	●	○		—
	With diagnostic output (2 colour)	Grommet	Yes	4 wire (NPN)	—	—	—	—	F7LF	—	●	●	○	—		—
							—	—	H7LF	—	F7LF	●	●	○		—

* Lead wire length 0.5m..... e.g.) C73C 5m.....Z e.g.) C73CZ
3m.....L C73CL None.....N C73CN

* Solid state switches marked with "○" are manufactured upon receipt of order.

** "D-A79W" cannot be mounted on bore size ø10 cylinder with air cushion.

Auto Switch Mounting Band Part No.

Auto switch models D-C7, D-H7	Bore size					
	ø8	ø10	ø12	ø16	ø20	ø25
	BJ2-008	BJ2-010	BJ2-012	BJ2-016	BM2-020	BM2-025

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1

