

TLE9012AQU

Li-Ion Battery Monitoring and Balancing IC




RoHS



ISO26262
ready

Features

- General
 - Monitors up to 12 cells connected in series
 - Supports communication of up to 20 devices
 - Supports hot plugging
- Voltage measurement
 - 16 bit high resolution ADC measurement for each cell
 - High accuracy measurement for SoC (State-of-Charge) and SoH (State-of-Health) calculation
 - Temperature compensated measurements
 - Built-in noise filtering
 - Selectable measurement bit length
- Temperature measurement
 - 5 temperature measurement channels for connection to external NTC
 - Internal temperature measurement
- Balancing
 - Integrated balancing switch allowing up to 150 mA balancing current
- Communication Bus (iso UART)
 - Differential robust serial interface for communication between battery blocks
 - High speed communication with 2 Mbps
 - Power balanced communication scheme
- Additional 4 GPIO pins to e.g. connect an external EEPROM
- Green product (RoHS-compliant)
- ISO-26262 ready, supporting ASIL-C BMS safety applications¹⁾

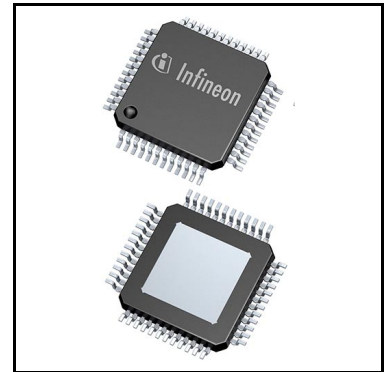

Safety features

- Two independent internal voltage references
- Block voltage measurement based on different ADCs
- Configurable analog OV/UV comparators
- End-to-end CRC secured communication
- CRC secured configuration registers
- Internal open load detection

1) according to ISO 26262-8 clause 13 first edition

- Emergency mode signaling using iso UART lines

Potential applications

- Multi-cell battery monitoring and balancing system IC designed for Li-Ion battery packs used in hybrid electric vehicles (HEV), plug-in hybrid electric vehicles (PHEV), battery electric vehicles (BEV) as well as in 12 V Lithium-Ion batteries

Product validation

Qualified for automotive applications. Product validation according to AEC-Q100.

Description

The TLE9012AQU provides the main function of monitoring the temperature of the battery and voltage of each cell as well as the communication to the host controller.

Type	Package	Marking
TLE9012AQU	PG-TQFP-48	TLE9012AQU

Block diagram

1 Block diagram

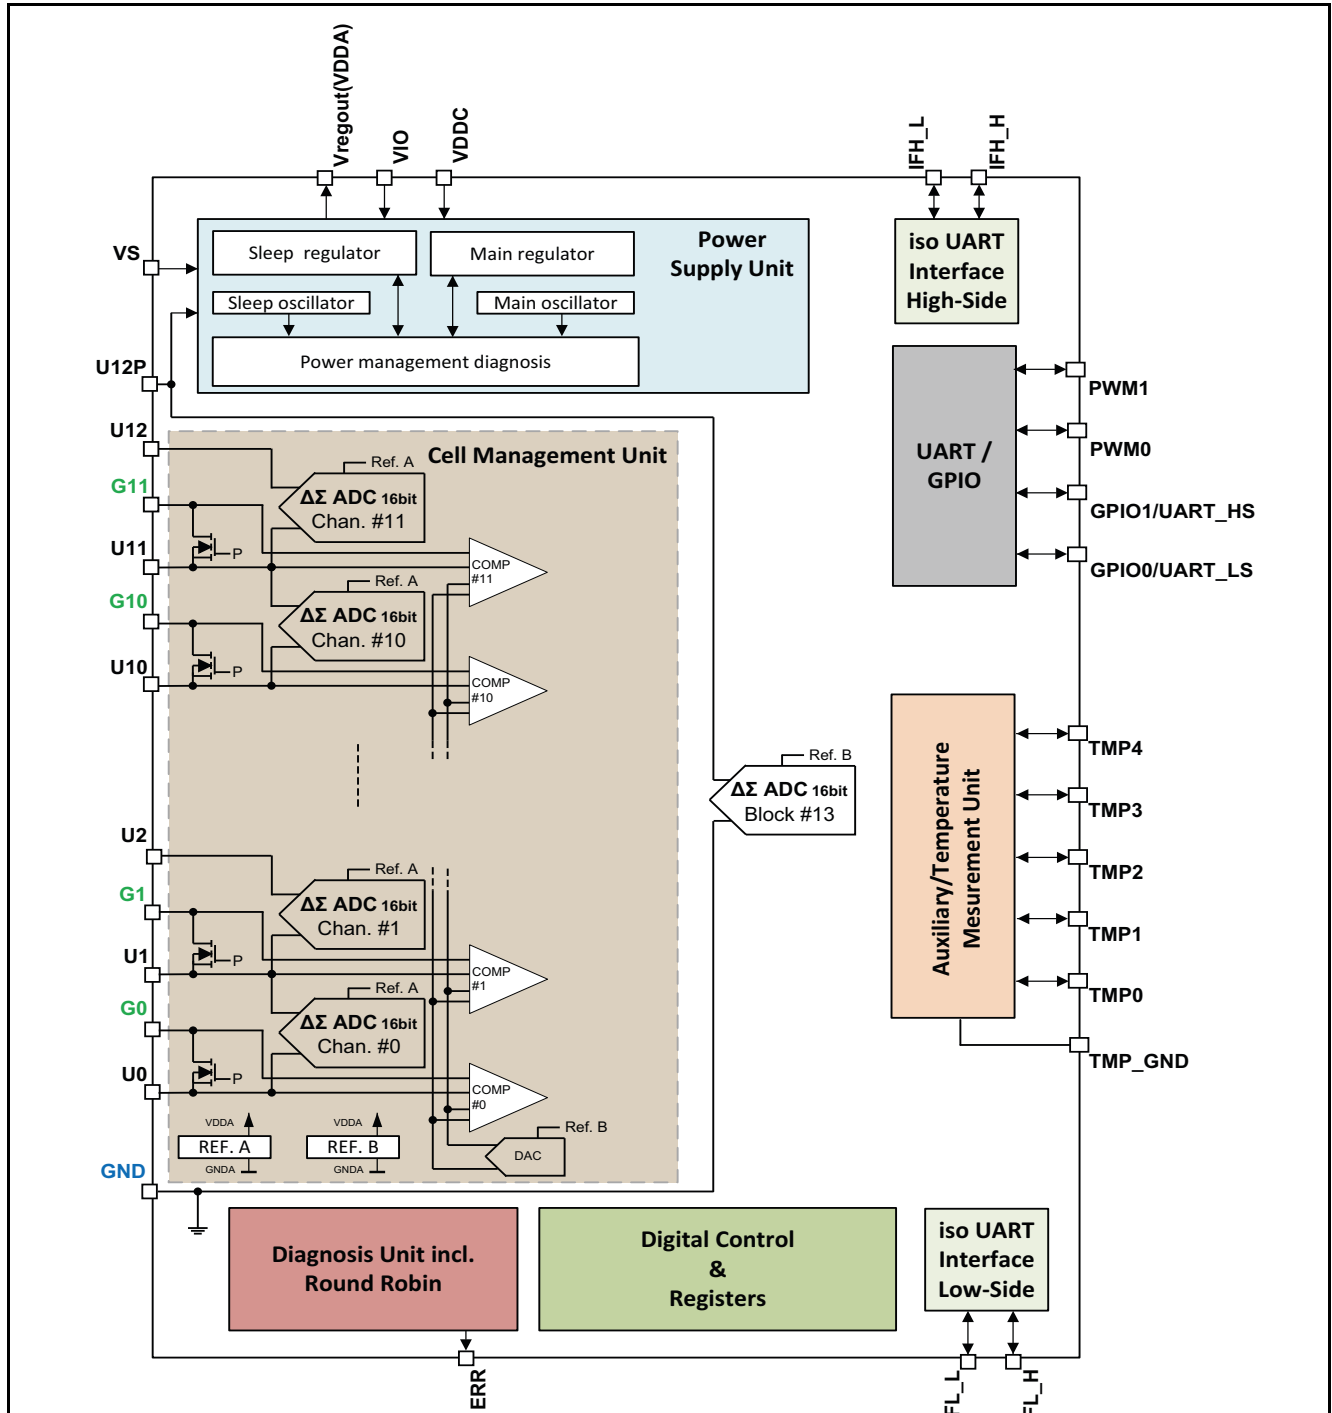


Figure 1 TLE9012AQU block diagram

Pin configuration

2 Pin configuration

2.1 Pin assignment

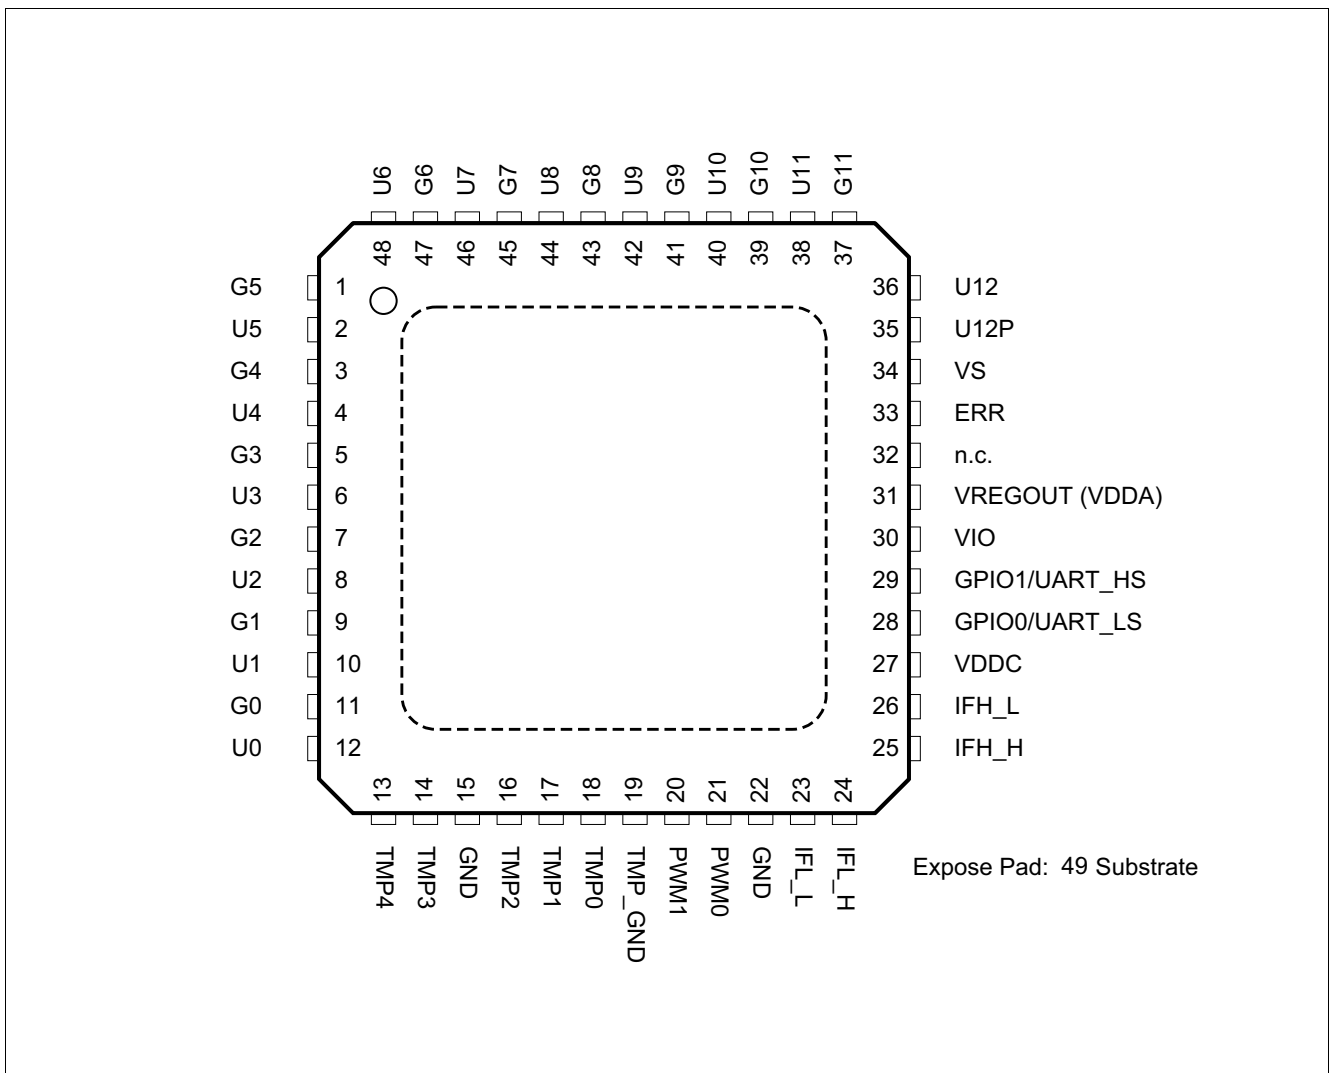


Figure 2 Pin configuration

3 Package outlines

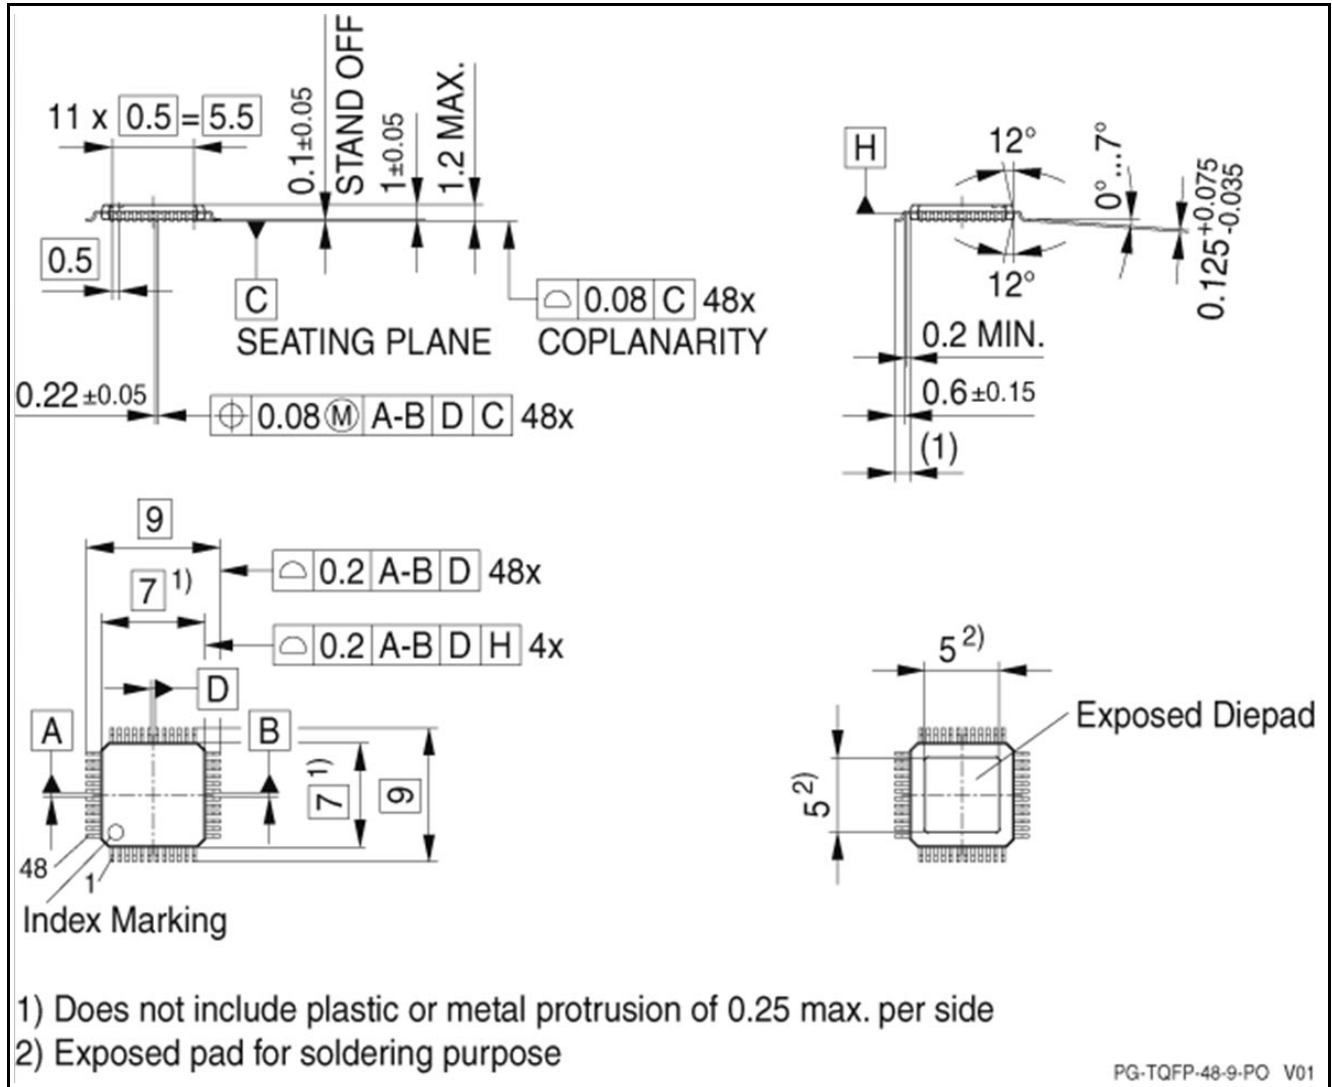


Figure 3 Package outlines and footprint PG-TQFP-48

Green product (RoHS-compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2020-05-20

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2020 Infineon Technologies AG.

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.