



RoHS  
Compliant

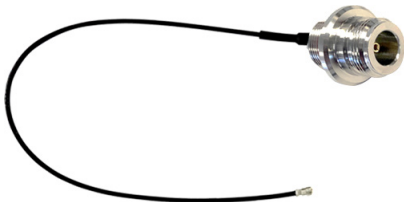

## Specification

Impedance	: 50Ω
Frequency Range	: DC to 6GHz
Maximum Working Voltage	: 60Vrms
Dielectric Withstand Voltage (max.)	: 200Vrms
Insulator Resistance	: 500MΩ min.

## Diagram

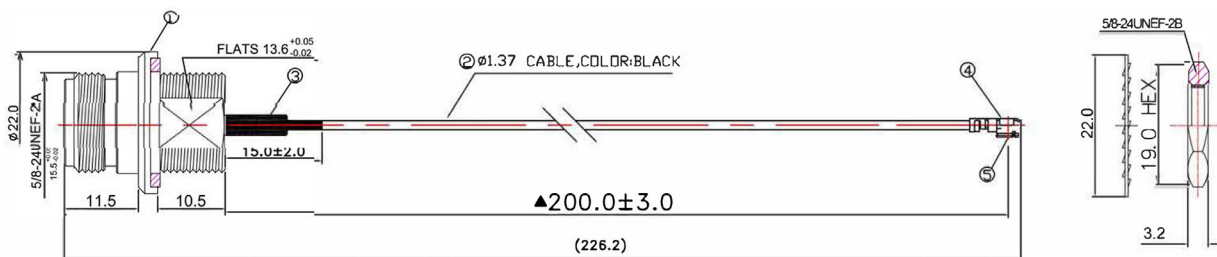

Dimensions : Millimetres

Item	QTY	U/M	Description
1	1	EA	N Straight Bulkhead Jack for OD1 .37mm Cable
2	1	EA	OD1 .37mm Cable Colour:Black
3	1	EA	F32 OD 2.5mm Heat shrink tube colour:Black
4	1	EA	U.FL-LP-088 Halogen Free Shell For OD1 .37mm Cable
5	1	EA	U.FL-LP-088 Contact for OD1 .37mm Cable

## Part Number Table

Description	Part Number
RF Cable Assembly, Rear Lock N Type B/H Jack to UFL R/A Plug, Black, 200mm	MP005987

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro