

# PrintDry™ Filament Dryer PRO for 3D Printing



The effective solution for moisture-related 3D printing problems, such as:


- filament crackling, popping & clogging
- weak printed model
- poor surface quality
- print failing

Good for:

- drying filament before printing
- feeding & drying filament during printing
- regenerated desiccant pouches

Features:

- good for spools with  $\phi$ 4-8" (max 200mm), < 4.5 lbs (1 kg)
- dryer temperature: 95-165°F (35-75°C)
- continuous drying time: up to 48 hours
- Double-wall structure
- Built-in temperature sensor
- used for both 1.75mm or 3mm filaments




## Ultimate Filament Storage Solution



to Keep Filament Dry

## PrintDry™ Vacuum-sealed Filament Container for 3D Printing

Max Spool Size:  $\phi$ 8"x 3.3"

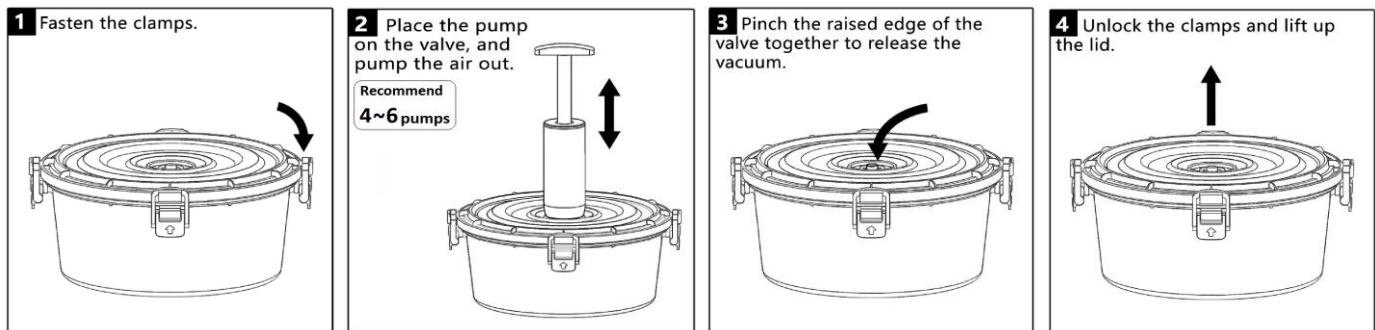

PrintDry Reseller:

PrintDry filament dryers/containers have been used for drying & storing filaments for 10000+ users in 50+ countries. Please visit [www.printdry.com](http://www.printdry.com) for more information.