TE Internal #: BKA199N0059020000 Standard Circular Connectors, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PBT GF, 23 Shell Size

View on TE.com >

TE

Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Cable-to-Cable

Sealable: No

Circuit Application: Power & Signal

Connector Mounting Type: Cable Mount (Free-Hanging)

Shell Plating Material: Electrodeposited Nickel

Features

Product Type Features

Product Type	Connector	
Connector System	Cable-to-Cable	
Sealable	No	
Shell Type	Metal	
Electrical Characteristics		
Operating Voltage	630 VAC	
Body Features		
Environmental Protection	IP67	
Shell Plating Material	Electrodeposited Nickel	
Shell Base Material	Zinc Alloy	
Circular Connector Insulation Material Type	PBT GF	
Mechanical Attachment		
Mating Retention Type	Speedtec (Triple Start Threaded)	
Connector Mounting Type	Cable Mount (Free-Hanging)	

C For support call+1 800 522 6752

Standard Circular Connectors, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PBT GF, 23 Shell Size



Housing Features

Circular Connector Shell Size	23
Alignment Keyed	0°
Dimensions	
Cable Diameter Range	14 – 17 mm[.55 – .67 in]
Usage Conditions	
Operating Temperature Range	-20 – 130 °C[-4 – 266 °F]
Operation/Application	
Durability Rating	500 Cycles
Circuit Application	Power & Signal
Shielded	Yes
Industry Standards	
UL Flammability Rating	UL 94V-0
Approved Standards	UL

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Not Yet Reviewed	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUN 2020 (209) SVHC > Threshold: Pb (3.5% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Not Yet Reviewed for halogen content	
Solder Process Capability	Not reviewed for solder process capability	
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and r based on the information they provided. This information is subject to change. EU RoHS compliant have a maximum concentration of 0.1% by weight in homo chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmiu limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished elec	The part numbers that TE has identified as ogenous materials for lead, hexavalent m, or qualify for an exemption to these	

will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

Standard Circular Connectors, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PBT GF, 23 Shell Size




numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

TE Part # BSA078N00590235000 923 PLUG	TE Part # C0-0236-000-000 DIGITAL CRIMPING TOOL, MID SIZE	TE Part # C0-0201-000-000 CRIMPING TOOL MID-SIZE	TE Part # C0-0009-000-000 POSITIONING INSERT FOR 2 MM CONTACTS
TE Part # C0-0004-000-000 POSITIONING INSERT FOR 2 MM CONTACTS	TE Part # C0-0252-000-000 POSITIONING INSERT FOR 1 MM CONTACTS		

Customers Also Bought

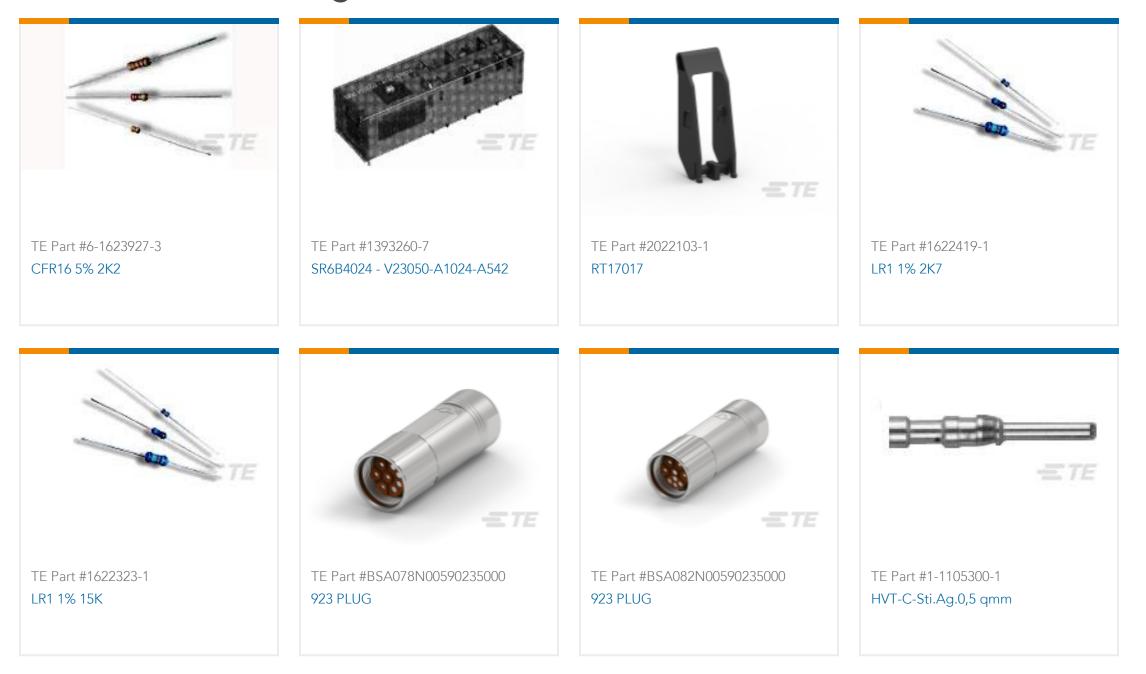

Standard Circular Connectors, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PBT GF, 23 Shell Size





Documents

Product Drawings 923 EXTENSION, SPEEDTEC-READY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_BKA199N00590200000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_BKA199N00590200000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_BKA199N00590200000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages BKA199N00590200000

English

Instruction Sheets Instruction Sheet (non U.S.)

English