3-2366515-2 - ACTIVE

Dynamic Series | Dynamic 1000 Series

TE Internal #: 3-2366515-2 Dynamic 1000 Series, Housing, Receptacle, Wire-to-Wire, 12 Position, 2mm [.079in] Centerline, Crimp, 4 Row, Row-to-Row Spacing .079 in [2 mm]

View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Wire Number of Positions: 12

Centerline (Pitch): 2 mm [.079 in]

Features

Product Type Features

Connector Product Type	Housing			
Connector & Housing Type	Receptacle			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	12			
Number of Rows	4			
Contact Features				
Contact Current Rating (Max)	6.5 A			
Termination Features				
Termination Method to Wire & Cable	Crimp			
Mechanical Attachment				

C For support call+1 800 522 6752

Dynamic 1000 Series, Housing, Receptacle, Wire-to-Wire, 12 Position, 2mm [.079in] Centerline, Crimp, 4 Row, Row-to-Row Spacing .079 in [2 mm]



Connector Mounting Type	Cable Mount (Free-Hanging)				
Housing Features					
Centerline (Pitch)	2 mm[.079 in]				
Housing Color	Black				
Dimensions					
Row-to-Row Spacing	2 mm[.079 in]				
Usage Conditions					
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]				
Operation/Application					
Circuit Application	Power & Signal				
Product Compliance For compliance documentation, visit the product page on TE.com>					
EU RoHS Directive 2011/65/EU	Compliant				
EU ELV Directive 2000/53/EC	Compliant				
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold				
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211)				

(211)
Candidate List Declared Against: JAN 2021
(211)
Does not contain REACH SVHC
Not Low Halogen - contains Br or Cl > 900

ppm.

Not reviewed for solder process capability

Halogen Content

Solder Process Capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Dynamic 1000 Series, Housing, Receptacle, Wire-to-Wire, 12 Position, 2mm [.079in] Centerline, Crimp, 4 Row, Row-to-Row Spacing .079 in [2 mm]



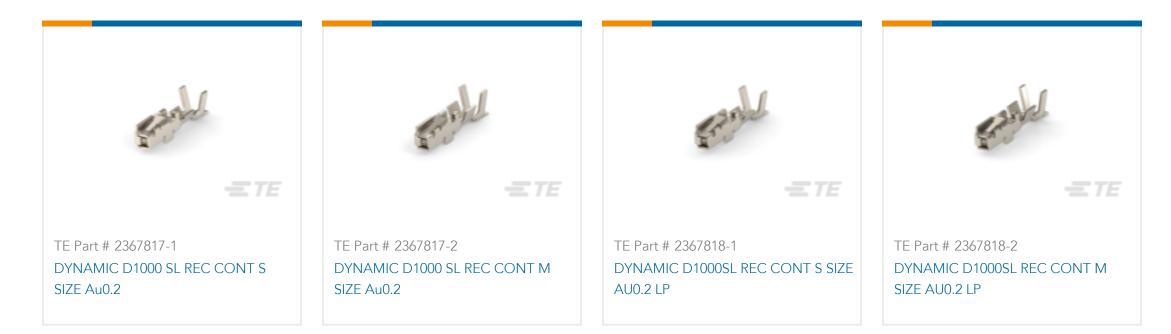




Also in the Series | Dynamic 1000 Series



Connector Contacts(1)	Insertion & Extraction Tools(2)	PCB Connector Keying(1)	PCB Connector Mounting(2)
			A A A A A A A A A A A A A A A A A A A
Rectangular Connector Housings(2)	Standard Rectangular Connectors(1)	Wire-to-Board Connector Assemblies & Housings(165)	Wire-to-Board Connector Contacts(37)




Customers Also Bought

L For support call+1 800 522 6752

Dynamic 1000 Series, Housing, Receptacle, Wire-to-Wire, 12 Position, 2mm [.079in] Centerline, Crimp, 4 Row, Row-to-Row Spacing .079 in [2 mm]



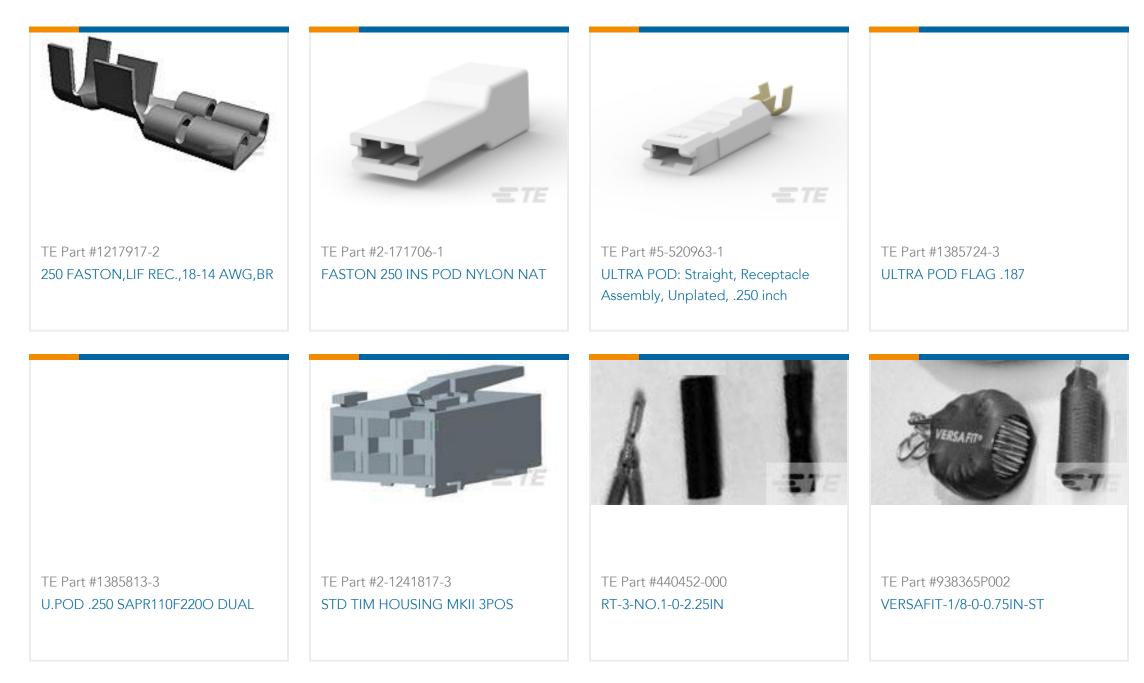



TE Part #2-1123722-3 3.96 EP PLUG HSG 3P(YELLOW)

Documents

Product Drawings DYNAMIC D1000 SLIM REC HSG 12P X KEY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-2366515-2_1.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_3-2366515-2_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-2366515-2_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

Dynamic 1000 Series, Housing, Receptacle, Wire-to-Wire, 12 Position, 2mm [.079in] Centerline, Crimp, 4 Row, Row-to-Row Spacing .079 in [2 mm]



DYNAMIC D1000 SLIM WIRE-TO-WIRE CONNECTOR

English

Product Specifications

Product Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English