# EL8123-000 - ACTIVE

#### **ZHD-CT**

TE Internal #: EL8123-000 ZHD-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade View on TE.com >



Identification & Labeling > Printable Tubing > ZHD-CT LFH & FLUID RESISTANT TUBE



### Printable Tubing Type: Continuous

Printable Tubing Grade: Fluid Resistant & Low Fire Hazard

Printable Tubing Shrink Ratio: 2:1

Primary Product Color: Yellow

Supplied Inner Diameter: 6.4 mm [.25 in ]

#### All ZHD-CT LFH & FLUID RESISTANT TUBE (18)

#### Features

#### **Product Type Features**

Printable Tubing Type

Printable Tubing Grade

Continuous

Fluid Resistant & Low Fire Hazard

#### **Body Features**

Printable Tubing Shrink Ratio	2:1
Primary Product Color	Yellow
Dimensions	
Supplied Inner Diameter	6.4 mm[.25 in]
Recovered Inside Diameter	3.2 mm[.125 in]
Compatible Cable Diameter Range	3.8 – 5.4 mm[.15 – .215 in]
Usage Conditions	
Operating Temperature Range	-55 – 135 °C[-67 – 275 °F]
Operation/Application	
Recommended Ribbon	See TE Document 411-121005 the Printer Product Ribbon Matrix
Printer/Label Features	
Recommended Printer	See TE Document 411-121005 the Printer Product Ribbon Matrix

### EL8123-000

ZHD-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade



Printer Technology	Thermal Transfer
Packaging Features	
Packaging Quantity	50
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 202 (211) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capabili

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




# EL8123-000

ZHD-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade







# Also in the Series ZHD-CT

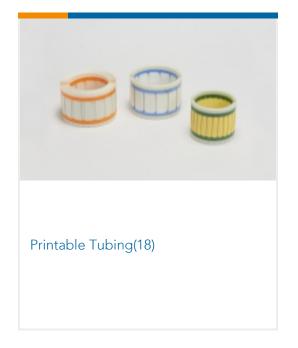

# Customers Also Bought

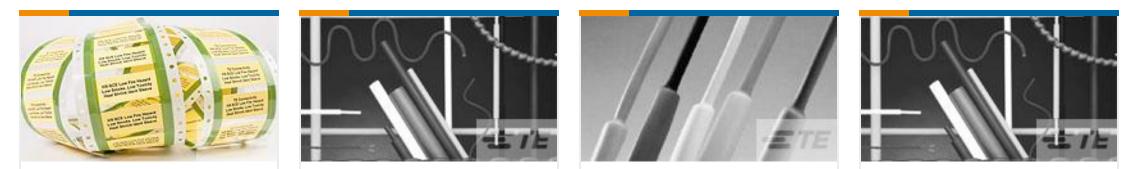

	Part #6787634001 TE Part #5038814001   100-3/8-0-SP DCPT-10/5-45-SP
--	---

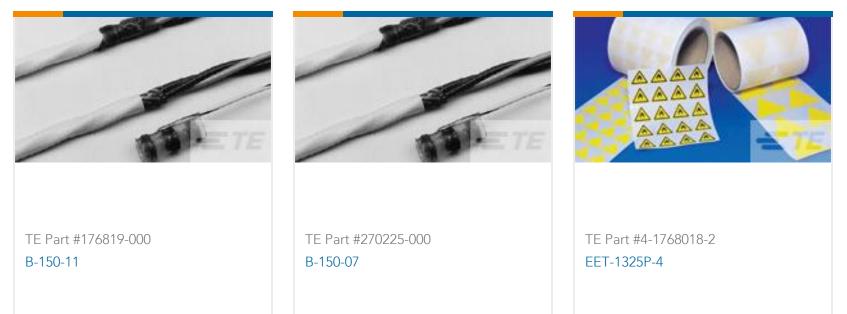

# Documents

Product Drawings ZHD-CT-50M-6.4-OUT-4

English

Datasheets & Catalog Pages ZHD-CT, Continuous Zero Low Fire Hazard, Diesel Resistant Heat Shrink Identification Tube

English

### EL8123-000

ZHD-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade



Product Specifications Product Specification

English

Instruction Sheets Instruction Sheet (non U.S.)

English