EXTERNAL DESKTOP POWER SUPPLY 24VDC 120WATT

POWERPAX: SW3479-VI

Features:

- Universal Input
- IEC-320-C14 Input Connector
- 3 Year Warranty
- Efficiency Level VI
- Safety approved to: UL,CUL,FCC,GS,CE,RCM

Description:

Our Range of 120watt AC/DC switch mode power supplies provide 120 watts of continuous output power in a high quality compact enclosure suitable for many general power applications.

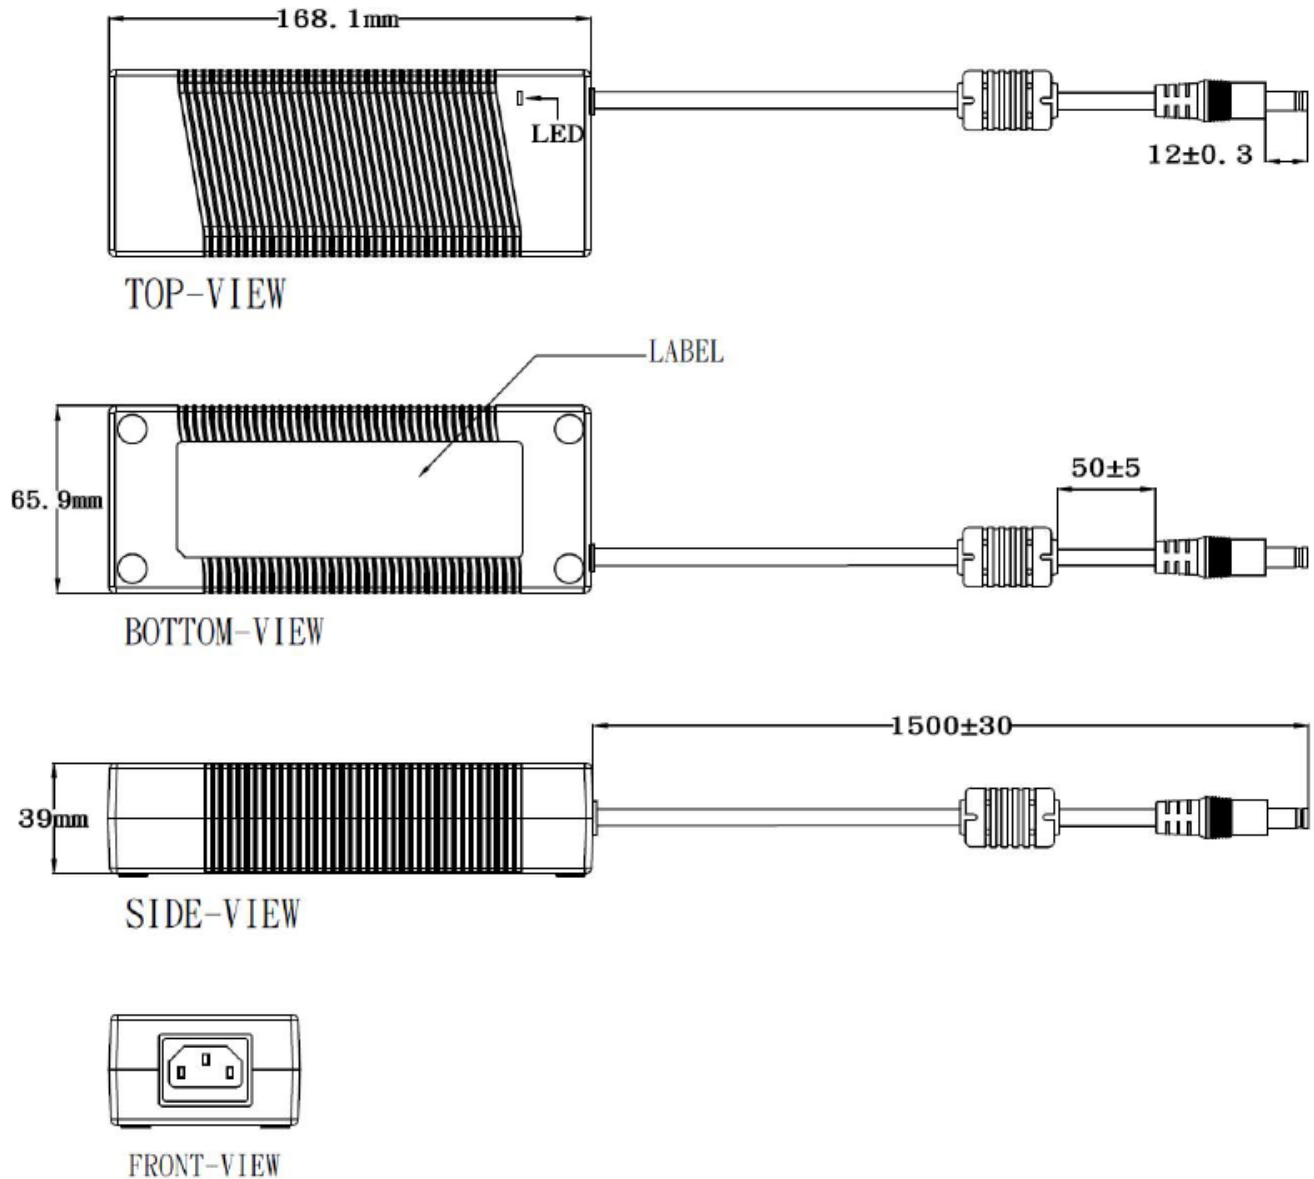| Specification	
Part Code	SW3479-VI
Input Voltage Range	100 → 240 Vac
Input Frequency Range	47 → 63Hz
Input Connector	IEC 320-C14
Input Current Rated	1.6A Max
Inrush Current	80 A Max. / 230 Vac (Cold start at 25 ºC, full load)
Leakage Current	<3.5mA
Efficiency	88%
Input Power (Output: No Load)	0.21 W (At 230Vac & No load)
Output Voltage Rating	24VDC
Output Current Range	5A Max
Output Min Current	0A
Output Connection Type	2.1 x 5.5 x 12 mm centre positive – Straight
Line and Load Regulation	+/-5%
Over Voltage Protection	V out * 150% Max. (Latch)
Over Load Protection	I out *170% Max.
Short Circuit Protection	Automatic recovery after short-circuit fault being removed
Ripple Voltage	240mV Max.
Hi-Pot	1500Vac or 2121VDC 10mA 1 min
Safety Approved	UL,CUL,GS,PSE,BSMI,CB,RCM
EMI Standard	CE / FCC Class B: Conduction & Radiation Met
Operating Temperature Range	0°C → +40 °C
Storage Temperature	-20°C → 80°C
Operating Humidity	20% to 80%
Storage Humidity	10% to 90%
Dimensions	(L) 168 x (W) 66 x (H) 39 mm
Product Weight	620g
Regulator Type	Switched Mode Power Supply

POWERPAX

TT Electronics IoT Solutions Ltd
Tofts Farm East, Brenda Road, Hartlepool, TS25 2BQ, UK
t: +44 (0) 1429 852 500

EXTERNAL DESKTOP POWER SUPPLY 24VDC 120WATT

POWERPAX: SW3479-VI

Diagrams

TOP-VIEW

168.1mm

LED

12±0.3

LABEL

BOTTOM-VIEW

65.9mm

50±5

SIDE-VIEW

39mm

1500±30

FRONT-VIEW