

# Leaded Aluminium Electrolytic Capacitors **multicomp** PRO



## Feature:

- 105°C high-temperature resistance, standard product, for general purposes.

## Specifications:

Items	Characteristics											
Capacitance Tolerance	±20% (120Hz, 20°C)											
Operating Temperature Range	-40°C to +105°C				-40°C to +105°C				-25°C to +105°C			
Rated Voltage Range	6.3~100V				160~250V				350~450V			
Leakage Current	I ≤ 0.01CV or 3 (µA), Which is greater. (After 2 minutes application of working voltage)						I ≤ 0.03CV + 20 (µA), (After 3 minutes application of working voltage)					
Dissipation Factor (tan δ)	Measurement Frequency: 120Hz. Temperature: 20°C											
	Rated Voltage(V)	6.3	10	16	25	35	50	63	80	100	160~250	350~450
	tan δ(Max)	0.24	0.2	0.16	0.15	0.12	0.1	0.09	0.08	0.08	0.2	0.25
When nominal capacitance exceeds 1000µF, add 0.02 to the value above for each 1000µF increase. 20°C 120Hz												
Low Temperature Stability Impedance Ratio(Max)	Measurement Frequency:120Hz.											
	Rated Voltage(V)	6.3	10	16	25	35	50~100	160~250	350~400	450		
	Z(-25°C) /Z(20°C)	5	4	3	2	2	2	3	6	15		
	Z(-40°C) /Z(20°C)	10	8	6	4	3	3	4	-	-		
Load Life	2000 hours,with application of working voltage at 105°C											
	Capacitance Change	Within ±25% of Initial Value										
	tan δ	200% or less of Initial Specified Value										
	Leakage Current	Initial Specified Value or less										
Shelf Life	2000 hours, no voltage applied, at 105°C. After Test : UR to be applied for 30 minutes, 24 to 48 hours before measurement.											
	Capacitance Change	Within ±20% of Initial Value										
	tan δ	200% or less of Initial Specified Value										
	Leakage Current	Initial Specified Value or less										
Standards	JIS C 5141 and JIS C 5102											

## Permissible Ripple Current

TEMP. (°C)	60	70	85	105
Coefficient	1.85	1.65	1.4	1


# Leaded Aluminium Electrolytic Capacitors **multicomp** PRO

## Frequency Coefficient

WV (V)	Capacitance (µF)	Frequency (Hz)			
		50	120	1K	≧10K
≧100	<100	0.75	1	1.57	2
	100~470	0.8	1	1.34	1.5
	>470	0.85	1	1.1	1.15
≧160	0.47~470	0.85	1	1.4	1.5

## MCKSK Series

### Dimensions: (mm)

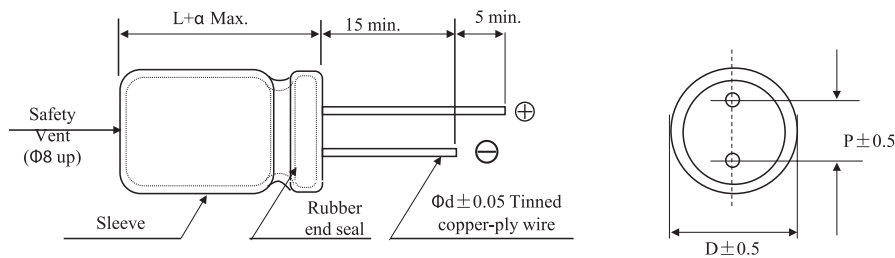

ΦD	5	6.3	8	10	13	16	18	22	25
P	2	2.5	3.5	5	5	7.5	7.5	10	12.5
Φd	0.5	0.5	0.5	0.6	0.6	0.8	0.8	0.8	1

α	(L<16) 1 L≧16) 2
---	---------------------

## Standard Ratings

D×L(mm) ; R.C.(mA rms) at 105°C, 120Hz

Cap (µF)	WV (V) (Code)	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)		63 (1J)		100 (2A)	
		Item	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L
0.1~0.47	-	-	-	-	-	-	-	-	-	-	-	5×11	11	5×11	12	5×11	17
1.0	-	-	-	-	-	-	-	-	-	-	-	5×11	15	5×11	17	5×11	20
2.2	-	-	-	-	-	-	-	-	-	-	-	5×11	24	5×11	25	5×11	30
3.3	-	-	-	-	-	-	-	-	-	-	-	5×11	30	5×11	31	5×11	36
4.7	-	-	-	-	-	-	-	5×11	30	5×11	31	5×11	36	5×11	37	6.3×12	44
6.8	-	-	-	-	-	-	-	5×11	35	5×11	37	5×11	46	5×11	51	5×11	45
10	-	-	-	-	-	5×11	42	5×11	43	5×11	47	5×11	54	5×11	58	6.3×11	75
22	5×11	54	5×11	59	5×11	63	5×11	65	5×11	75	5×11	83	6.3×11	109	8×12	112	
33	5×11	66	5×11	77	5×11	79	5×11	83	5×11	91	5×11	97	8×12	121	8×12	133	
47	5×11	78	5×11	87	5×11	94	5×11	97	6.3×11	116	6.3×11	145	8×12	163	10×17	170	
56	5×11	90	5×11	100	5×11	105	5×11	109	6.3×11	127	6.3×11	151	8×12	172	10×16	187	
68	5×11	102	5×11	119	5×11	145	5×11	151	6.3×11	169	6.3×11	196	8×12	206	10×17	238	
100	5×11	111	5×11	139	6.3×11	151	6.3×11	163	8×12	194	8×14	242	10×13	254	10×20	315	

# Leaded Aluminium Electrolytic Capacitors **multicomp** PRO


Cap (µF)	WV (V) (Code)	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)		63 (1J)		100 (2A)	
		Item	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L
220		5×11	175	6.3×11	212	8×12	237	8×12	369	10×13	332	10×17	363	10×20	436	13×25	581
330		6.3×11	233	6.3×11	272	8×12	321	10×13	436	10×16	484	10×20	514	13×21	666	16×26	714
470		6.3×11	266	8×12	299	8×14	381	8×16	460	10×20	581	13×21	762	13×25	847	16×32	968
								10×16	448								
560		8×12	272	8×12	306	8×14	387	10×16	581	10×20	629	13×21	774	13×25	871	16×36	1012
680		8×12	278	8×12	319	8×16	424	10×20	581	13×21	702	13×25	799	16×26	1004	18×32	1210
1000		8×14	484	10×13	586	10×16	617	10×20	750	13×21	908	13×25	1089	16×32	1210	18×35	1573
1500		8×20	545	10×20	592	10×20	641	13×21	787	13×25	1041	16×32	1452	18×32	1718	-	-
2200		10×16	674	10×20	918	13×21	1004	13×25	1132	22×25	1343	16×36	1609	18×35	1997	-	-
3300		10×20	908	13×21	1091	13×25	1222	13×25	1380	16×36	1730	18×35	1997	22×40	2347	-	-
4700		13×21	1162	13×25	1306	16×26	1464	16×32	1718	16×32	1950	22×40	2541	22×50	2965	-	-
6800		13×25	1385	16×26	1770	16×36	1863	18×35	2202	22×40	2602	22×50	3025	-	-	-	-
10000		16×26	1730	16×36	2236	18×35	2335	22×40	2589	22×50	3207	-	-	-	-	-	-
15000		16×36	2214	18×35	2808	22×40	2928	22×50	3328	-	-	-	-	-	-	-	-
22000		18×40	2771	22×40	3514	22×50	3630	-	-	-	-	-	-	-	-	-	-

Cap (µF)	WV (V) (Code)	160 (2C)		200 (2D)		250 (2E)		350 (2V)		400 (2G)		450 (2W)		500 (2H)	
		Item	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L	R.C.	D×L
2.2		6.3×11	26	6.3×11	28	8×12	34	8×12	30	8×12	32	8×12	39	-	-
3.3		8×12	36	8×12	42	8×12	48	10×13	39	10×13	46	10×16	51	10×20	35
4.7		8×12	48	8×12	51	10×13	61	10×13	46	10×13	57	10×20	65	10×20	48
6.8		8×12	51	8×12	61	10×13	70	10×13	76	10×16	83	13×21	87	13×21	65
10		10×13	61	10×16	73	10×16	85	10×20	97	10×20	97	10×17	95	13×21	80
22		10×16	121	10×20	163	13×21	157	13×25	151	13×21	175	16×22	152	16×26	105
33		10×20	145	13×21	175	13×21	182	13×25	176	16×26	211	16×26	211	16×32	145
47		13×21	194	13×25	242	13×25	248	16×26	254	13×30	278	16×32	339	18×35	165
68		13×21	224	13×25	253	16×26	272	16×32	260	16×32	317	18×32	508	18×45	180
82		13×25	266	13×25	278	16×26	300	16×32	284	18×26	424	18×35	569	-	-
100		16×26	363	16×26	320	16×32	393	18×32	328	18×32	484	18×40	605	-	-
120		16×26	363	16×26	363	16×32	460	18×35	347	18×35	545	18×40	666	-	-
150		16×26	399	16×32	444	18×32	545	18×40	387	18×40	605	22×45	750	-	-
220		16×36	520	18×32	641	22×35	847	-	-	-	-	-	-	-	-
330		18×35	726	22×35	750	-	-	-	-	-	-	-	-	-	-
470		18×40	877	22×40	925	-	-	-	-	-	-	-	-	-	-

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 sg.element14.com/b/multicomp-pro

**multicomp** PRO

## Explanation of parts numbers

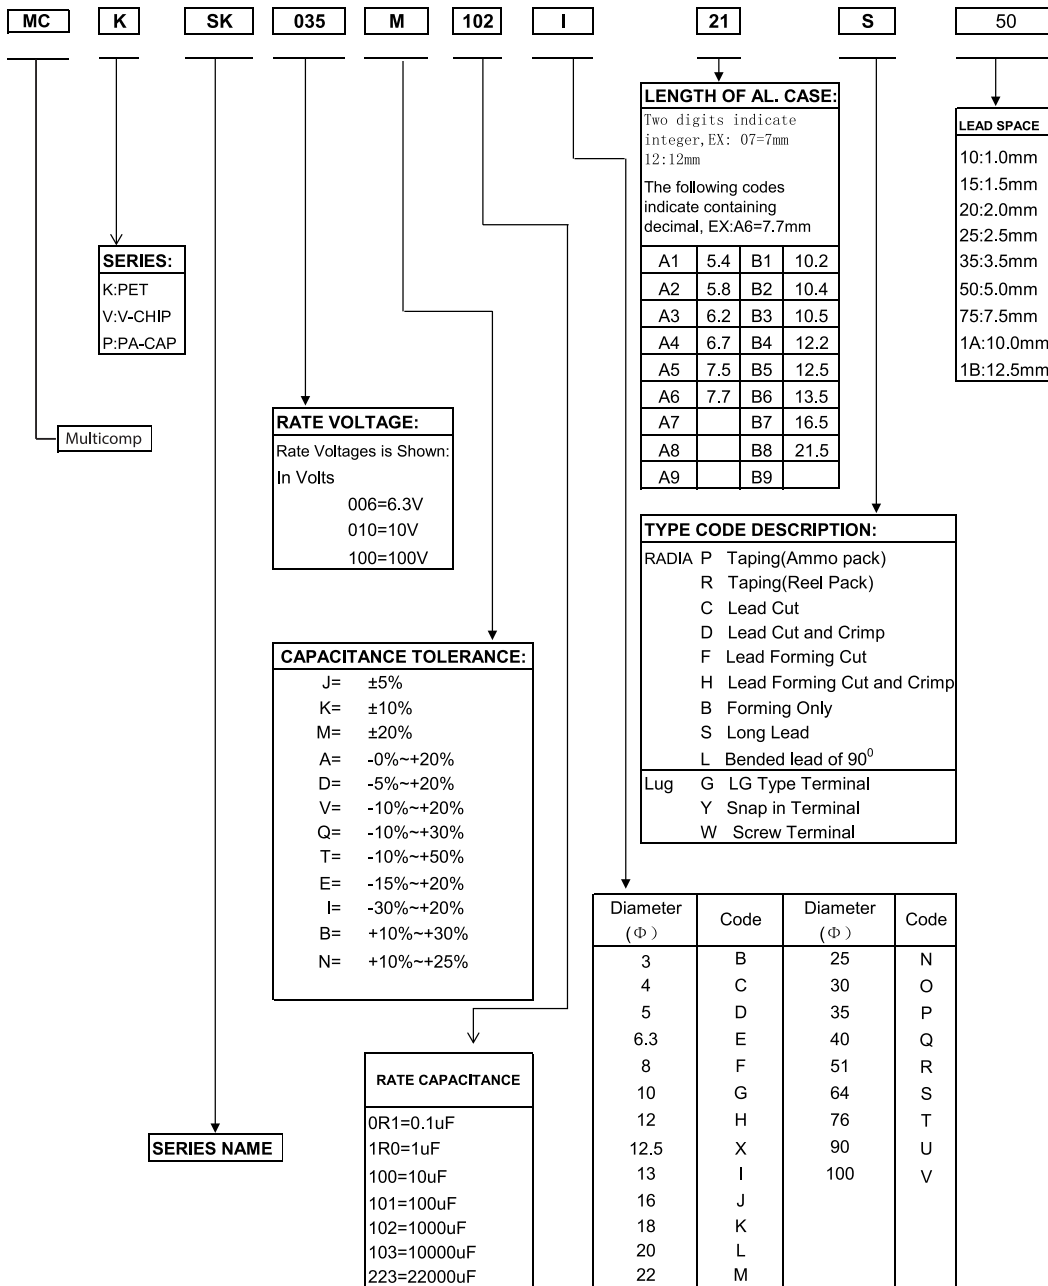

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.