

TX6000™ Enhanced Category 6 U/UTP Copper Cable

specifications

Category 6 cable shall exceed IEC 61156-5 and ANSI/TIA-568.2-D Category 6 component standards. The conductors shall be 23 AWG construction with HDPE insulation. The copper conductors shall be twisted in pairs, separated by a cross divider, and all four pairs shall be covered by a LSFRZH jacket.



technical information

Electrical performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds ISO 11801 Class E and ANSI/TIA-568.2-D Category 6 standards at swept frequencies up to 250 MHz Certified component performance up to 100 meters and exceeds the component requirements of IEC 61156-5 and ANSI/TIA-568.2-D Category 6 component standards at swept frequencies up to 250 MHz
Conductor/Insulator:	23 AWG solid copper insulated with HDPE
Insulation diameter:	0.93 – 1.06mm (0.037 – 0.042 in.)
Flame rating:	IEC 60332-1, IEC 60754-1 and -2, IEC 61034-2, EN 50575: Cca-s1a,d1,a1
PoE compliance:	Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications
Installation tension:	110 N (25 lbf) maximum
Temperature rating:	0°C to 50°C (32°F to 122°F) during installation -20°C to 75°C (-4°F to 167°F) during operation
Cable jacket:	LSFRZH
Cable diameter:	5.8mm (0.232 in.) nominal
Cable weight:	12 kg/305m (26 lbs./1000 ft.)
Packaging:	305m (1000 ft.), Reelex™ Packaging Package tested to ISTA procedure 1A

key features and benefits

Third party tested	Cable has been tested as part of the TX6000™ Copper Cabling System by an independent laboratory and complies with the electrical channel requirements of the following standards: ISO 11801 Class E, EN 50173-1, and ANSI/TIA-568.2-D Category 6
Guaranteed channel performance above the standards	Industry leading channel performance above the TIA/ISO standards with headroom guarantee
Cross-divider	Separates pairs for exceptional cable performance
Reduced attenuation	Maximizes the amount of signal that reaches the receiver and increases bandwidth
Reelex™ packaging	Ensures proper performance and provides quick installation
Tested beyond the standards	Cable has been characterized to 550 MHz, 300 MHz above the standard
Descending length cable markings	Easy identification of remaining cable reduces installation time and cable scrap

applications

TX6000™ U/UTP Copper Cable is a component of the Panduit® TX6000™ Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future. With certified performance to the ISO 11801 Class E standards and ANSI/TIA-568.2-D Category 6, this system is ideal for today's high performance workstation applications. Usage of the TX6000™ Copper Cabling System includes:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet), 10GBASE-T (10 Gigabit Ethernet over limited distances as specified in the industry 10GBASE-T standards)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token ring 4/16

TX6000™ Copper Cabling System

TX6000™ U/UTP Copper Cable

LSFRZH: PUY6004**-HE


**To designate a color, add suffix BU (Blue), WH (White), YL (Yellow), IG (International Gray), BL (Black), RD (Red), GR (Green), OR (Orange), or VL (Violet).

TX6000™ Enhanced Category 6 U/UTP Copper Cable

additional specifications

Mechanical Test	
Ultimate Breaking Strength	>400 N (90 lbf)
Minimum Bend Radius	4 x cable diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	67%
Operating Voltage, Maximum	80 V

cable construction

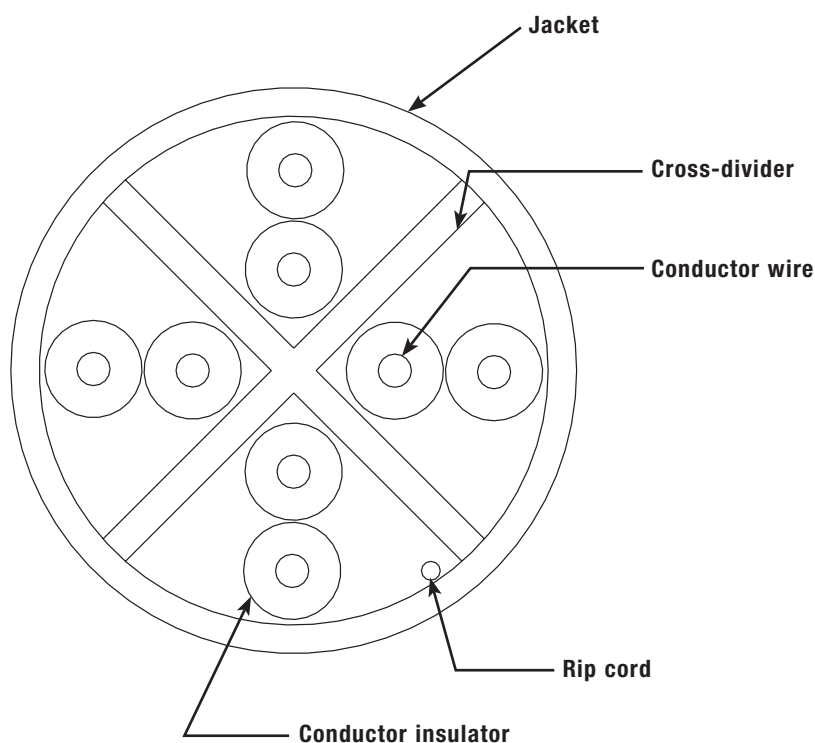

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2021 Panduit Corp.
ALL RIGHTS RESERVED.
COSP508--WW-ENG
Replaces COSP381--WW-ENG
4/2021