AC Axial Fan







Specification

Rated Voltage : 100V AC to 240V AC 50Hz/60Hz

Rated Current : 0.107 A @ 100V AC

0.058 A @ 240V AC

Rated Power : 5.1 W

Tolerance : ±20% on Rated Power and Current

Rated Speed : 3600 RPM ±10% in Free Air at Rated Voltage

Max. Airflow at Zero Static Pressure : Nominal 109 / MIN. 96.6 CFM

Nominal 185 / MIN. 164 m³/h

Max. Static Pressure at Zero Airflow : Nominal 0.37 / MIN. 0.31 inch-H₂O

Nominal 92 / MIN. 77Pa

Acoustic Noise : Nominal 44.9 dB(A) / MAX. 47.9 dB(A)

Insulation Class : F
Ingress Protection : IP55

Life Expectancy : 70,000 Hours at 40°C, 15-65% RH.

Direction of Rotation : Counter-Clockwise From Blade Side

Mechanical

Bearing System : Ball Bearing System

Materials of Frame : Thermoplastic PBT of UL 94V-0

Materials of Fan Blade : Thermoplastic PBT of UL 94V-0

Impeller Balance Grade : G6.3 Per ISO 1940-1:2003(E)

Weight : 265 Grams

Environmental

Operating Temperature Range : -25°C to +70°C
Storage Temperature Range : -40°C to +70°C
Operating Humidity Range : 5 to 90% RH
Storage Humidity Range : 5 to 95% RH

Protection

- · Automatic Restart
- Soft Start
- · Over Load Protection
- Locked Rotor Protection


Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



AC Axial Fan



Air Flow & Static Pressure Curve

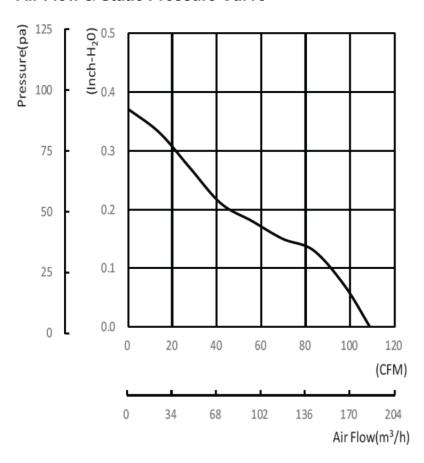


NOTE: The airflow and static pressure are measured with specific fixture.

Dimensions

Screw Type (Pan Head)	Torque	Screw Spec.	
		Size	Standard
Machine Screw	3~4 kgf-cm	M4	JISB1111-1974

AC Axial Fan



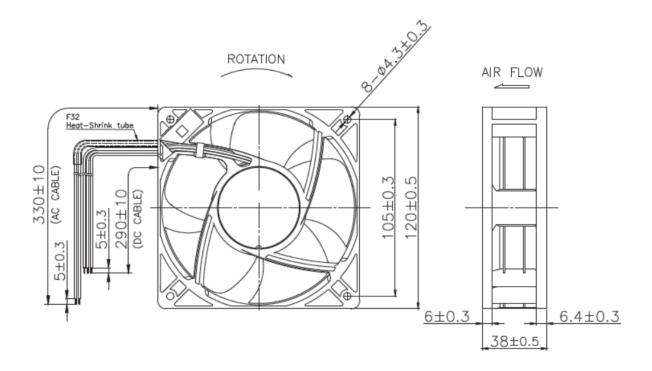

Item	Functions	Wire Type	Colour	
AC Cable	L	UL 3266 #24AWG	Crov	
	N	UL 3266 #24AWG	Gray	
DC Cable	ISO_GND	UL 1007 #24AWG	Black	
	FG	UL 1007 #24AWG	Yellow	
	PWM	UL 1007 #24AWG	Blue	

Dimensions : Millimetres

Part Number Table

Description	Part Number	
AC Axial Fan, 120mm × 38mm, 100V-240V AC, IP55	MP-CF4113HBL-10000-SB9	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Page <3>

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

