

Lead Acid Rechargeable Battery **multicomp** PRO


**RoHS
Compliant**



Application

- UPS
- Alarm and security system
- Medical Equipment
- Power tools
- Communication Equipment
- Control Equipment
- Toys


Dimensions

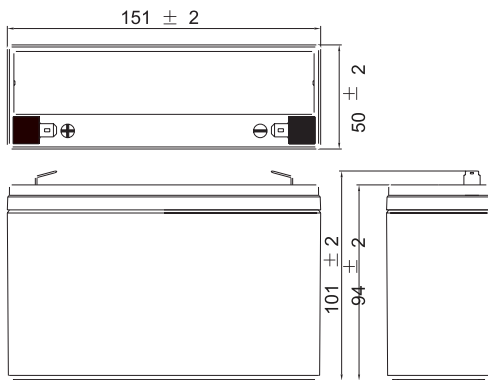

Nominal voltage	6V	
Rated Capacity (20 HR)	12Ah	
Approx Weight	1.6kg	
Terminal	Standard	F1-TAB 187E
	Optional	F2-TAB 250A
Operation Temperature		
Charge	0°C (32°F) to 40°C (104°F)	
Discharge	-20°C (-4°F) to 50°C (122°F)	
Storage	-20°C (-4°F) to 40°C (104°F)	

Capacity 25°C (77°F)	20 hour rate (0.6A)	12Ah
	10 hour rate (1.08A)	10.8Ah
	5 hour rate (1.92A)	9.6Ah
	1 hour rate (7.2A)	7.2Ah
Capacity affected by temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%
Self-discharge at 25°C (77°F) Before recharge	Capacity after 3 month	91%
	Capacity after 6 month	82%
	Capacity after 12 month	64%
Constant voltage charge	Cycle	Initial Charging Current ≤3.6A 7.2V to 7.5V at 25°C (77°F)
	Standby	6.8V to 6.9V at 25°C (77°F)
Max discharge current for 5 seconds		168A

Discharge characteristic

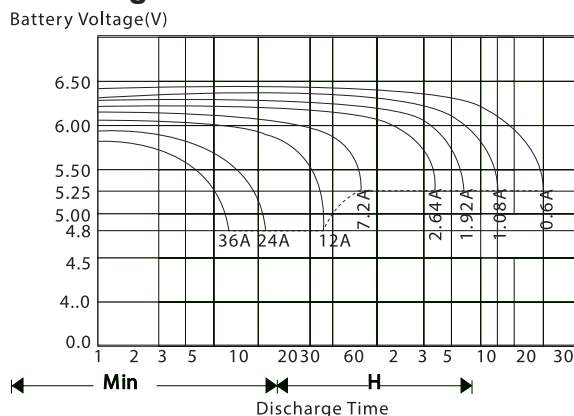

Note: Discharge shall be cut-off at 5.25V if discharge at 1CA and at 9.6V if at ≥1CA

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

Lead Acid Rechargeable Battery **multicomp** PRO

Constant current (Amp) and Constant Power (Watt) Discharge Table at 25°C (77°F)

Time (min) Final voltage		5	10	15	20	30	60	120	180	300	600
		1.8VPC	A	29.263	26.548	20.986	14.126	10.903	6.669	3.994	2.451
	W	161.743	121.989	92.109	81.771	63.154	39.096	23.688	17.208	11.304	6.794
1.75VPC	A	30.771	27.589	21.973	14.811	11.777	7.2	4.149	2.64	1.92	1.08
	W	168.789	127.851	101.571	85.577	65.469	41.436	24.552	17.856	11.736	6.84
1.7VPC	A	33.326	28.483	22.853	15.583	12	7.269	4.389	3.206	2.091	1.149
	W	178.251	130.834	105.531	88.817	67.577	42.156	25.2	18.396	12.06	6.876
1.65VPC	A	35.297	29.867	23.527	15.994	12.24	7.354	4.395	3.201	2.095	1.154
	W	186.583	134.64	106.251	90.977	68.194	42.696	25.488	18.54	12.199	6.891
1.6VPC	A	37.509	30.576	24	16.442	12.634	7.474	4.478	2.901	2.124	1.176
	W	189.977	137.006	108.257	90.463	68.914	42.984	25.668	18.648	12.276	6.891

Part Number Table

Description	Part Number
8 Battery, Lead Acid, 12Ah, 6V	MP012447

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO