

RoHS
Compliant



Description

This series provides protection for printed circuit boards and is used in a large variety of applications that need fuses with high interrupting rating and voltage rating characteristics. This miniature device is constructed of a ceramic tube and base with copper caps (tin plated copper lead wire optional). It offers excellent mounting characteristics and is 100% tested for cold resistance.


Features

- Miniature fuse with high interrupting and high voltage ratings.
- Small size, tubular design
- Copper caps / ceramic fuse body.
- 1.0mm or 1.2mm lead wires made of tin plated copper.
- Protection against harmful over-currents in primary and secondary applications.
- Lead-free, Halogen-free, RoHS compliant
- Designed according to UL-248-14
- High surge withstand: 20 cycles of 1.2/50 us-8/20us, 20kV/10kA surg

Specifications

Operating Temperature	: -55°C to 125°C
Storage Conditions	: +55°C to +85°C
Relative humidity	: ≤ 75% yearly average without dew, maximum 30 days at 95%
Vibration Resistance	: 24 cycles at 15 min. each (60068-6) 10-60Hz at 0.75mm amplitude 60-2000Hz at 10g acceleration

Construction And Mechanical Characteristics

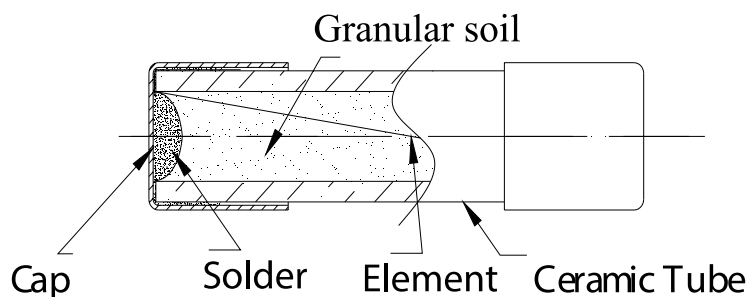

Dimensions : Millimetres

Electrical Specifications

Time vs Current Characteristics Table

(measured with constant current power supply) (According to UL 248-14)


Rated Current	100 %	200%
21A	>4h	<120s

Electrical characteristics


Electrical Characteristics at 25°C						
Amp Code	Rated Current	Rated Voltage	Voltage drop Max. (mV)	Typical Cold Resistance (mΩ)	Nominal Melting I ² t (A ² sec)	Breaking Capacity
MP013391	21A	125V AC 250V AC	100	2.45	5261	200A @ 600V AC 200A @ 150V DC

Notes: The current values used for calculating I²T should be at 10I_n.

Average Time Current (I-T) Curves

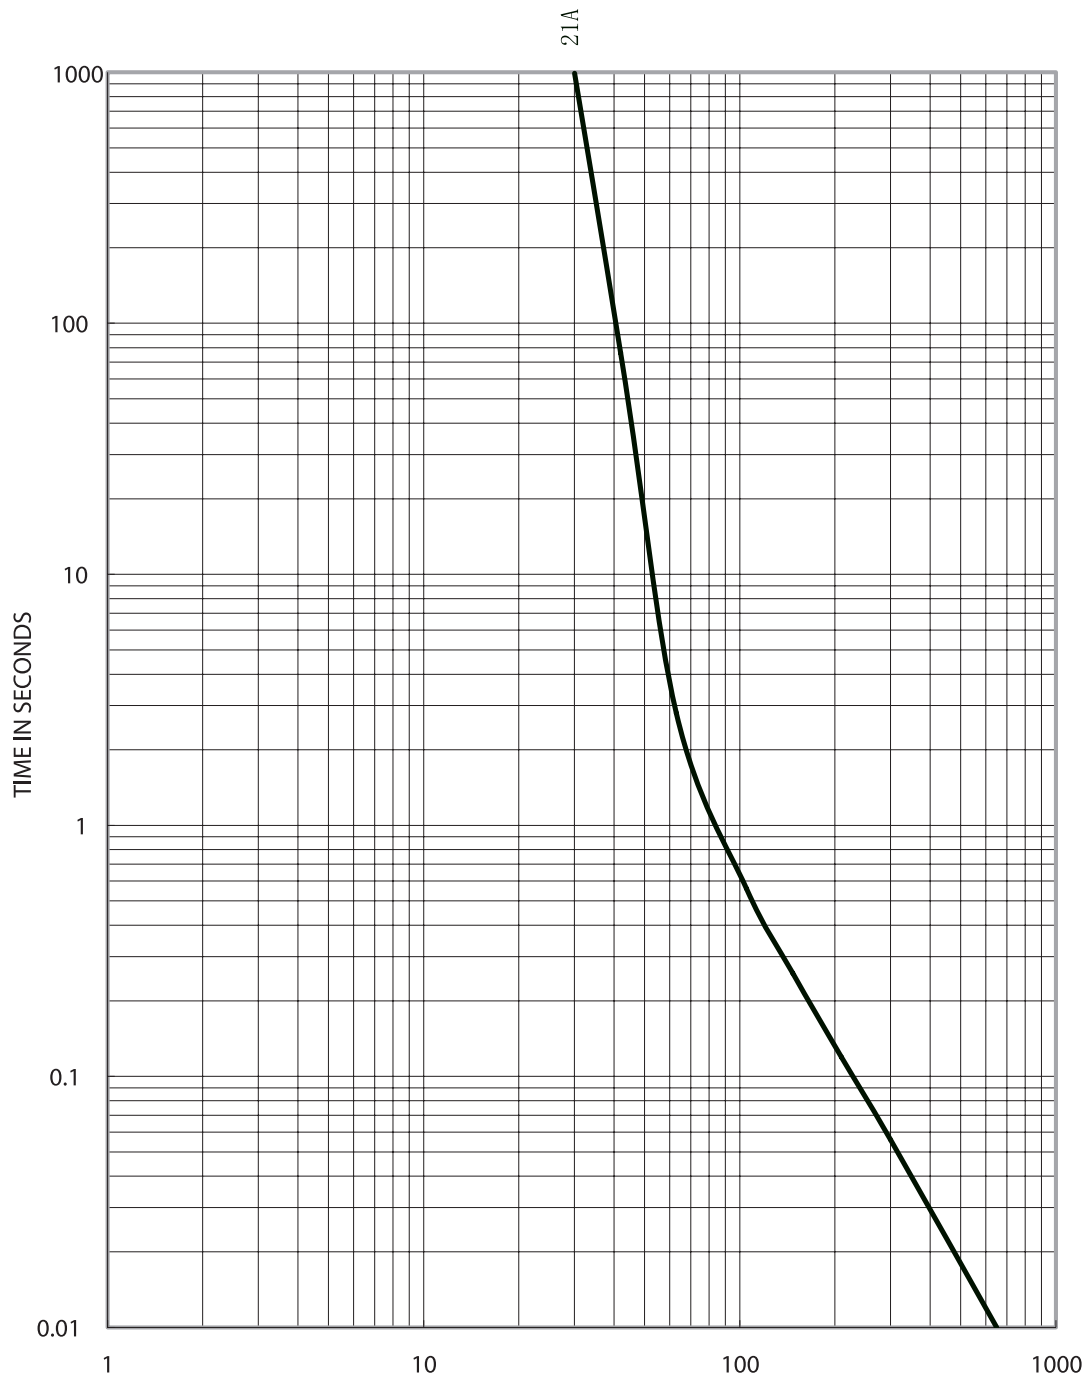

Temperature Derating Curve

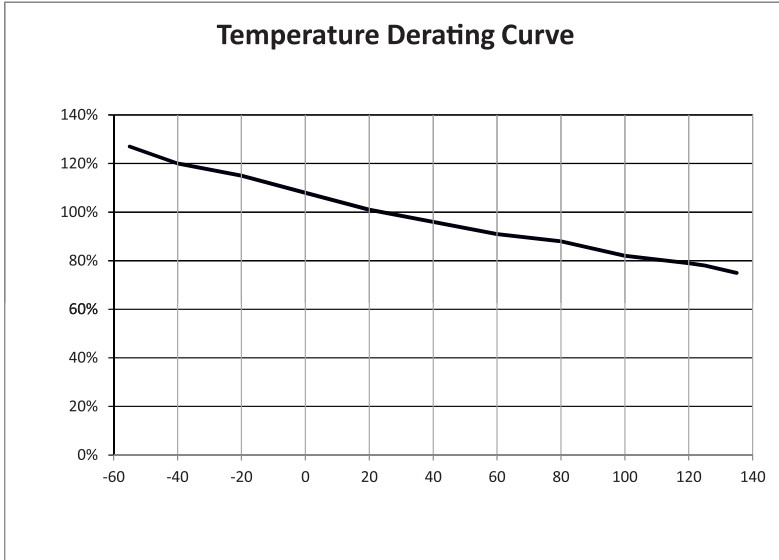

Calculation for ideal fuse selection = $\frac{\text{Operating Current (A)}}{\text{Rating (\%} \times 0.75)}$

Part Number Table

Description	Part Number
Cartridge Fuse, 21A, 600V AC, Lead Wire 38mm	MP013391

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.