

Introduction


Specification

Board Overview

Tutorial

FAQ

More Documents


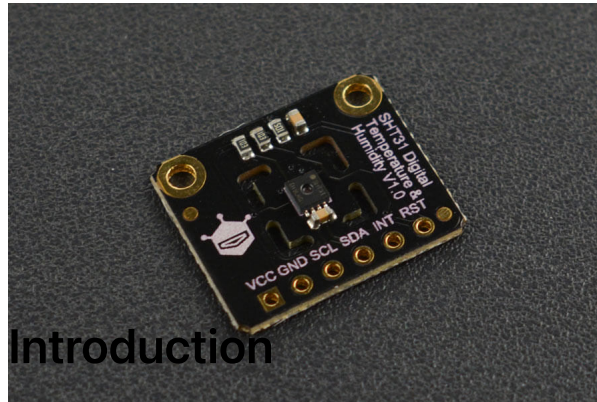


(<https://www.dfrobot.com/product-2013.html>)

This DFRobot SHT31 digital temperature and humidity sensor is based upon the Sensirion SHT31 sensor IC. Thanks to Sensirion's CMOSens® technology, highly integrated capacitive humidity sensing components and band-gap temperature sensing components, the SHT31 offers high reliability and long-term stability with low power consumption, fast response and strong anti-interference ability. The sensor supports IIC communication, and is compatible with 3.3V/5V controllers like Arduino, micro:bit, ESP32. It is easy to achieve precise and high-reliability temperature and humidity sensing for urban environment monitoring, intelligent buildings, industrial automation, smart home and other Internet of Things applications.

>

SHT31 is the standard version of the SHT3x series. It provides humidity accuracy  $\pm 2\%RH$  @  $0\%RH \sim 100\%RH$  (at  $25^\circ C$ ), and temperature accuracy  $\pm 0.2^\circ C$  @  $0^\circ C \sim 90^\circ C$  (typical).

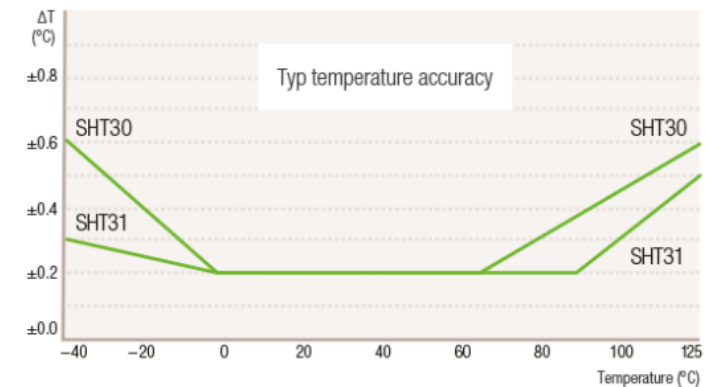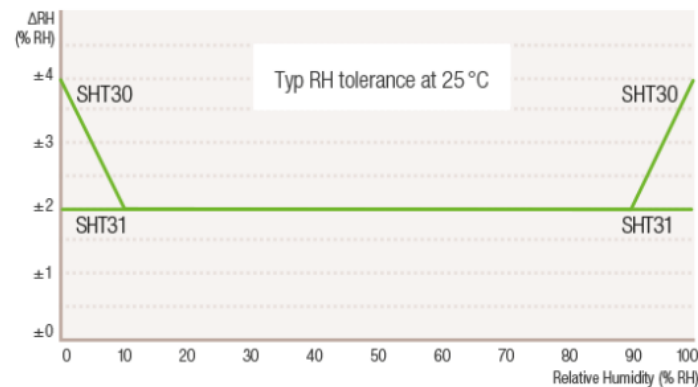

## Specification

Introduction

Specification


Board Overview

Tutorial

FAQ

More Documents

- Operating Voltage: 2.15~5.5V
- Operating Current: <1.5mA
- Humidity Accuracy:  $\pm 2\%$ RH
- Humidity Detection Range: 0%RH~100%RH
- Temperature Accuracy:  $\pm 0.2^{\circ}\text{C}$
- Temperature Detection Range:  $-40^{\circ}\text{C}\sim 125^{\circ}\text{C}$
- Communication: IIC
- Outline Dimension: 19x16mm/0.75x0.63"
- Mounting Hole Size: 2mm/0.08"
- Mounting Hole Pitch: 15mm/0.59"

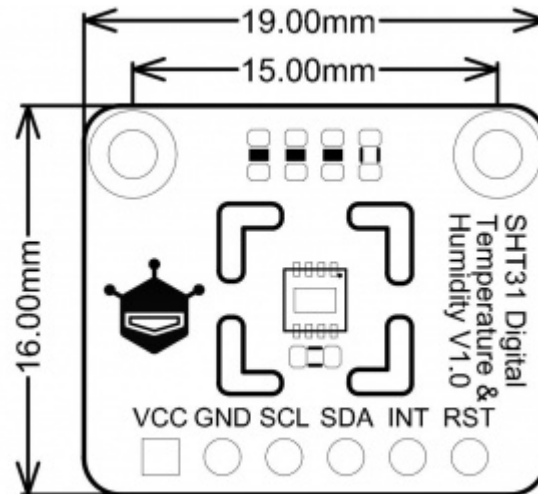

## Board Overview

Introduction



Specification

Board Overview

Tutorial

FAQ

More Documents

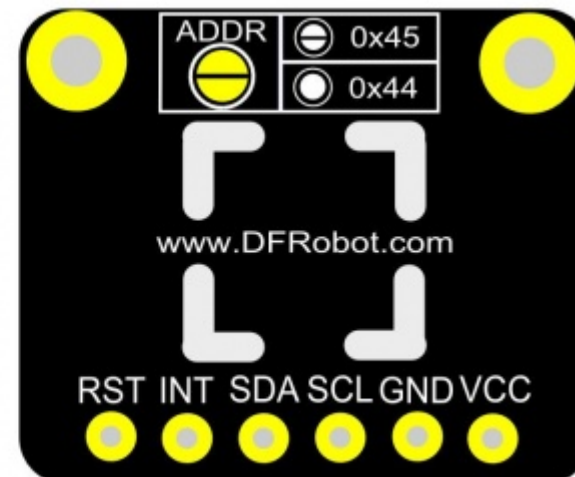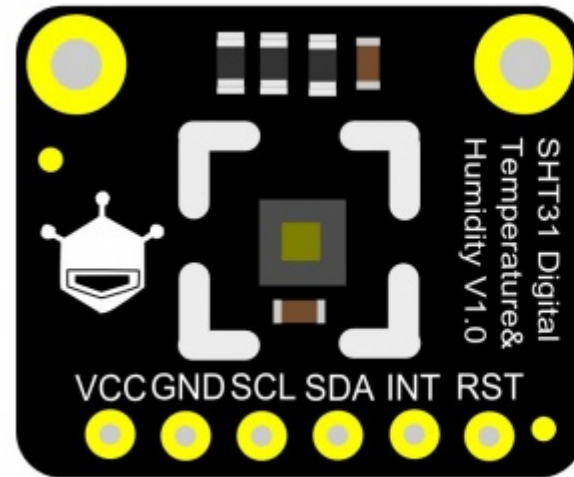

>

Name	Description
SDA	Data line
SCL	Clock Line
GND	Negative
VCC	Positive
INT	Alarm Interrupt
RST	Reset

Introduction  
Specification  
Board Overview  
Tutorial  
FAQ  
More Documents

---

>

## Tutorial

---

### Requirements

- **Hardware**
  - DFRduino UNO R3 (<https://www.dfrobot.com/product-838.html>) (or similar) x 1
  - SHT31 Digital Temperature and Humidity Sensor x1
  - Connectors
- **Software**
  - Arduino IDE (<https://www.arduino.cc/en/Main/Software>)
  - Download and install the **SHT3x Library and Example Programs** ([https://github.com/DFRobot/DFRobot\\_SHT3x](https://github.com/DFRobot/DFRobot_SHT3x)) (About how to install the library? (<https://www.arduino.cc/en/Guide/Libraries#.UxU8mdzF9H0>))
- API Function List

[Introduction](#)

[Specification](#)

[Board Overview](#)

[Tutorial](#)

[FAQ](#)

[More Documents](#)

---

```
/**
 * @brief Get the measured temperature (in degrees Celsius).
 * @return Return the temperature data of float type.
 */
float getTemperatureC();


/**
 * @brief Get the measured temperature (in degrees Fahrenheit).
 * @return Return the temperature data of float type.
 */
float getTemperatureF();

/**
 * @brief Get measured humidity(%RH).
 * @return Return the humidity data of float type.
 */
float getHumidityRH();
```

>

# Connection

- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

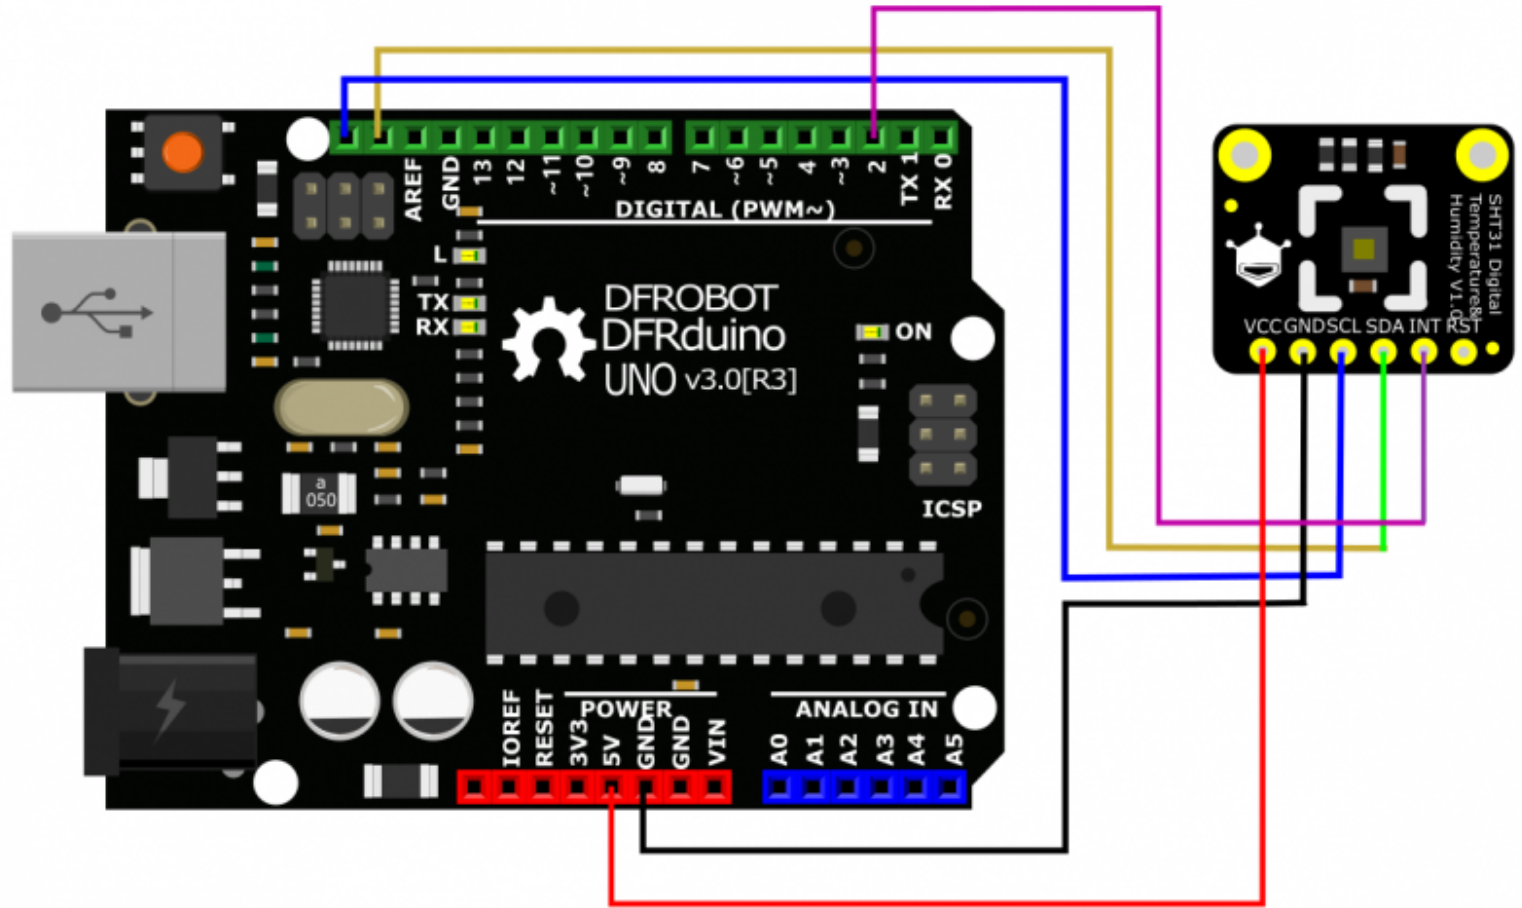

## Sample Code 1- Single Measurement Mode

In single measurement mode, the sensor collects data every time the controller board sends out the data collecting command. The power consumption could be very low in this mode since users can read data according to their needs.

[Introduction](#)  
[Specification](#)  
[Board Overview](#)  
[Tutorial](#)  
[FAQ](#)  
[More Documents](#)

---

```

/#!/
 * @file singleMeasurement.ino
 * @brief Read ambient temperature (C/F) and relative humidity (%RH) in single-read mode.
 * @n Experimental phenomenon: the chip defaults in this mode, we need to send instructions t
 * which means the repeatability of the read needs to be set (the difference between the data
 * then read the temperature and humidity data and print the data in the serial port.
 * @n Single measure mode: read data as needed, power consumption is relatively low, the chip
 * @copyright Copyright (c) 2010 DFRobot Co.Ltd (https://www.dfrobot.com)
 * @licence The MIT License (MIT)
 * @author [fengli](li.feng@dfrobot.com)
 * @version V1.0
 * @date 2019-08-21
 * @get from https://www.dfrobot.com
 * @url https://github.com/DFRobot/DFRobot_SHT3x
*/

#include <DFRobot_SHT3x.h>

/#!/
 * @brief Construct the function
 * @param pWire IIC bus pointer object and construction device, both can pass or not pass par
 * Wire in default.
 * @param address Chip IIC address, two optional addresses 0x44 and 0x45(0x45 in default).
 * @param RST RST Chip reset pin, 4 in default.
 * @n IIC address is determined by the pin addr on the chip.
 * @n When the ADR is connected to VDD, the chip IIC address is 0x45.
 * @n When the ADR is connected to GND, the chip IIC address is 0x44.
*/

//DFRobot_SHT3x sht3x(&Wire,/*address=*/0x45,/*RST=*/4);
DFRobot_SHT3x sht3x;

void setup() {
  Serial.begin(9600);
  //Initialize the chip

```

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

while (sht3x.begin() != 0) {
  Serial.println("Failed to Initialize the chip, please confirm the wire connection");
  delay(1000);
}
/**
 * readSerialNumber Read the serial number of the chip.
 * @return Return 32-digit serial number.
 */
Serial.print("Chip serial number");
Serial.println(sht3x.readSerialNumber());

/**
 * softReset Send command resets via IIC, enter the chip's default mode single-measure mode
 * turn off the heater, and clear the alert of the ALERT pin.
 * @return Read the register status to determine whether the command was executed successfully
 * and return true indicates success.
 */
if(!sht3x.softReset()){
  Serial.println("Failed to Initialize the chip....");
}

/**
 * heaterEnable(): Turn on the heater inside the chip to enable the sensor get correct humidity
 * @return Read the status of the register to determine whether the command was executed successfully
 * and return true indicates success.
 * @note Heaters should be used in wet environments, and other cases of use will result in
 */

//if(!sht3x.heaterEnable()){
// Serial.println("Failed to turn on the heater....");
//}
Serial.println("-----Read data in single measurement mode-----");
}

void loop() {
  Serial.print("Ambient Temperature(°C/F):");

```



[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

/**
 * getTemperatureC Get the measured temperature(°C).
 * @return Return float temperature data.
 */
Serial.print(sht3x.getTemperatureC());
Serial.print(" C/");
/**
 * getTemperatureF: Get the measured temperature(°F).
 * @return Return float temperature data.
 */
Serial.print(sht3x.getTemperatureF());
Serial.print(" F ");
Serial.print("Relative Humidity(%RH):");
/**
 * getHumidityRH: Get the measured humidity (%RH)
 * @return Return float humidity data
 */
Serial.print(sht3x.getHumidityRH());
Serial.println(" %RH");

/**
 * @brief Get temperature and humidity data in single measurement mode.
 * @param repeatability Set repeatability to read temperature and humidity data with the ty
 * @note Optional parameters:
 *         eRepeatability_High /**In high repeatability mode, the humidity repeatability
 *         eRepeatability_Medium,/**In medium repeatability mode, the humidity repeatabil
 *         eRepeatability_Low, /**In low repeatability mode, the humidity repeatability i
 * @return Return a structure containing celsius temperature (°C), Fahrenheit temperature (
 * @n Return 0 indicates right data return.
DFRobot_SHT3x::sRHAndTemp_t data = sht3x.readTemperatureAndHumidity(sht3x.eRepeatability_Hi
if(data.ERR == 0){
    Serial.print("Ambient Temperature(°C/F):");
    Serial.print(data.TemperatureC);
    Serial.print(" C/");
    Serial.print(data.TemperatureF);
    Serial.print(" F ");

```


&gt;

- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

```
Serial.print("Relative Humidity(%RH):");  
Serial.print(data.Humidity);  
Serial.println(" %RH");  
}  
*/  
delay(1000);  
}
```

- Result

Print out the temperature and humidity information from the serial port.

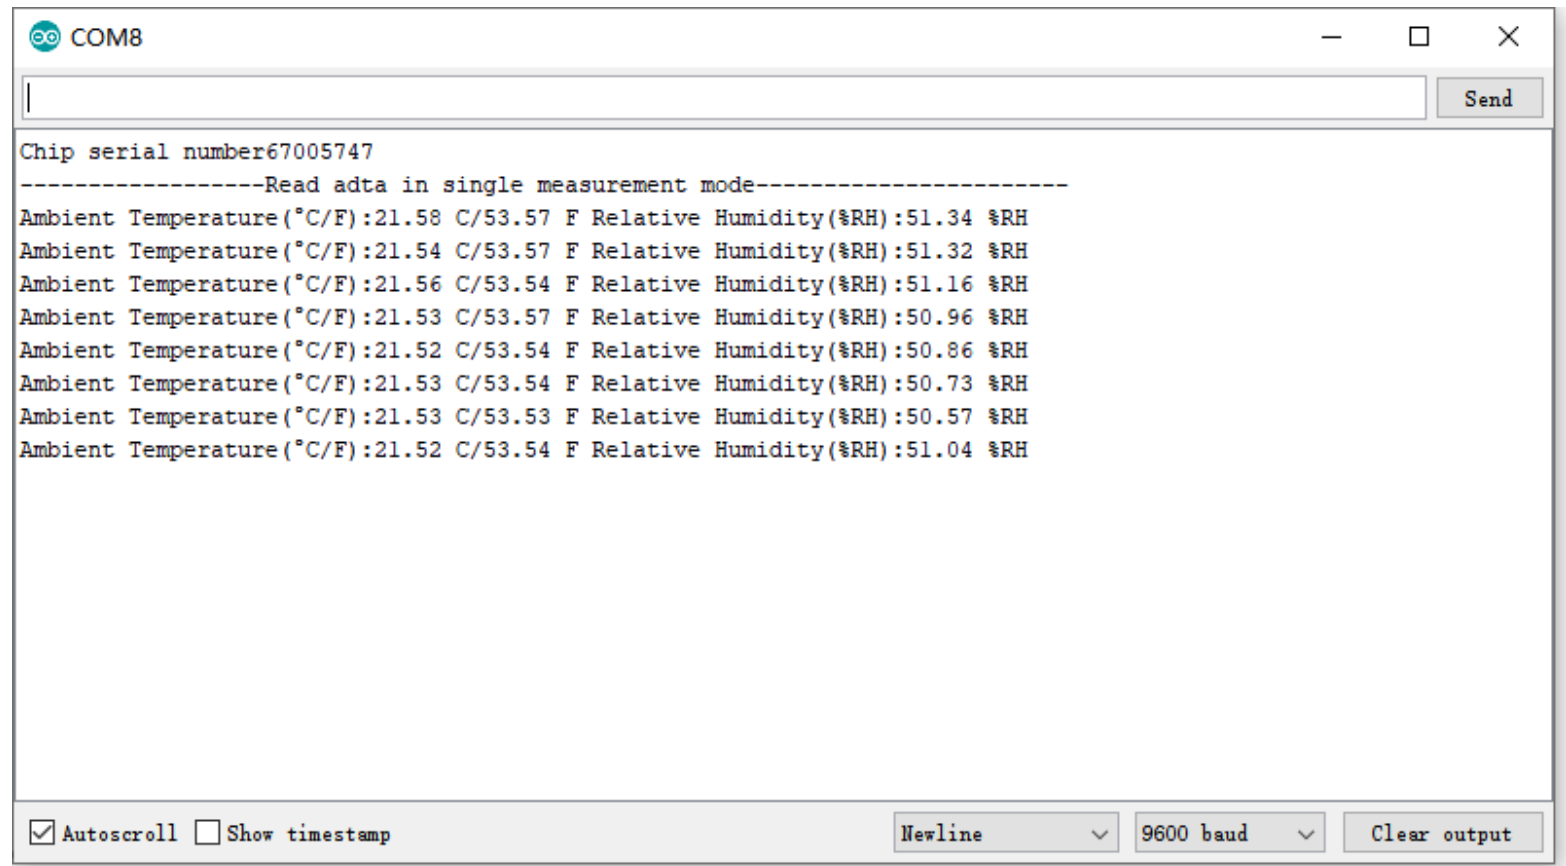

The screenshot shows a serial terminal window titled "COM8". The output text is as follows:

```
Chip serial number67005747  
-----Read adta in single measurement mode-----  
Ambient Temperature(°C/F):21.58 C/53.57 F Relative Humidity(%RH):51.34 %RH  
Ambient Temperature(°C/F):21.54 C/53.57 F Relative Humidity(%RH):51.32 %RH  
Ambient Temperature(°C/F):21.56 C/53.54 F Relative Humidity(%RH):51.16 %RH  
Ambient Temperature(°C/F):21.53 C/53.57 F Relative Humidity(%RH):50.96 %RH  
Ambient Temperature(°C/F):21.52 C/53.54 F Relative Humidity(%RH):50.86 %RH  
Ambient Temperature(°C/F):21.53 C/53.54 F Relative Humidity(%RH):50.73 %RH  
Ambient Temperature(°C/F):21.53 C/53.53 F Relative Humidity(%RH):50.57 %RH  
Ambient Temperature(°C/F):21.52 C/53.54 F Relative Humidity(%RH):51.04 %RH
```

At the bottom of the window, there are controls:  Autoscroll,  Show timestamp, a dropdown menu set to "Newline", another dropdown menu set to "9600 baud", and a "Clear output" button.

## Sample Code 2- Period Measurement Mode

In period measurement mode, the sensor collects data at the user-set frequency.

[Introduction](#)

[Specification](#)

[Board Overview](#)

[Tutorial](#)

[FAQ](#)

[More Documents](#)

---



- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

---

```

/#!
* @file periodicDataReading.ino
* @brief Read ambient temperature (C/F) and relative humidity (%RH) in cycle read mode.
* @n Experimental phenomenon: Before we start, please set the read frequency and repeatabili
* (the difference between the data measured by the chip under the same measurement condition
* and enter the periodic read mode, and then read the temperature and humidity data.
* @n The temperature and humidity data will be printed at the serial port, after 10 seconds
* @n It will exit the cycle mode and enter 2 measurement mode: Single measurement mode and C
* @n Single measurement mode: reflect the difference between the two modes of reading data.
* @n Cycle measurement mode: the chip periodically monitors temperature and humidity, only i
* @copyright Copyright (c) 2010 DFRobot Co.Ltd (https://www.dfrobot.com)
* @licence The MIT License (MIT)
* @author [fengli](li.feng@dfrobot.com)
* @version V1.0
* @date 2019-08-20
* @get from https://www.dfrobot.com
* @url https://github.com/DFRobot/DFRobot_SHT3x
*/

#include <DFRobot_SHT3x.h>

/#!
* @brief Construct the function
* @param pWire IIC bus pointer object and construction device, can both pass or not pass par
* @param address Chip IIC address, two optional addresses 0x44 and 0x45(0x45 in default).
* @param RST Chip reset pin, 4 in default.
* @n The IIC address is determined by the pin addr on the chip.
* @n When the ADR is connected to VDD, the chip IIC address is 0x45.
* @n When the ADR is connected to GND, the chip IIC address is 0x44.
*/
//DFRobot_SHT3x sht3x(&Wire,/*address=*/0x45,/*RST=*/4);

DFRobot_SHT3x sht3x;

void setup() {

```

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

Serial.begin(9600);
  //Initialize the chip to detect if it can communicate properly.
while (sht3x.begin() != 0) {
  Serial.println("Failed to initialize the chip, please confirm the chip connection");
  delay(1000);
}

/**
 * readSerialNumber Read the serial number of the chip
 * @return Return 32-digit serial number
 */
Serial.print("chip serial number: ");
Serial.println(sht3x.readSerialNumber());
/**
 * softReset Send command resets via IIC, enter the chip's default mode single-measure mode
 * turn off the heater, and clear the alert of the ALERT pin.
 * @return Read the status register to determine whether the command was executed successfully
 * and return true indicates success.
 */
if(!sht3x.softReset()){
  Serial.println("Failed to reset the chip");
}

/**
 * pinReset Reset through the chip's reset pin, enter the chip's default mode single-measure
 * turn off the heater, and clear the alert of the ALERT pin.
 * @return The status register has a data bit that detects whether the chip has been reset,
 * and return true indicates success.
 * @note When using this API, the reset pin of the chip nRESET should be connected to RST (
 */
//if(!sht3x.pinReset()){
  //Serial.println("Failed to reset the chip");
//}

/**

```

- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

---

```

* heaterEnable() Turn on the heater inside the chip so that the sensor can have accurate h
* @return Read the status register to determine whether the command was executed successfu
* @NOTE Heaters should be used in wet environment, and other cases of use will result in i
*/
//if(!sht3x.heaterEnable()){
    // Serial.println("Failed to turn on the heater");
//}
/**
* startPeriodicMode Enter cycle measurement mode and set repeatability and read frequency.
* @param measureFreq Read the eMeasureFrequency_t data frequency.
* @note Selectable parameters:
        eMeasureFreq_Hz5,    /**the chip collects data in every 2s
        eMeasureFreq_1Hz,    /**the chip collects data in every 1s
        eMeasureFreq_2Hz,    /**the chip collects data in every 0.5s
        eMeasureFreq_4Hz,    /**the chip collects data in every 0.25s
        eMeasureFreq_10Hz   /**the chip collects data in every 0.1s
* @param repeatability Read the repeatability of temperature and humidity data, the default
* @note Optional parameters:
        eRepeatability_High /**In high repeatability mode, the humidity repeatability
        eRepeatability_Medium,**In medium repeatability mode, the humidity repeatabil
        eRepeatability_Low, /**In low repeatability mode, the humidity repeatability i
* @return Read the status of the register to determine whether the command was executed su
*/
if(!sht3x.startPeriodicMode(sht3x.eMeasureFreq_1Hz)){
    Serial.println("Failed to enter the periodic mode");
}
Serial.println("-----Read data in cycle measurement mode-----")
}

void loop() {

    Serial.print("Ambient temperature(°C/F):");
    /**
    * getTemperatureC Get the measured temperature (in degrees Celsius).
    * @return Return the float temperature data.
    */

```

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

Serial.print(sht3x.getTemperatureC());
Serial.print(" C/");
/**
 * getTemperatureF Get the measured temperature (in degrees Fahrenheit).
 * @return Return the float temperature data.
 */
Serial.print(sht3x.getTemperatureF());
Serial.print(" F ");
Serial.print("Relative humidity(%RH):");
/**
 * getHumidityRH Get measured humidity(%RH)
 * @return Return the float humidity data
 */
Serial.print(sht3x.getHumidityRH());
Serial.println(" %RH");
//Please adjust the frequency of reading according to the frequency of the chip collection
//The frequency to read data must be greater than the frequency to collect the data, otherw
delay(100);
if(millis() > 10000 && millis() < 10200){
  /**
   * stopPeriodicMode() Exit from the cycle read data
   * @return Read the status of the register to determine whether the command was executed
   * and return true indicates success.
   */
  sht3x.stopPeriodicMode();
  Serial.println("Exited from the cycle measurement mode, enter the single measurement mode
}
/**
 * readTemperatureAndHumidity Get temperature and humidity data in cycle measurement mode a
 * @return Return a structure containing celsius temperature (°C), Fahrenheit temperature (
 * @n A status of 0 indicates that the right return data.

DFRobot_SHT3x::sRHAndTemp_t data = sht3x.readTemperatureAndHumidity();
if(data.ERR == 0){
  Serial.print("ambient temperature(°C/F):");
  Serial.print(data.TemperatureC);

```

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

---

```
Serial.print("C/");  
Serial.print(data.TemperatureF);  
Serial.print("F");  
Serial.print("relative humidity(%RH):");  
Serial.print(data.Humidity);  
Serial.println("%RH");  
}  
*/  
}
```

- Result

Serial print the temperature and humidity information in period measurement mode for 10s, then exit from this mode and enter single measurement mode, and print the information.

>



- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

```
COM8
Ambient temperature(°C/F):21.22 C/53.22 F Relative humidity(%RH):52.47 %RH
Ambient temperature(°C/F):21.22 C/53.22 F Relative humidity(%RH):52.47 %RH
Ambient temperature(°C/F):21.22 C/53.22 F Relative humidity(%RH):52.47 %RH
Ambient temperature(°C/F):21.22 C/53.22 F Relative humidity(%RH):52.47 %RH
Ambient temperature(°C/F):21.22 C/53.22 F Relative humidity(%RH):52.47 %RH
Ambient temperature(°C/F):21.22 C/53.22 F Relative humidity(%RH):52.47 %RH
Ambient temperature(°C/F):21.22 C/53.22 F Relative humidity(%RH):52.47 %RH
Exited from the cycle measurement mode, enter the single measurement mode
Ambient temperature(°C/F):21.22 C/53.23 F Relative humidity(%RH):52.34 %RH
Ambient temperature(°C/F):21.20 C/53.23 F Relative humidity(%RH):52.33 %RH
Ambient temperature(°C/F):21.22 C/53.23 F Relative humidity(%RH):52.31 %RH
Ambient temperature(°C/F):21.23 C/53.22 F Relative humidity(%RH):52.30 %RH
Ambient temperature(°C/F):21.19 C/53.23 F Relative humidity(%RH):52.28 %RH
Ambient temperature(°C/F):21.27 C/53.24 F Relative humidity(%RH):52.24 %RH
Ambient temperature(°C/F):21.20 C/53.24 F Relative humidity(%RH):52.24 %RH
Ambient temperature(°C/F):21.22 C/53.23 F Relative humidity(%RH):52.24 %RH
Ambient temperature(°C/F):21.23 C/53.23 F Relative humidity(%RH):52.16 %RH
Ambient temperature(°C/F):21.23 C/53.23 F Relative humidity(%RH):52.16 %RH
Ambient temperature(°C/F):21.22 C/53.26 F Relative humidity(%RH):52.10 %RH

 Autoscroll  Show timestamp
Newline 9600 baud Clear output
```

## Sample Code 3- Temperature & Humidity Alarm

Set the temperature and humidity threshold. The pin INT generates alarm signal when exceeding the threshold.

When using this example, the pin INT of the sensor needs to be connected to the corresponding interrupt pin of main-board, refer to the pin list in the code below:

Note: the pin INT only works properly in period measurement mode.

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

/#!/
 * @file alert.ino
 * @brief Temperature and humidity over-threshold alarm.
 * @n Experimental phenomenon: The user can customize the temperature and humidity thresholds
 * and the ALERT pin generates an alarm signal once the values exceed the user-defined thresh
 * @n NOTE: The ALERT pin on the sensor should be connected to the interrupt pin on the main
 * @copyright Copyright (c) 2010 DFRobot Co.Ltd (https://www.dfrobot.com)
 * @licence The MIT License (MIT)
 * @author [fengli](li.feng@dfrobot.com)
 * @version V1.0
 * @date 2019-08-26
 * @get from https://www.dfrobot.com
 * @url https://github.com/DFRobot/DFRobot_SHT3x
 */

#include <DFRobot_SHT3x.h>
/#!/
 * @brief Construct the function
 * @param pWire IIC bus pointer object and construction device, can both pass or not pass par
 * @param address Chip IIC address, two optional addresses 0x44 and 0x45(0x45 in default).
 * @param RST Chip reset pin, 4 in default.
 * @n IIC address is determined by the pin addr on the chip.
 * @n When the ADR is connected to VDD, the chip IIC address is 0x45.
 * @n When the ADR is connected to GND, the chip IIC address is 0x44.
 */
//DFRobot_SHT3x sht3x(&Wire,/*address=*/0x45,/*RST=*/4);

DFRobot_SHT3x sht3x;
//The non-alarm status of the alert pin is low;
volatile int alertState = 0;
void alert(){
    alertState = 1 - alertState;
}
void setup() {
    Serial.begin(9600);

```

- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

```

#ifdef ARDUINO_ARCH_MPYTHON
/*
    The Correspondence Table of ESP32 Interrupt Pins And Terminal Numbers
* -----
* |           | DigitalPin | P0-P20 can be used as an external interrupt
* |   esp32   |-----|
* |           | Interrupt No | DigitalPinToInterrupt (Pn) can be used to query the inter
* |-----|
*/
attachInterrupt(digitalPinToInterrupt(P16)/*Query the interrupt number of the P16 pin*/,ale
//Open esp32's P16 pin for external interrupt, bilateral edge trigger, ALERT connected to P
#else
/*
    The Correspondence Table of AVR Series Arduino Interrupt Pins And Terminal Numbers
* -----
* |           | DigitalPin | 2 | 3 |
* |   Uno, Nano, Mini, other 328-based   |-----|
* |           | Interrupt No | 0 | 1 |
* |-----|
* |           | Pin        | 2 | 3 | 21 | 20 | 19 | 18 |
* |           | Mega2560   |-----|
* |           | Interrupt No | 0 | 1 | 2 | 3 | 4 | 5 |
* |-----|
* |           | Pin        | 3 | 2 | 0 | 1 | 7 |
* |   Leonardo, other 32u4-based   |-----|
* |           | Interrupt No | 0 | 1 | 2 | 3 | 4 |
* |-----|
*/
/*
    The Correspondence Table of micro:bit Interrupt Pins And Terminal N
* -----
* |           | DigitalPin | P0-P20 can be used as an ext
* | (When using as an external interrupt, |-----|
* | no need to set it to input mode with pinMode)|Interrupt No|Interrupt number is a pin di
* |-----|
*/
attachInterrupt(/*Interrupt No*/0,alert,CHANGE);//Open the external interrupt 0, connect AL
//UNO(2), Mega2560(2), Leonardo(3), microbit(P0).
#endif

```

- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

---

```

//Initialize the chip to detect if it can communicate properly
while (sht3x.begin() != 0) {
  Serial.println("The initialization of the chip is failed, please confirm whether the chip
  delay(1000);
}
/**
 * readSerialNumber Read the serial number of the chip
 * @return Return 32-digit serial number
 */
Serial.print("The chip serial number");
Serial.println(sht3x.readSerialNumber());
/**
 * softReset Send command resets via i2C, enter the chip's default mode single-measure mode
 * and clear the alert of the ALERT pin.
 * @return Read the status register to determine whether the command was executed successfully
 */
if(!sht3x.softReset()){
  Serial.println("Failed to reset the chip");
}
/**
 * @brief All flags (Bit 15, 11, 10, 4) in the status register can be cleared (set to zero)
 * @n ALERT can work properly only when the bit:15 is set to 0, otherwise it will remain high
 */
sht3x.clearStatusRegister();
/**
 * startPeriodicMode Enter cycle measurement mode and set repeatability, read frequency, and
 * @param measureFreq Read the data frequency, data type eMeasureFrequency_t
 * @note Selectable parameters:
         eMeasureFreq_Hz5,    /**the chip collects data in every 2s
         eMeasureFreq_1Hz,    /**the chip collects data in every 1s
         eMeasureFreq_2Hz,    /**the chip collects data in every 0.5s
         eMeasureFreq_4Hz,    /**the chip collects data in every 0.25s
         eMeasureFreq_10Hz   /**the chip collects data in every 0.1s
 * @param repeatability Read the repeatability of temperature and humidity data, the default
 * @note Optional parameters:
         eRepeatability_High /**In high repeatability mode, the humidity repeatability

```

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

eRepeatability_Medium,/**In medium repeatability mode, the humidity repeatabil
eRepeatability_Low, /**In low repeatability mode, the humidity repeatability i
* @return Read the status of the register to determine whether the command was executed su
*/
if(!sht3x.startPeriodicMode(sht3x.eMeasureFreq_10Hz)){
  Serial.println("Failed to enter the periodic mode");
}
/**
* setTemperatureLimitC Set the threshold temperature and alarm clear temperature(°C)
* setTemperatureLimitF Set the threshold temperature and alarm clear temperature(°F)
* @param highset High temperature alarm point, when the temperature is greater than this v
* @param highClear High temperature alarm clear point, alarming when the temp higher than
* @param lowset Low temperature alarm point, when the temperature is lower than this value
* @param lowclear Low temperature alarm clear point, alarming when the temp lower than the
* @note The filled value should be an integer (range: -40 to 125 degrees Celsius), -40 to
*/
//sht3x.setTemperatureLimitF(/*highset=*/35,/*highClear=*/34,/*lowSet=*/18,/*lowClear=*/20)
if(sht3x.setTemperatureLimitC(/*highset=*/35,/*highClear=*/34,/*lowSet=*/18,/*lowClear=*/20)
  Serial.println("Failed to set the temperature limit");
}
/**
* setHumidityLimitRH Set the relative humidity threshold temperature and the alarm clear h
* @param highset High humidity alarm point, when the humidity is greater than this value,
* @param highClear High humidity alarm clear point, alarming when the humidity higher than
* @param lowset Low humidity alarm point, when the humidity is lower than this value, the
* @param lowclear Low humidity alarm clear point, alarming when the humidity lower than th
* @note The filled value should be an integer (range: 0 - 100 %RH,highset>highClear>lowcle
*/
if(sht3x.setHumidityLimitRH(/*highset=*/70,/*highClear=*/68,/*lowSet=*/19,/*lowClear=*/20)
  Serial.println("Failed to set the humidity limit");
}
//Serial.println(F("string")) Save stings to flash to save the dynamic ram when compiling.
Serial.println(F("-----Alarm Detection-----"));
Serial.println(F("Alarms raised when temp and humidity are out of the threshold range. Plea
Serial.println(F("-Different main contorl UNO(2), Mega2560(2), Leonardo(3), microbit(P0), m
Serial.println(F("-----the humidity limit(%RH)-----"));

```

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

/**
 * @brief Measure relative humidity threshold temperature and alarm clear humidity
 * @return Return true indicates successful data acquisition
 */
if(sht3x.measureHumidityLimitRH()){
  Serial.print("high set:");
  //getHumidityHighSetRH() Get the high humidity alarm point
  Serial.print(sht3x.getHumidityHighSetRH());
  Serial.print("          low clear:");
  //getHumidityHighClearRH() Get the high humidity alarm clear point
  Serial.println(sht3x.getHumidityLowClearRH());
  Serial.print("high clear:");
  //getHumidityLowClearRH() Get the low humidity alarm clear point
  Serial.print(sht3x.getHumidityHighClearRH());
  Serial.print("          low set:");
  //getHumidityLowSetRH() Get the low humidity alarm point
  Serial.println(sht3x.getHumidityLowSetRH());
} else {
  Serial.println("Failed to get the humidity limit");
}
/**
 * measureTemperatureLimitC Measure the threshold temperature and alarm clear temperature(°
 * measureTemperatureLimitF Measure the threshold temperature and alarm clear temperature(°
 * @return Return true indicates successful data acquisition
 */
Serial.println("-----temperature limit(°C)-----");
//Serial.println(F("-----temperature limit(°F)-----"));
if(sht3x.measureTemperatureLimitC()){
  Serial.print("high set:");
  //getTemperatureHighSetC() Get high temperature alarm points(°C)
  //getTemperatureHighSetF() Get high temperature alarm points(°F)
  Serial.print(sht3x.getTemperatureHighSetC());
  Serial.print("          low clear:");
  //getTemperatureHighClearC() Get high temperature alarm clear points(°C)
  //getTemperatureHighClearF() Get high temperature alarm clear points(°F)
  Serial.println(sht3x.getTemperatureLowClearC());
}

```

&gt;

- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

---

```
Serial.print("high clear:");
//getTemperatureLowClearC() Get low temperature alarm clear points(°C)
//getTemperatureLowClearF() Get low temperature alarm clear points(°F)
Serial.print(sht3x.getTemperatureHighClearC());
Serial.print("          low set:");
//getTemperatureLowSetC() Get low temperature alarm points(°C)
//getTemperatureLowSetF() Get low temperature alarm points(°F)
Serial.println(sht3x.getTemperatureLowSetC());
Serial.println("-----");
} else {
  Serial.println("Failed to get temperature limit");
}
/**
 * readAlertState Read the status of the ALERT pin.
 * @return High returns 1, low returns 0.
 */
//To initialize the state of ALERT
if(sht3x.readAlertState() == 1){
  alertState = 1;
} else {
  alertState = 0;
}
}
void loop() {
  Serial.print("environment temperature(°C/F):");
  /**
   * getTemperatureC Get the measured temperature (in degrees Celsius)
   * @return Return temperature data of the type float
   */
  Serial.print(sht3x.getTemperatureC());
  Serial.print(" C/");
  /**
   * getTemperatureF Get the measured temperature (in degrees Celsius)
   * @return Return temperature data of the type float
   */
  Serial.print(sht3x.getTemperatureF());
```

[Introduction](#)[Specification](#)[Board Overview](#)[Tutorial](#)[FAQ](#)[More Documents](#)

```

Serial.print(" F      ");
Serial.print("relative humidity(%RH):");
/**
 * getHumidityRH Get measured humidity (in %RH)
 * @return Return humidity data of the type float
 */
Serial.print(sht3x.getHumidityRH());
Serial.println(" %RH");
//The read data frequency should greater than the frequency to collect data, otherwise the
if(alertState == 1){
  /**
   * @brief Determine if the temperature and humidity are out of the threshold range
   * @return Return the status code, representing as follows
   * @n 01 Indicates that the humidity exceeds the lower threshold range
   * @n 10 Indicates that the temperature exceeds the lower threshold range
   * @n 11 Indicates that both the humidity and the temperature exceed the lower threshold
   * @n 02 Indicates that the humidity exceeds the upper threshold range
   * @n 20 Indicates that the temperature exceeds the upper threshold range
   * @n 22 Indicates that both the humidity and the temperature exceed the upper threshold
   * @n 12 Indicates that the temperature exceeds the lower threshold range,
   //and the humidity exceeds the upper threshold range
   * @n 21 Indicates that the temperature exceeds the upper threshold range,
   //and the humidity exceeds the lower threshold range
   * @n 0  Back to normal, but the alarm is not cleared.
   */
  uint8_t state = sht3x.environmentState();
  //Serial.println(F("string") Save stings to flash to save the dynamic ram when compiling.
  if(state == 1) Serial.println(F("The humidity exceeds the lower threshold range!"));
  else if(state == 10) Serial.println(F("The temperature exceeds the lower threshold range
  else if(state == 11) Serial.println(F("The humidity and the temperature exceed the lower
  else if(state == 2) Serial.println(F("The humidity exceeds the upper threshold range!"));
  else if(state == 20) Serial.println(F("The temperature exceeds the upper threshold range
  else if(state == 22) Serial.println(F("The humidity and the temperature exceed the upper
  else if(state == 12) Serial.println(F("The temperature exceeds the lower threshold range
  else if(state == 21) Serial.println(F("The temperature exceeds the upper threshold range
  else Serial.println(F("T&H back to normal, but the alarm is not cleared!"));


```



- Introduction
- Specification
- Board Overview
- Tutorial
- FAQ
- More Documents

```
} else {  
  Serial.println(F("T&H in normal range, alarm cleared"));  
}  
delay(1000);  
}
```

- Result

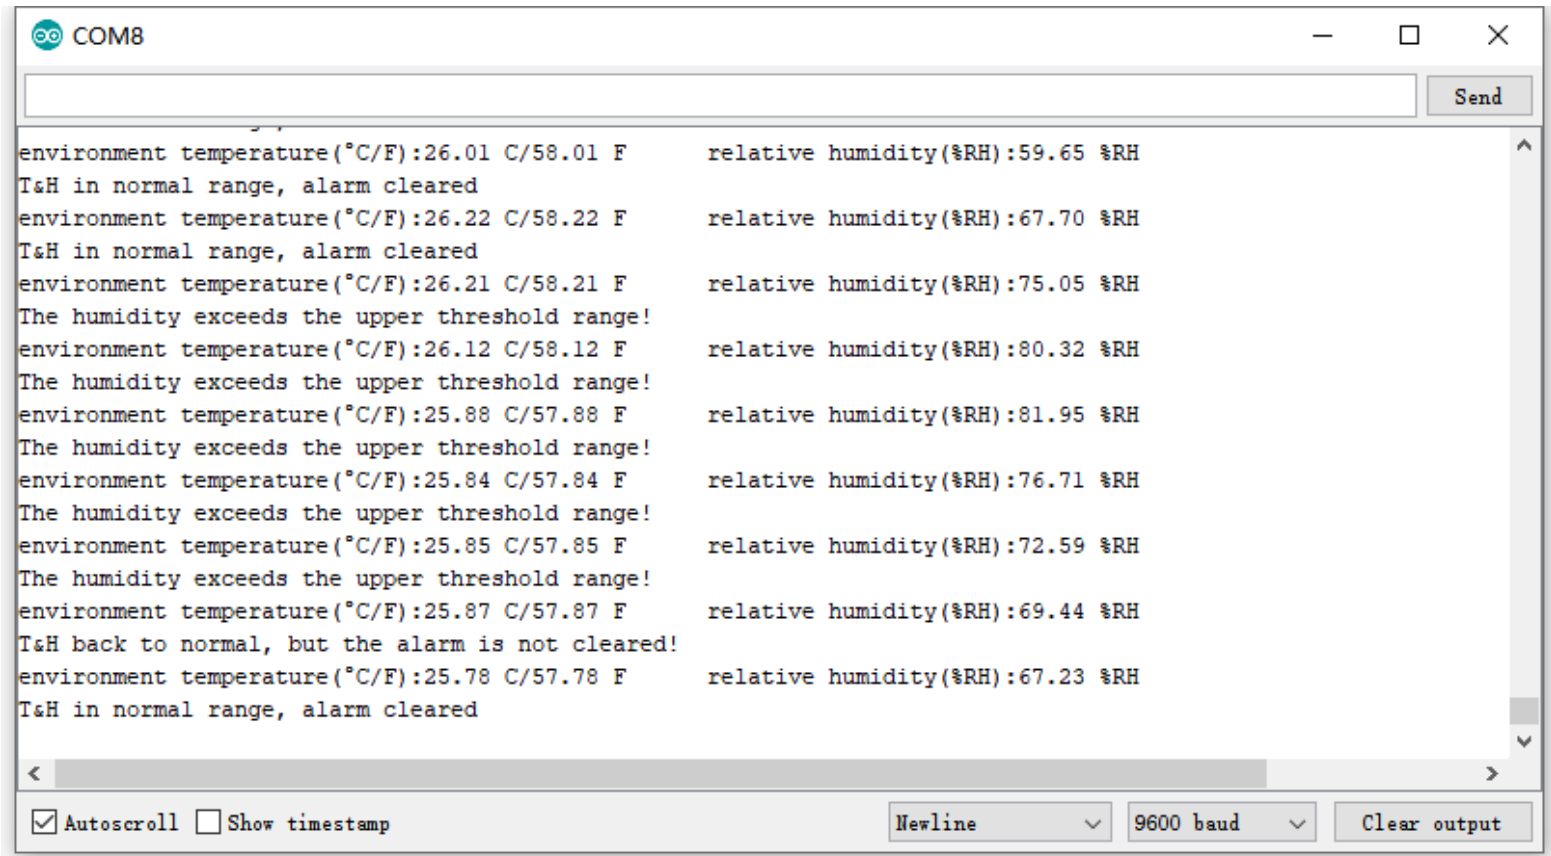

The screenshot shows a serial monitor window titled "COM8" with a "Send" button. The output text is as follows:

```
environment temperature(°C/F):26.01 C/58.01 F      relative humidity(%RH):59.65 %RH  
T&H in normal range, alarm cleared  
environment temperature(°C/F):26.22 C/58.22 F      relative humidity(%RH):67.70 %RH  
T&H in normal range, alarm cleared  
environment temperature(°C/F):26.21 C/58.21 F      relative humidity(%RH):75.05 %RH  
The humidity exceeds the upper threshold range!  
environment temperature(°C/F):26.12 C/58.12 F      relative humidity(%RH):80.32 %RH  
The humidity exceeds the upper threshold range!  
environment temperature(°C/F):25.88 C/57.88 F      relative humidity(%RH):81.95 %RH  
The humidity exceeds the upper threshold range!  
environment temperature(°C/F):25.84 C/57.84 F      relative humidity(%RH):76.71 %RH  
The humidity exceeds the upper threshold range!  
environment temperature(°C/F):25.85 C/57.85 F      relative humidity(%RH):72.59 %RH  
The humidity exceeds the upper threshold range!  
environment temperature(°C/F):25.87 C/57.87 F      relative humidity(%RH):69.44 %RH  
T&H back to normal, but the alarm is not cleared!  
environment temperature(°C/F):25.78 C/57.78 F      relative humidity(%RH):67.23 %RH  
T&H in normal range, alarm cleared
```

At the bottom of the window, there are controls:  Autoscroll,  Show timestamp, a "Newline" dropdown menu, "9600 baud" dropdown menu, and a "Clear output" button.

## FAQ

For any questions, advice or cool ideas to share, please visit the **DFRobot Forum** (<https://www.dfrobot.com/forum>)

Introduction

Specification

Board Overview

Tutorial

FAQ

More Documents

---

## More Documents

- Schematics (<https://dfimg.dfrobot.com/nobody/wiki/abb34fb147239920ee301ca74c867a77.pdf>)
- Layout with Dimension (<https://dfimg.dfrobot.com/nobody/wiki/4aae1ba0f4c030afeb2338b20cdd5d24.pdf>)
- SHT3x Datasheet (<https://dfimg.dfrobot.com/nobody/wiki/88b31350da4f54d00989c74c6fa392f7.pdf>)
- SHT3X Handling Instructions (<https://dfimg.dfrobot.com/nobody/wiki/ed23ca262d11f01046f949078f45a37c.pdf>)



Get Get **SHT31 Digital Temperature and Humidity Sensor** (<https://www.dfrobot.com/product-2013.html>) from DFRobot Store or **DFRobot Distributor**. (<https://www.dfrobot.com/distributor>)

**Turn to the Top**

>