


Slide Switch

multicomp PRO

**RoHS
Compliant**



MP5FS3S102M2QES



MP5FD3S102M2QES

Specifications

Mechanical Life	: 30,000 Make-and-Break Cycles
Contact Resistance	: 20mΩ max. Initial @ 2-4V DC 100mA For Both Silver and Gold Plated Contacts
Insulation Resistance	: 1,000MΩ min.
Dielctric Strength	: 1,000 Vrms min. @ Sea Level
Operating Temperature	: -40°C to 85°C


Materials

Case	: Diallyl phthalate (DAP) (UL94V-0)
Actuator	: Nylon, Black std.
Housing	: Stainless steel
Contact	: Brass
Terminals	: Copper Alloy

--	Contact Plating	Terminal Plating	Ratings
Q	Silver	Silver	3 Amps @120V AC or 28V DC 1 Amps @250V AC
C	Gold over Silver	Gold over silver	
R	Gold	Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)

Switch Function

P.C. MOUNTING




Model No.	Pos.1	Pos.2	Pos.3
	MP5FS3S102M2QES MP5FD3S102M2QES	ON	OFF
Term. Comm.	2-1	OPEN	2-3
Schematic			

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO


Slide Switch

Diagram

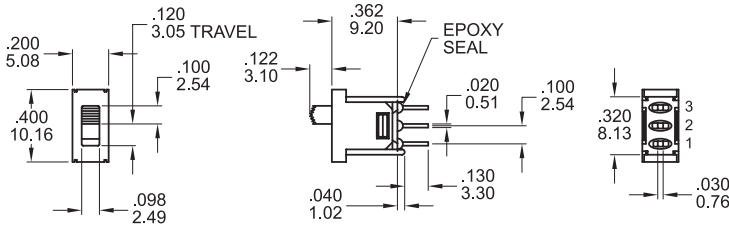


SPDT

PC Thru-hole

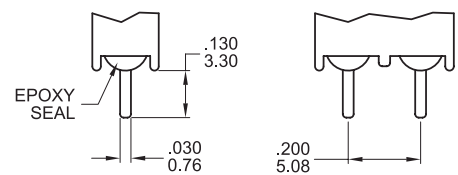

SPDT

DPDT

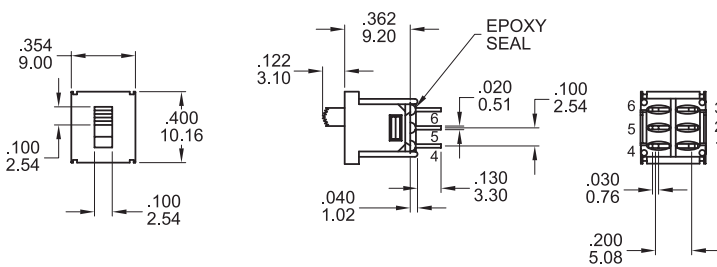

DPDT

Part Number Table

Description	Part Number
Slide Switch, PC terminal, Silver plated	MP5FS3S102M2QES
	MP5FD3S102M2QES

Dimensions : Inches (Millimetres)

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro