# multicomp PRO

## RoHS Compliant



## Specifications

Mechanical Life Contact Resistance

Insulation Resistance Dielcetric Strength Operating Temperature

- : 30,000 Make-and-Break Cycles
- : 20mΩ max. Initial @ 2-4V DC
- 100mA For Both Silver and Gold Plated Contacts
- : 1,000MΩ min.
- : 1,000 Vrms min. @ Sea Level
- : -40°C to 85°C

### Materials

Case Actuator Housing Terminals/Contact : Dially phthalate (DAP) (UL94V-0)

- : Nylon, Black std.
- : Stainless Steel
- : Copper Alloy


	Contact Plating	Terminal Plating	Ratings
Q	Silver	Silver	3 Amps @120V AC or 28V DC
С	Gold over Silver	Gold over silver	1 Amps @250V AC
R	Gold	Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)

## **Switch Function**

Model No.

MP5FD1S102M2QES

## P.C. MOUNTING



Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

### Term. Comm. 2-3, 5-4 2-3, 5-6 Schematic 2 comm. 3 comm. 5 comm. 6 comm. 6 comm. 6 comm. 6 comm. 6 comm. 7 comm.

Pos.1

ON



Pos.2

NONE


Pos.3

ON

## **Slide Switch**

# multicomp PRO

## Diagram

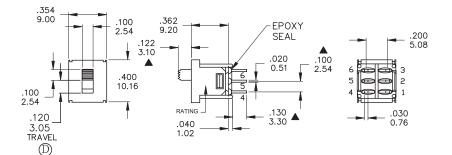

## Part Number Table

	Description	Part Number
Dimensions : Inches (Millimetres)	Slide Switch, PC terminal , Silver plated	MP5FD1S102M2QES

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

