


NUMBER OF CONTACTS	INSERT	24 + PE
TERMINATION	INSERT	SCREW
WIRE GAUGE	INSERT	0.25-2.5mm ²
FLAMMABILITY	INSERT	V-0
IP DEGREE OF PROTECTION	SHELL	IP65
ELECTRICAL CHARACTERISTIST	s (INSERT)	
RATED VOLTAGE	DIN EN 60664-1	500V (600V UL/CSA)
RATED IMPULSE VOLTAGE	DIN EN 60664-1	6000V
RATED CURRENT AT 40°C		18A
VOLTAGE PROOF	DIN EN 60512-2, TEST 4a	2.800V
INSTALLATION CATEGORY	DIN EN 60664-1	Ш
INSULATION GROUP	DIN EN 60664-1	lllb
INSULATION RESISTANCE	DIN EN 60512-2, TEST 3a	
CONTACT RESISTANCE	DIN EN 60512-2, TEST 2a	<5m OHMS
CLEARANCE	DIN VDE 0627	>4.0mm
CREEPAGE	DIN VDE 0627	>6.3mm
CURRENT CARRYING CAP.	DIN EN 60512-3, TEST 5b	DERATED
POLLUTION DEGREE	DIN EN 60664-1	3
MECHANICAL CHARACTERISTIS	TS	
INSERTION FORCE	DIN EN 60512-13-2, TEST 13b	100-120N
WITHDRAWAL FORCE	DIN EN 60512-13-2, TEST 13b	
MECHANICAL LIFETIME	IEC 60512-5, TEST 9a	>500 MATING CYCLES
CLIMATICAL CHARACTERISTIST	<u>S</u>	r
TEMPERATURE RANGE		-40°C TO 100°C
UPPER TEMPERATURE		100°C/1000H
LOWER TEMPERATURE		-40°C/16H
MATERIALS		
INSERT		PC GV
COLOR		GRAY
CONTACT PLATING		SILVER
KNURLED SCREW AND NUT		CuZn
GASKET		NBR

C146 10E 024 9411

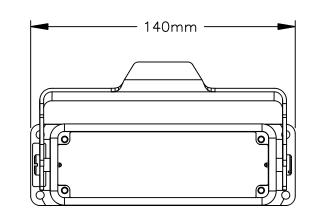

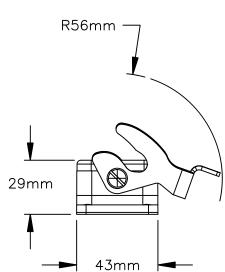

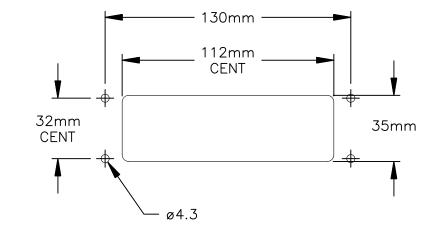

5mm

PANEL CUTOUT

1	C14610B0241021		
1	C14610F0240011		
QUANTITY	PART NUMBER		
		I ∕	
		SIGNAT	
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1°		DRAWN:	
		CHECKED:	
3) Note reference = X		ENGINEER:	
MATERIAL SPECIFICATIONS:		APPROVAL:	
		CUSTOMER:	
		THIS DRAWING IS	
PROCESS SPECIFICATIONS:		SPECIFICATIONS SHOWN HEREON THE AMPHENOL C OF REPRODUCTIC DIMENSIONS ARE	
NEXT ASS'Y:		MANUFACTURING	

