



Part Number : [1554211004](#)


Product Description : Flamar PROFIBUS DP Network Cable, WSOR Jacket, Braided Shielding Overall, 2 Circuits, 0.34mm² / 22 AWG, 8.20mm (.323") Diameter, 200.0m (656.17') Length, Violet

Series Number : 155421

Status : Active

Product Category : Industrial Cable

Engineering Number : 1X200M

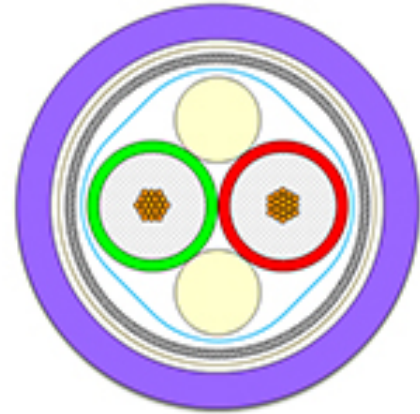

Documents & Resources

Specifications

[Product Specification 1554211004-P1E.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Not Contained per D(2022)4187-DC (10 June 2022)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Part Details

General

Status	Active
Category	Industrial Cable
Series	155421
Description	Flamar PROFIBUS DP Network Cable, WSOR Jacket, Braided Shielding Overall, 2 Circuits, 0.34mm ² / 22 AWG, 8.20mm (.323") Diameter, 200.0m (656.17') Length, Violet
Geographic Area	Global
Product Family	Flamar Standard and Custom Cables for Industrial Automation
Product Name	Flamar,Network
Protocol	PROFIBUS
UPC	889056464123

Agency

UL	E172949
----	---------

Electrical

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	600V

Physical

Bending Radius - Minimum	> 15xOD
Cable Length	200.0m
Circuits (Loaded)	2
Color - Cable Jacket	Violet
Insulation	Foam PE
Material - Outer Jacket	WSOR
Net Weight	0.076/kg
Outer Jacket Diameter	8.20mm
Packaging Type	Reel

Temperature Range - Operating	-10° to +60°C
Wire/Cable Type	UL AWM 21215 / CSA
Wire Size (AWG)	22
Wire Size mm ²	0.34

Use with Part(s)

Description	Part Number
Micro-Change (M12) Field Attachable Connectors	<u>120071</u>
Micro-Change (M12) Field Attachable Connectors and D-Sub Connectors	<u>120100</u>
Micro-Change (M12) and Mini-Change Trunk and Drop Connectors	<u>130034</u>
Field Attachable Connectors	<u>130047</u>
