Miniature Toggle Switches multicomp PRO

RoHS Compliant



Specifications

Mechanical Life

: 200,000 make-and-break cycles DC 10V & 0.1ma.

Contact Resistance : Insulation Resistance : Dielectric Strength :

: 10mΩ max. : 500V 500MΩ min.

: Brass, Chrome Plated

: Diallyl phthalate (DAP) (UL94V-0)


: 1,000 Vrms min.@sea level.

Operating Temperature : -40°C to 85°C.


Materials

- Case Actuator Bushing Housing
- Terminal/Contact
- : Brass, Nickel Plated : Stainless Steel : Brass



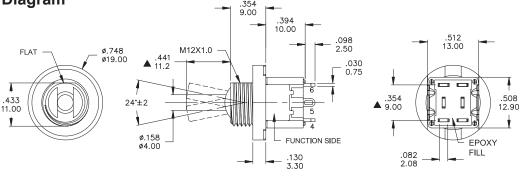

	Contact Plating	Terminal Plating	Ratings	
Q	Silver	Slver	6A @ 125V AC	
С	Gold over Silver	Gold over silver	3A @ 250V AC or 28V DC	
R	Gold	Gold	0.4 Volt-Amps (VA) max. @20V max. (AC or DC)	




Switch Function

	Pos.1	Pos.2	Pos.3
Model	-		-
MP1FD4T12BA1M1QES-5	(ON)	OFF	(ON)
Term. Comm.	2-3, 5-6		2-1, 5-4
Schematic	1 0 2 Comm. 3	N/A	2 Comm. 3
	5 Comm. 6		5 Comm. 6

Dimensions : Inches (Millimetres)

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



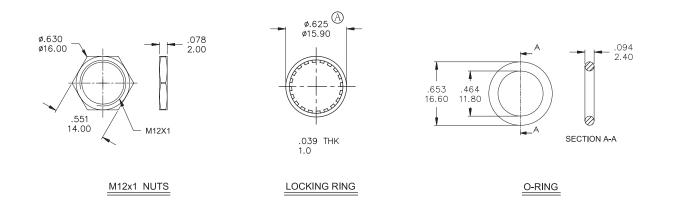

Part Number Table

	Description	Part Number
Dimensions : Inches (Millimetres)	Toggle Switch, (On)-Off-(On), Solder Lug	MP1FD4T12BA1M1QES-5

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

