



PUIaudio



Data Sheet

AS01608MS-SC9-WP-R

PUI Audio's **Mobile Series** line of speakers and receivers is designed for cutting-edge applications such as smart watches and pendants, Wi-Fi enabled security devices and action cameras, mobile radios and smart phones, as well as IoT devices. Each **Mobile Series** product features an IP67-rated face for protection against dust and water ingress.

The eight ohm 16mm x 9mm **AS01608MS-SC9-WP-R** speaker is designed for high fidelity audio reproduction in the thinnest size possible—only 2.5mm thick! Spring contacts allow for easy electrical connection.

Features:

- PEEK diaphragm for flat frequency response
- 90 dB output (2.37V @ 10cm)
- High-energy neodymium motor
- Only 2.5 mm thick
- Dustproof and waterproof IP67-rated face


Specifications

Parameters	Values	Units
Rated Input Power	0.7	Watts
Max Input Power	1	Watts
Impedance	8 ±15%	Ohms
Sensitivity SPL @ 2.37V/10cm (Avg. 0.8, 1.0, 1.5, and 2.0 kHz in 1cc enclosure)	90 ± 3	dB
Resonant Frequency (in 1cc enclosure)	850 ± 20%	Hz
Frequency Range	Fo ~ 10,000	Hz
Frame Material	PPA	-
Diaphragm Material	Mylar (PEEK)	-
Magnet Material	NdFeB	-
Weight	1.3	Grams
Ingress Protection Rating	IP67	-


Specifications (continued)

Buzz, Rattle, etc.	Should not be audible with 2.37V sine sweep from 850 Hz to 10 kHz installed in a 1cc enclosure	-
Polarity	When positive voltage is applied to the positive terminal, the diaphragm will move outward	-
Environmental Compliances	ROHS/REACH	-
Storage Temperature	-40 ~ +85	°C
Operating Temperature	-20 ~ +70	°C


Measurement Method (measured with 2.37V, Temperature: 15 ~ 35°C, Relative Humidity: 45%~85%) Speaker Measurement Circuit

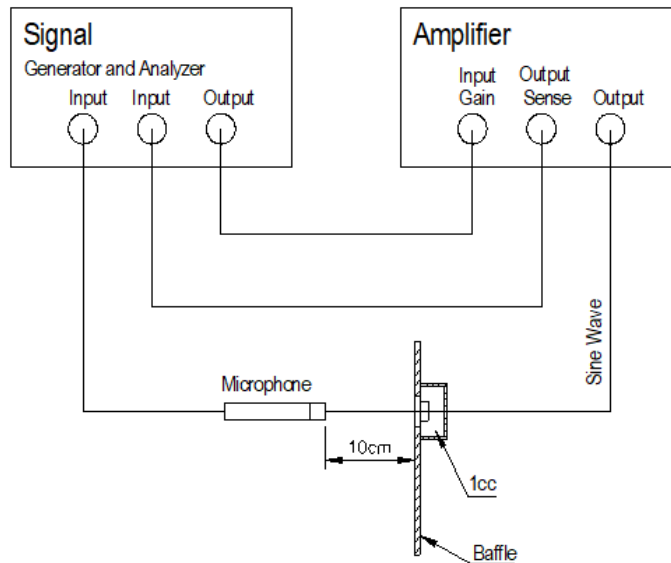

Frequency Response (measured with 2.37V @ 10cm in 1cc enclosure)

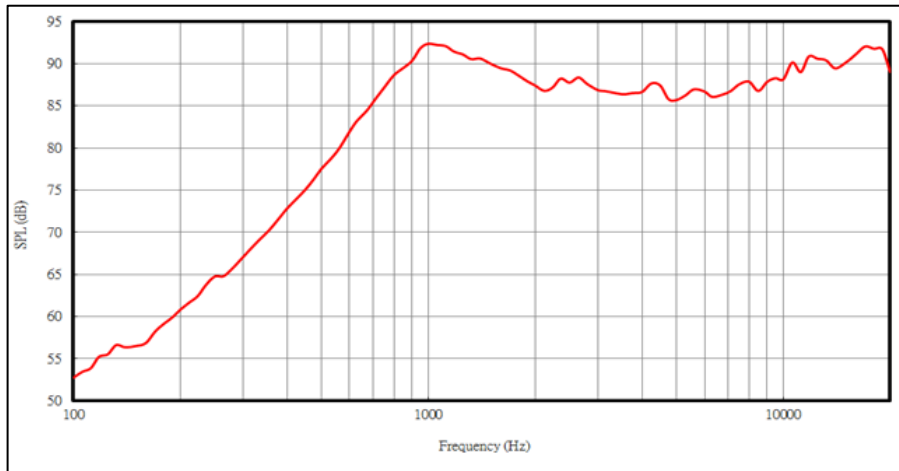

Impedance Response (Measured with speaker in a 1cc enclosure)

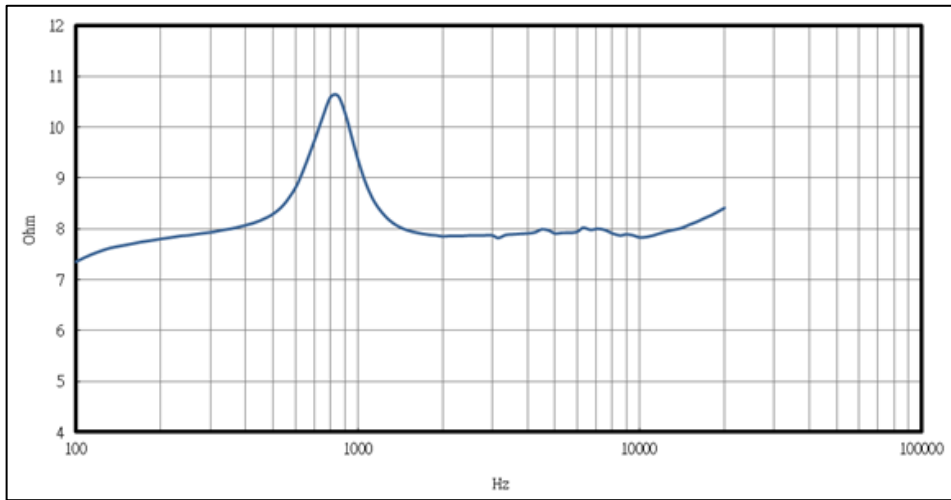


Reliability Testing


Type of Test	Test Specifications
High Temperature Test	96 hours at +85°C ± 3°C followed by three hours in normal room temperature
Low Temperature Test	96 hours at -40°C ± 3°C followed by three hours in normal room temperature
Humidity Test	96 hours at +55°C ± 3°C with relative humidity at 95% in accordance with IEC 68-2-67.
Temperature Cycle Testing	The part shall be subjected to 20 cycles using the following procedure: Low temperature: -40°C±3°C High temperature: +85°C±3°C Cycle: 30 mins at High, 10 seconds High to Low, 30 mins at Low, 10 seconds minutes Low to High
Vibration Test	10 to 55 to 10 Hz sine sweep, per minute @ 1.5mm amplitude 2 hours in each axis X, Y, and Z
Drop Test	Mount speaker to 150g fixture, drop fixture 1.5 meters, twice per side and twice for each corner
Load Test	DUTs shall be tested under each specified climatic condition; input shall be simulated program signal (per IEC 268-1) with crest factor of 1.8 to 2.2 in rated frequency range for a period of 1 second. And the test shall be repeated 60 times with intervals of 1 min. Refer to IEC 268-5.

After each test, the speaker's SPL shall be ±3 dB of the original SPL

Dimensions (Left contact is positive on the far right drawing below)

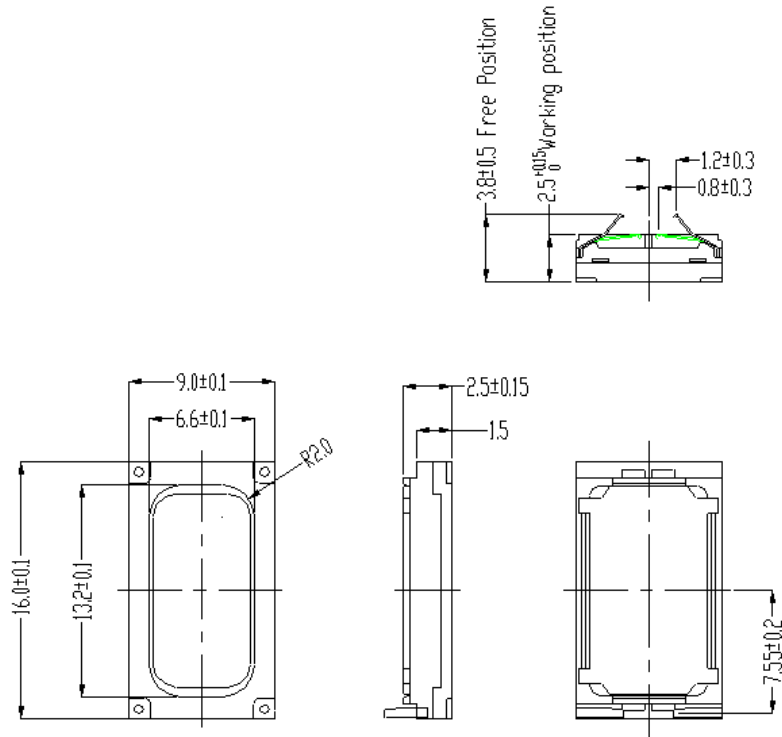


Suggested Land Pattern*

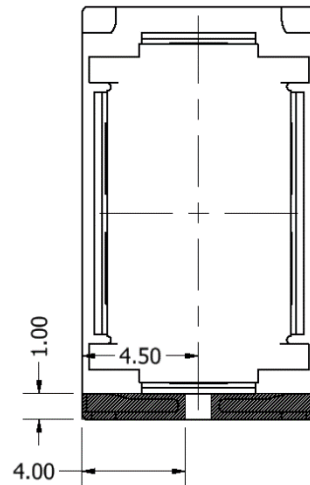

***This land pattern is advisory only and its use or adaptation is entirely voluntary. PUI Audio disclaims all liability of any kind associated with the use, application, or adaptation of this land pattern.**

Packaging

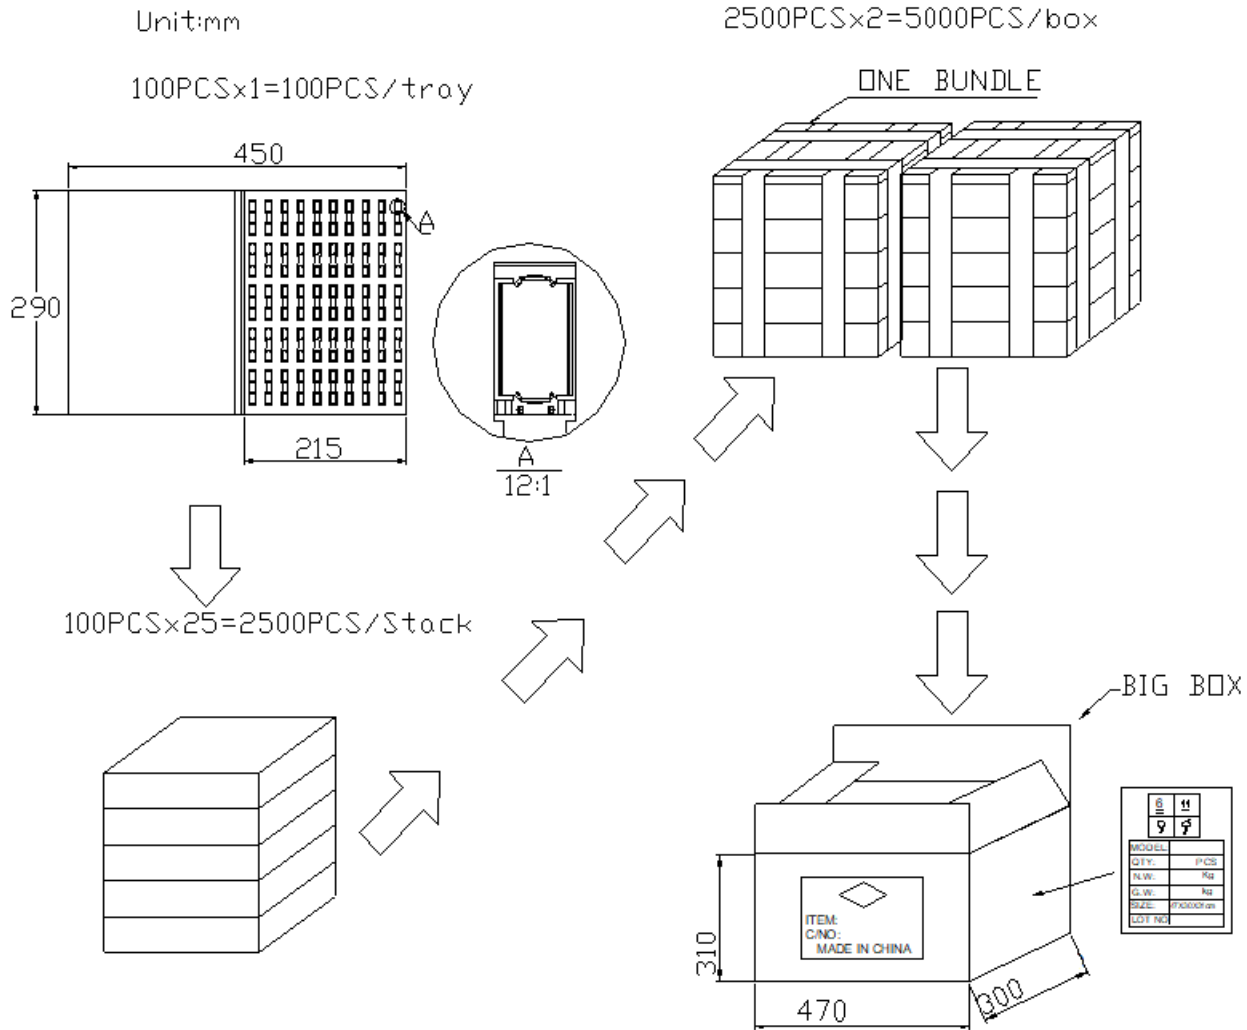

Unless otherwise specified, tolerance:±10(unit:mm)

Specifications Revisions

Revision	Description	Date	Approved
A	Released from Engineering	11/20/2017	-
B	Update Specification Format, Added Land Pattern, Revised SPL and Frequency Range	05/06/2024	M.L.

Note:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are ±0.5mm and angles are ±3°.
- Specifications subject to change or withdrawal without notice.