MICRO SWITCH
FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH — BASIC

CATALOG LISTING
BM-1RW842255511-A2

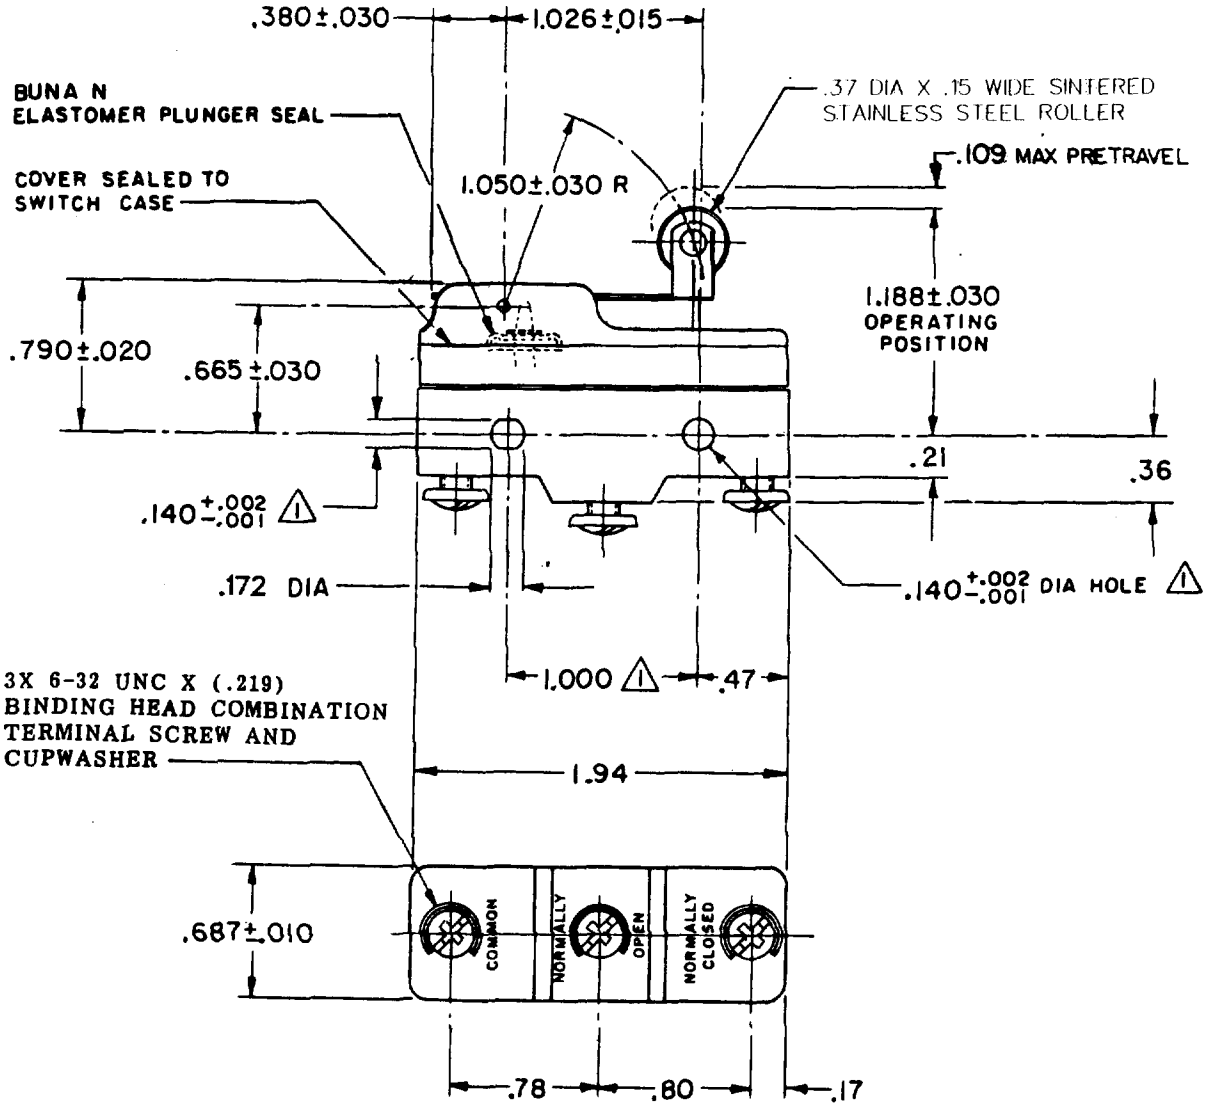

NOTE-
⚠ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ±.002 CENTERS
2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE ——— 2 OZ MAX

RELEASE FORCE — ——— 1/4 OZ MIN

DIFFERENTIAL TRAVEL — — .001 - .013

OVERTRAVEL — ——— — .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L161
22A 125, 250 OR 480 VAC
1/2 HP 125 VAC, 1 HP 250 VAC

L288
L315
L318
22A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. in	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X XX	0.38/.015
THREE PLACES			X XXX	0.13/.005
ANGLES				

DESIGN UNITS — SI METRIC ☐ — US CUSTOMARY ■

WEIGHT .076 LB

REVISIONS

A	0067209	J A P 2 MAY 90	
B	CO-70184-G	G J W 9 MAR 92	23NOV07
C	CO-73287-J	J A L 22 NOV 93	ASD
D	CO-75204B	DAW 1 FEB 94	
E	CO-77589	K D R 29 MAR 94	
F	0035411	JA 23NOV07	2 OCT 79

M BM-1RW842255511-A2 — RELEASE NO. PR-8150 — REPLACES X69903-BM — DRAWING NUMBER — ISSUE 7

RASTER — DRAWN GJW 2 OCT 79 — CHECK CEB 2 OCT 79 — FO-52848-A