FO-50360-L

CW-B0685

REV	DOCUMENT	CHANGED BY	CHECK
5	0000506	TRF 12AUG03	SAV

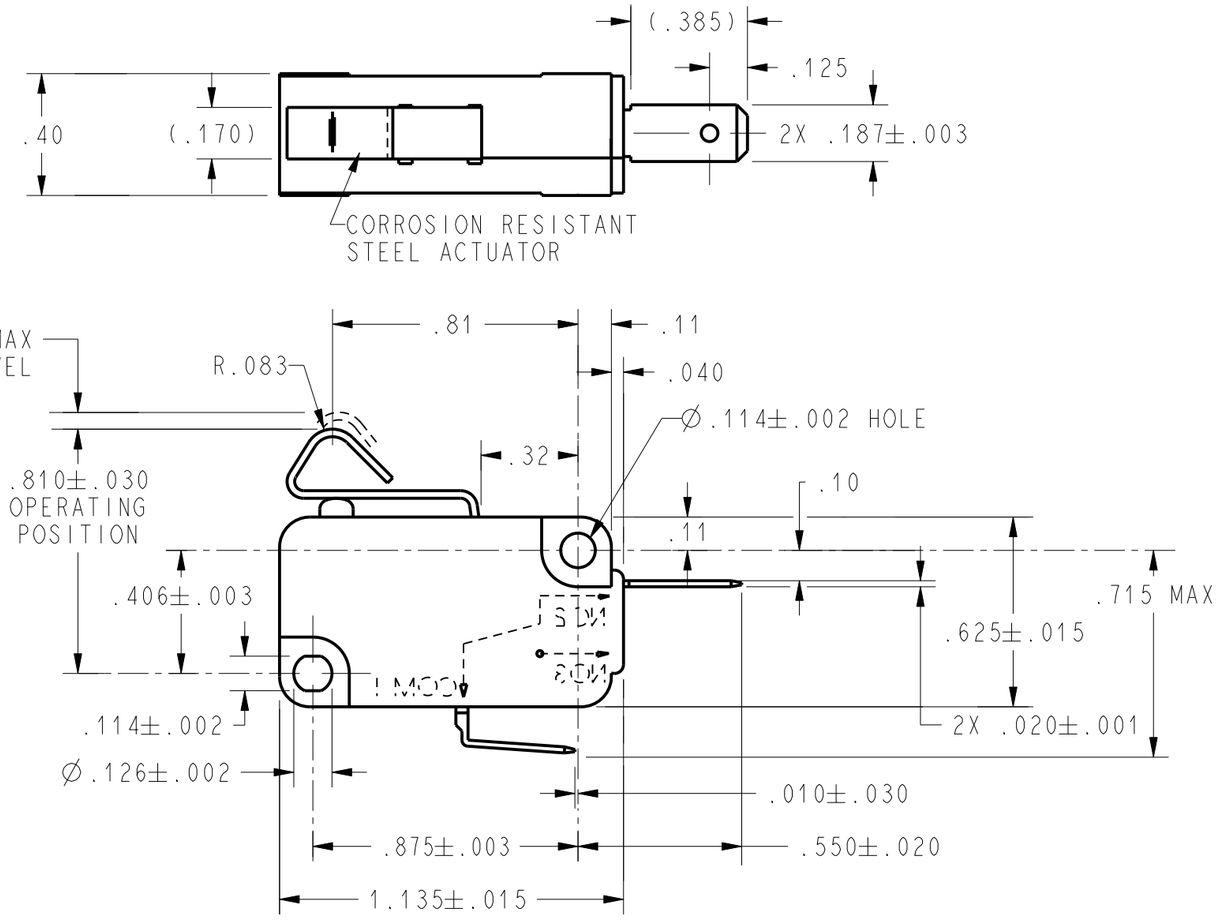

CHARACTERISTICS	
OPERATING FORCE	180 GRAMS MAX
RELEASE FORCE	20 GRAM MIN
DIFFERENTIAL TRAVEL	.015 MAX
OVERTRAVEL	.040 MIN
RELEASE TRAVEL	.007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

L163 3A 125, 250, 277 VAC
1/10HP 250 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		± 3°	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	GJW	12OCT01
CHECK	SAV	12OCT01

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-1F37D8-271-1	5

SCALE 2:1 | WEIGHT | SHEET 1 OF 1