3.5mm Audio Jack Connector Multicomp PRO



Specifications

: 12V, 1A

RoHS Compliant


Rating Contact Resistance : $30m\Omega$ Max.


Dielectric Voltage withstand : 500V AC for one Minute


Insulation Resistance : $100 M\Omega$ Min. Measured by 500 V DC


Insertion Force : 0.3kgf ~ 3.0kgf Withdrawal Force : 0.3kgf ~ 3.0kgf Life Test : 5,000 Cycles Min.


Diagram




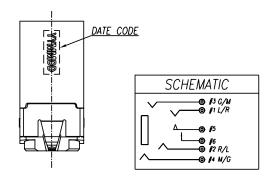


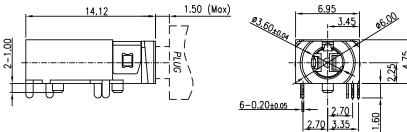









Dimensions: Millimetres

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



3.5mm Audio Jack Connector Multicomp PRO



No.	Description	Material	Plating and Colour	Qty
А	Body	High Temp. Thermoplastic UL 94V-0	Black	
В	Ring-B		Gold Flash on contact area; Gold Flash on solder area; All over nickel 50μ″ Min. Plating	1
С	Earth			
D	Ring-A			
Е	Tip Spring	Phosphor Bronze 0.2t		
F	Transfer Ter- minal			
G	Make Terminal			
Н	Separator	High Temp. Thermoplastic UL 94V-0	Black	

Part Number Table

Description	Part Number	
3.5mm Audio Jack, DIP R/A	MP014721	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

