

RoHS
Compliant



Features

- Zero Crossing or Random-on Switching
- SCR Output
- DC or AC Input
- Load Current: 10A, 20A, 30A, 40A, 50A, 75A
- Dielectric Strength: 4000Vrms
- Built-in RC Snubber Circuit
- With Integrated Heatsink, Width 30mm (for 10A-30A), 50mm (for 40A) or 105mm (50A, 75A)
- 35mm Rail DIN(EN50022)
- LED Indicator

Applications

Suitable for Temperature Chamber, Injection Molding Machine, Packaging Machine, and etc.

General Specifications

Input Specifications (Ta=25°C)

Control Voltage Range	: 4V DC to 32V DC (DC Control) 90V AC to 280V AC (AC Control)
Must Turn-on Voltage	: 4V DC (DC Control) 90V AC (AC Control)
Must Turn-off Voltage	: 1V DC (DC Control) 15V AC (AC Control)
Maximum Input Current	: 25mA(32V DC) (DC Control) 25mA(@280V AC/50Hz) (AC Control)
Maximum Input Current	: 25mA

Output Specifications (Ta=25°C)

Load Voltage Range	: 240V AC, (24V AC to 280V AC) 480V AC, (24V AC to 530V AC) 600V AC, (24V AC to 660V AC)
Maximum Turn-on Time	: 1ms (DC Control Random-on) 10ms (DC Control Zero Crossing) 40ms (AC Control)
Maximum Turn-off Time	: 10ms (DC Control) 40ms (AC Control)
Maximum Surge Current (@10ms)	: 10A (200A) 20A (300A) 30A (500A) 40A (600A)
Maximum I ² t for Fusing (@10ms)	: 10A (200A ² s) 20A (450A ² s) 30A (1250A ² s) 40A (1800A ² s)
Maximum Transient Overvoltage	: 240V AC(600Vpk)
Maximum Off-State Leakage Current@Rated Load Voltage	: KSV... Series (10mA)
Maximum On-State Voltage Drop@Rated Current	: 1.6Vrms
Minimum Off-State dv/dt@Maximum Rated Voltage	: 500V/μs





Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

Solid State Relay

General Specifications (Ta=25°C)


Dielectric Strength (50/60Hz)	: Input/Output (4000Vrms) Input, output/Base (2500Vrms)
Minimum Insulation Resistance (@500V DC)	: 1000MΩ
Minimum Power Factor (at Maximum load)	: 0.5
Ambient Temperature Range	: -30°C to +80°C
Storage Temperature Range	: -30°C to +100°C
Weight (Typical)	: 355g (10A/20A/30A) 540g (40A)

Thermal Derating Curve

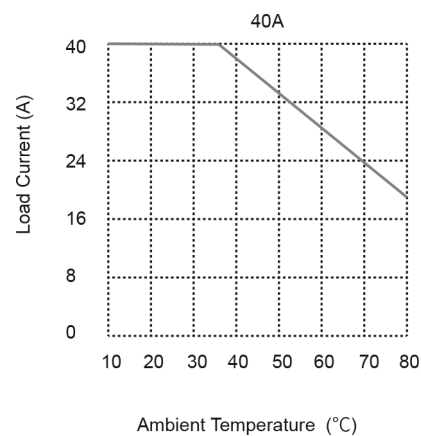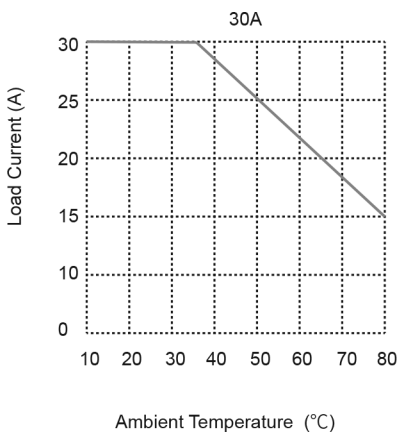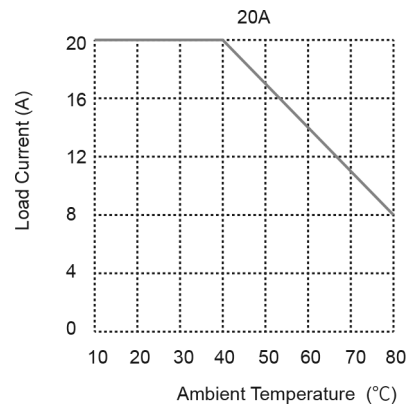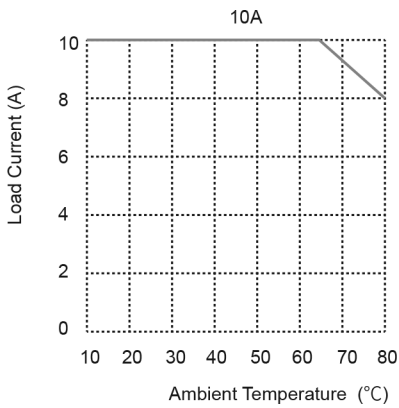


Solid State Relay

Diagram

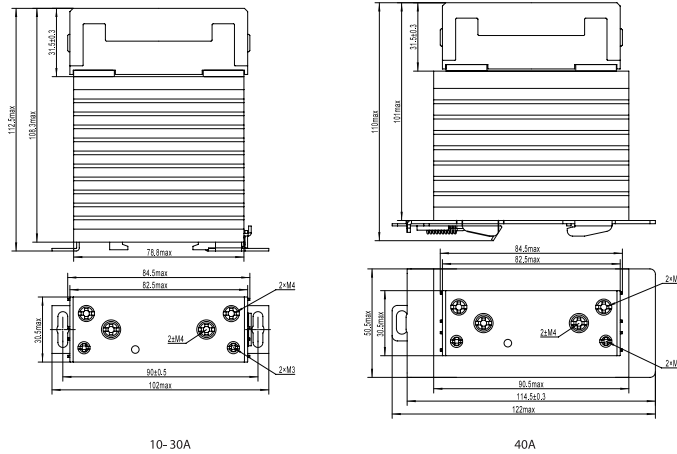

Connection Example

When mounting relays side by side please see recommended minimum spacing below.

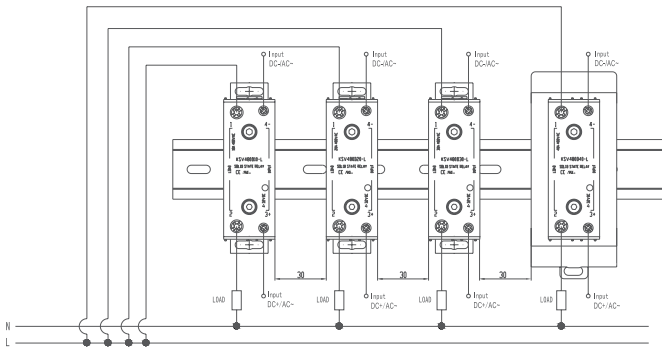

Dimensions : Millimetres

Part Number Table

Description	Part Number
Solid State Relay, DIN Rail Mount, 10A, Input 4V to 32V DC, Output 28V To 280V AC	MPKSV240D10-L
Solid State Relay, DIN Rail Mount, 20A, Input 4V to 32V DC, Output 28V To 280V AC	MPKSV240D20-L
Solid State Relay, DIN Rail Mount, 30A, Input 4V to 32V DC, Output 28V To 280V AC	MPKSV240D30-L
Solid State Relay, DIN Rail Mount, 40A, Input 4V to 32V DC, Output 28V To 280V AC	MPKSV240D40-L

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.