

multicomp	PART NO.	REVISIONS								
	RHD1-5	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	А	RELEASED	Poori	10/9/07	Suresh	10/9/07	G. C	25/9/07

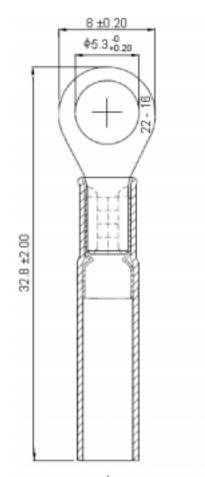



Spec	ifications:

Maximum Electric Current

Maximum Electrical Rating Shrink Temperature Operating Temperature Insulation Material Insulation Material Insulated Colour Wire Range Terminal Material Terminal Surface Treatment Terminal Thickness

AWG	22	20	18	16
Ampere	9	12	17	18

: 600 Volts.

: 150°C.

1

: -10°C to +105°C.

: High Density PE.

: With Copper Sleeve on Barrel.

: Red.

: 22 - 16 AWG (0.5 - 1.5mm²).

: Copper.

: Tin Plated.

: 0.75mm.

Part Number Table

Description	Part Number				
Terminal, Ring H/S Red 5mm	RHD1-5				

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or or	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:					
	PURPOSES ONLY.	Poornima	10/09/07	RHD1-5 - Heat Shrink Ring Terminal Red 5n					
		CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV		
		Suresh	10/09/07		M10000591	RHD1-5 DWG	A		
		APPROVED BY:	DATE:						
		G.Cook	25/09/07	SCALE: NTS	U.O.M.: mm	SHEET: 1 C	DF 1		

Dimensions

Dimensions : Millimetres