

## Analogue Silicon Microphone

### DESCRIPTION

The WM7110 is a compact high Signal to Noise Ratio (SNR) silicon analogue microphone for use in consumer applications requiring low supply current, typically 140µA, and excellent signal quality. It offers low THD and good linearity to offer excellent sound quality. Using Wolfson Microelectronics' unique CMOS/MEMS membrane technology it delivers high reliability and performance in a miniature low profile package.

The WM7110 can withstand the high temperatures needed for automated reflow solder assembly, which can damage conventional microphones. Automated pick and place equipment can be used for assembly on to circuit boards.

The WM7110E offers tighter sensitivity tolerance which reduces the variation between microphones and removes the need for production in-line calibration to compensate for microphone variation.


### FEATURES

- Excellent SNR and Sensitivity tolerance options
  - WM7110IMS, SNR 59dB, Sensitivity +/-3dB
  - WM7110IMSE, SNR 59dB, Sensitivity +/-1dB
- Low supply current 140µA
- Low profile packaging
- Automated flow solder assembly
- Analogue output
- Top Port Package
- 1.5V to 3.7V supply
- 4.72mm x 3.76mm x 1.25mm Package

### APPLICATIONS

- Mobile phone handsets
- Portable media players
- Digital still cameras
- Digital video cameras
- Bluetooth headsets
- Portable navigation devices
- Portable games consoles

### BLOCK DIAGRAM

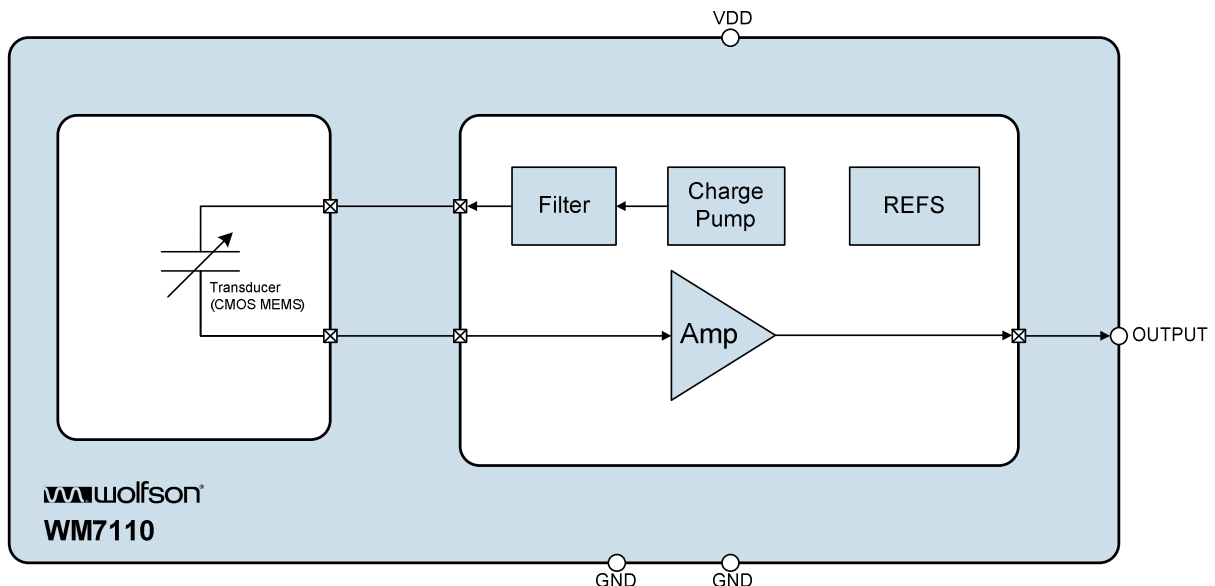


---

**TABLE OF CONTENTS**

<b>DESCRIPTION .....</b>	<b>1</b>
<b>FEATURES.....</b>	<b>1</b>
<b>APPLICATIONS .....</b>	<b>1</b>
<b>BLOCK DIAGRAM .....</b>	<b>1</b>
<b>TABLE OF CONTENTS .....</b>	<b>2</b>
<b>PIN CONFIGURATION.....</b>	<b>3</b>
<b>PIN DESCRIPTION .....</b>	<b>3</b>
<b>ORDERING INFORMATION .....</b>	<b>3</b>
<b>ABSOLUTE MAXIMUM RATINGS .....</b>	<b>4</b>
<b>RECOMMENDED OPERATING CONDITIONS .....</b>	<b>4</b>
<b>ACOUSTIC AND ELECTRICAL CHARACTERISTICS .....</b>	<b>5</b>
<b>TERMINOLOGY .....</b>	<b>5</b>
<b>FREQUENCY RESPONSE CURVE .....</b>	<b>6</b>
<b>APPLICATIONS INFORMATION .....</b>	<b>7</b>
<b>RECOMMENDED EXTERNAL COMPONENTS.....</b>	<b>7</b>
<b>CONNECTION TO A WOLFSON AUDIO CODEC .....</b>	<b>7</b>
<b>PACKAGE DIMENSIONS .....</b>	<b>8</b>
<b>RECOMMENDED CUSTOMER LAND PATTERNS.....</b>	<b>9</b>
<b>IMPORTANT NOTICE .....</b>	<b>10</b>
<b>ADDRESS: .....</b>	<b>10</b>

## PIN CONFIGURATION



Top View

## PIN DESCRIPTION

PIN	NAME	TYPE	DESCRIPTION
1	OUTPUT	Analogue Output	Microphone analogue output signal
2	GND	Supply	Analogue ground
3	GND	Supply	Analogue ground
4	VDD	Supply	Analogue supply

## ORDERING INFORMATION

DEVICE	DESCRIPTION	TEMPERATURE RANGE	MOISTURE SENSITIVITY LEVEL	PEAK SOLDERING TEMPERATURE
WM7110IMS/V	Standard	-40 to +100°C	MSL2A	+260°C
WM7110IMS/RV	Standard (tape and reel)	-40 to +100°C	MSL2A	+260°C
WM7110IMSE/V	Standard Enhanced	-40 to +100°C	MSL2A	+260°C
WM7110IMSE/RV	Standard Enhanced (tape and reel)	-40 to +100°C	MSL2A	+260°C

**Note:**

Reel quantity = 4,800

All devices are Pb-free and Halogen free.

## ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings are stress ratings only. Permanent damage to the device may be caused by continuously operating at or beyond these limits. Device functional operating limits and guaranteed performance specifications are given under Electrical Characteristics at the test conditions specified.



ESD Sensitive Device. This device is manufactured on a CMOS process. It is therefore generically susceptible to damage from excessive static voltages. Proper ESD precautions must be taken during handling and storage of this device.

Wolfson tests its package types according to IPC/JEDEC J-STD-020 for Moisture Sensitivity to determine acceptable storage conditions prior to surface mount assembly. These levels are:

MSL1 = unlimited floor life at <30°C / 85% Relative Humidity. Not normally stored in moisture barrier bag.

MSL2 = out of bag storage for 1 year at <30°C / 60% Relative Humidity. Supplied in moisture barrier bag.

MSL2A = out of bag storage for 4 weeks at <30°C / 60% Relative Humidity. Supplied in moisture barrier bag.

MSL3 = out of bag storage for 168 hours at <30°C / 60% Relative Humidity. Supplied in moisture barrier bag.

The Moisture Sensitivity Level for each package type is specified in Ordering Information.

CONDITION	MIN	MAX
Supply Voltage	-0.3V	+4.2V
Operating temperature range, T <sub>A</sub>	-40°C	+100°C
Storage temperature prior to soldering	30°C max / 60% RH max	
Storage temperature after soldering	-40°C	+100°C

Do not put a vacuum over the port hole of the microphone. Placing a vacuum over the port hole can damage the device.

For information on recommended pick and place vacuum point, please refer to the package dimension drawing.

Do not board wash the microphone after a reflow process. Board washing and the associated cleaning agents can damage the device. Do not expose to ultrasonic cleaning methods.

## RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Analogue Supply Range	VDD	1.5		3.7	V
Ground	GND		0		V

## ACOUSTIC AND ELECTRICAL CHARACTERISTICS


Test Conditions: VDD=2.1V, T<sub>A</sub> = 25°C

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	NOTE
Directivity			Omni-directional				
Sensitivity	S	1kHz 94dB SPL (0dB = 1V/Pa)	-45	-42	-39	dB	Standard
			-43	-42	-41	dB	Enhanced
Current Consumption	I <sub>VDD</sub>			140	190	μA	
Total Harmonic Distortion	THD	1kHz 104dB SPL		0.25		%	
Signal to Noise Ratio	SNR	A- Weighted 20Hz – 20kHz		59		dB	
Input Referred Noise	ENL	A- Weighted 20Hz – 20kHz		35		dB SPL	
Power Supply Rejection Ratio	PSRR		40	50		dB	
Output DC Impedance	Z <sub>OUT</sub>			100		Ω	
Minimum Load Impedance				20		kΩ	
Acoustic Overload		THD < 10%		125		dB SPL	

### TERMINOLOGY

1. Signal-to-Noise Ratio (dB) – SNR is a measure of the ratio between the sensitivity of the microphone to a 94dB SPL sine wave and the A-Weighted analogue idle noise.
2. Total Harmonic Distortion (dB) – THD is the level of the rms value of the sum of harmonic distortion products relative to the amplitude of the applied sound pressure level.
3. All performance measurements carried out with 20 kHz low pass filter, and where noted an A-weighted filter. Failure to use such a filter will result in higher THD and lower SNR readings than are found in the Acoustic and Electrical Characteristics. The low pass filter removes out of band noise; although it is not audible it may affect dynamic specification values.

### FREQUENCY RESPONSE CURVE

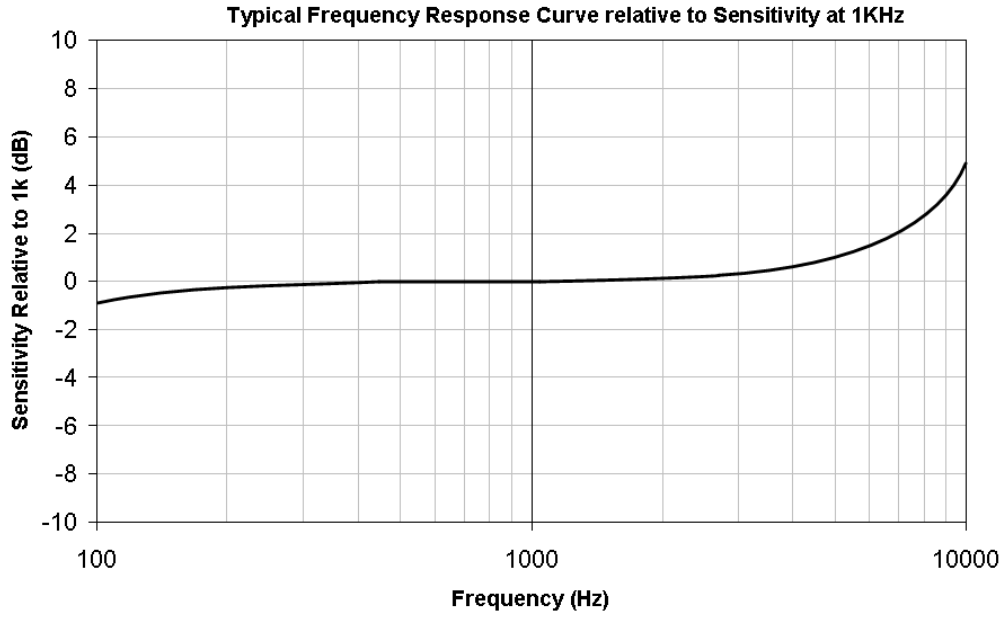

## APPLICATIONS INFORMATION

### RECOMMENDED EXTERNAL COMPONENTS

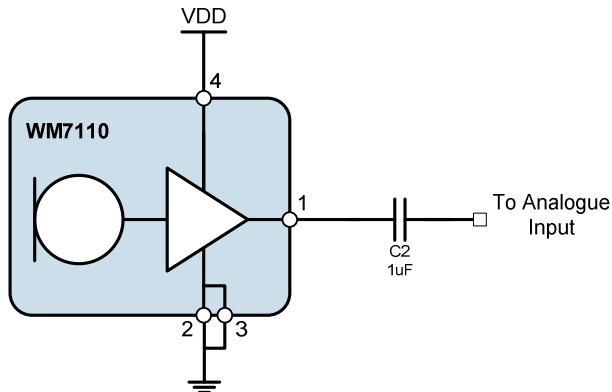


Figure 1 WM7110 Recommended External Components

#### Notes:

1. The value of C2 should be selected with reference to the input impedance of the analogue input the microphone is connected to. C2 and the input impedance create a high pass filter, the value of C2 should be selected to pass the lowest frequency of audible interest.

### CONNECTION TO A WOLFSON AUDIO CODEC

Wolfson has a range of audio CODEC's, DAC's and ADC's with microphone input interfaces which support the direct connection of the WM7110. As an example, Figure 2 details the connection of the WM7110 to the WM8990 audio CODEC. The same principles can be applied to Wolfson devices which support microphone inputs. Further details on the WM8990 can be obtained from the Wolfson website.


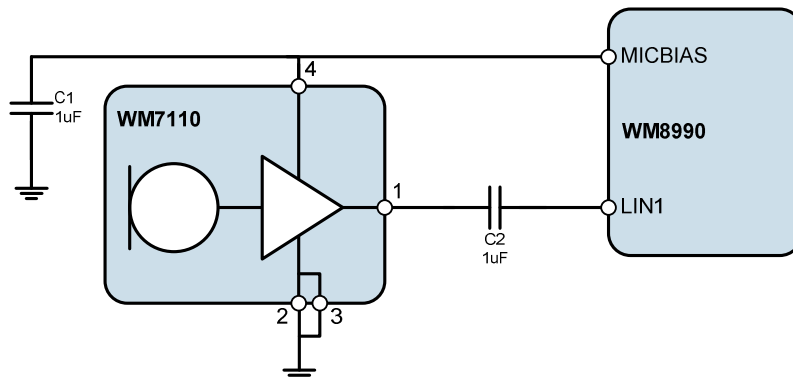


Figure 2 Connection of WM7110 to WM8990

PACKAGE DIMENSIONS

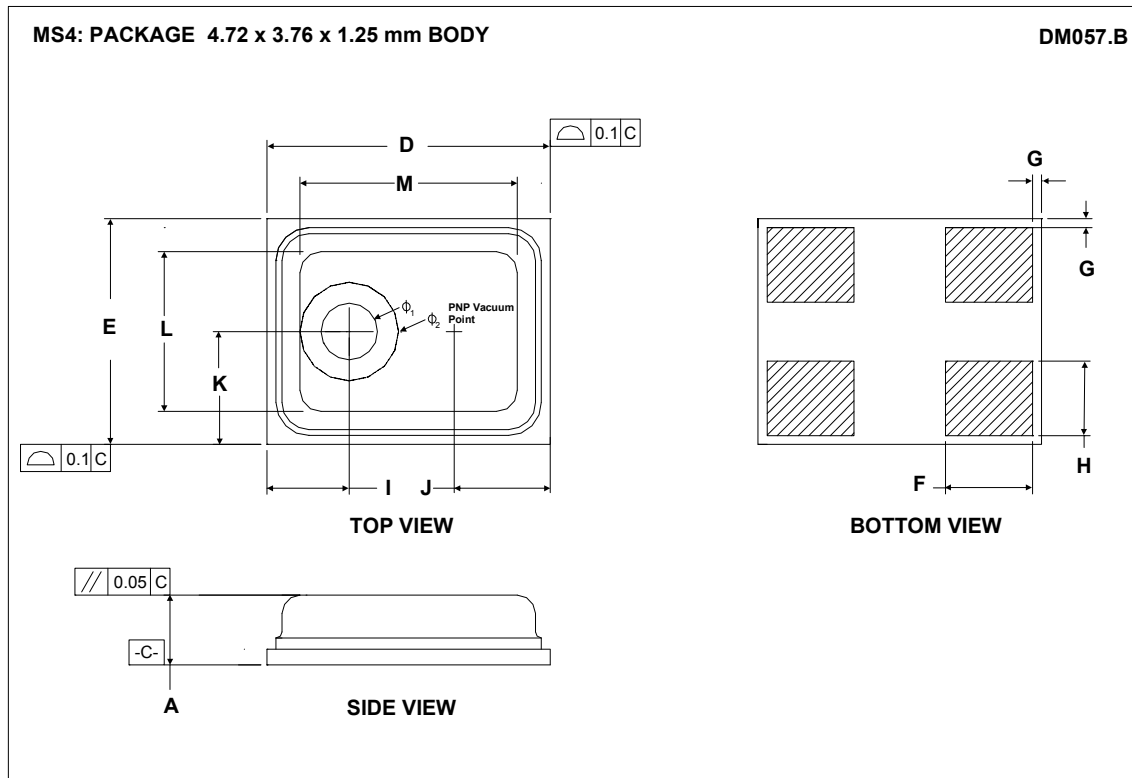


Symbols	Dimensions (mm)			NOTE
	MIN	NOM	MAX	
A	1.15	1.25	1.35	
D	4.62	4.72	4.82	
E	3.66	3.76	3.86	
F	1.30	1.45	1.60	
G		0.15		
H	1.09	1.24	1.39	
K	1.63	1.88	2.13	
I	1.17	1.37	1.57	
J		1.60		
L		2.66		Flat Area
M		3.62		Flat Area
Φ <sub>1</sub>	0.89	0.94	0.99	
Φ <sub>2</sub>		1.64		Gasket Area

- NOTES:
1. THE SEATING PLANE IS REPRESENTED BY PRIMARY DATUM -C-
  2. THE DEVIATION FROM THE SEATING PLANE DUE TO WARPAGE OR TWIST IS SPECIFIED AS MAX 50µm (FLATNESS).
  3. LID SHOULD BE PARALLEL TO THE SEATING PLANE ±50µm.



**RECOMMENDED CUSTOMER LAND PATTERNS**

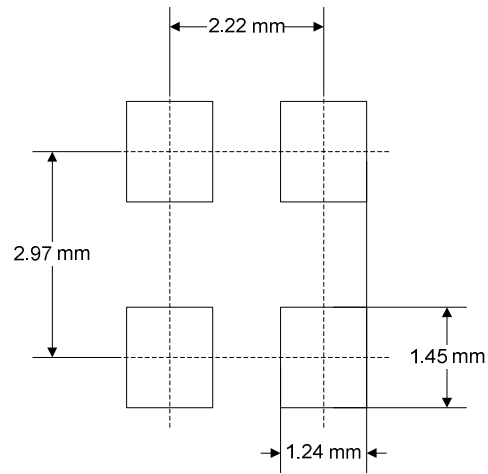

**Figure 3 Recommended Customer PCB Land Pattern**

## IMPORTANT NOTICE

Wolfson Microelectronics plc ("Wolfson") products and services are sold subject to Wolfson's terms and conditions of sale, delivery and payment supplied at the time of order acknowledgement.

Wolfson warrants performance of its products to the specifications in effect at the date of shipment. Wolfson reserves the right to make changes to its products and specifications or to discontinue any product or service without notice. Customers should therefore obtain the latest version of relevant information from Wolfson to verify that the information is current.

Testing and other quality control techniques are utilised to the extent Wolfson deems necessary to support its warranty. Specific testing of all parameters of each device is not necessarily performed unless required by law or regulation.

In order to minimise risks associated with customer applications, the customer must use adequate design and operating safeguards to minimise inherent or procedural hazards. Wolfson is not liable for applications assistance or customer product design. The customer is solely responsible for its selection and use of Wolfson products. Wolfson is not liable for such selection or use nor for use of any circuitry other than circuitry entirely embodied in a Wolfson product.

Wolfson's products are not intended for use in life support systems, appliances, nuclear systems or systems where malfunction can reasonably be expected to result in personal injury, death or severe property or environmental damage. Any use of products by the customer for such purposes is at the customer's own risk.

Wolfson does not grant any licence (express or implied) under any patent right, copyright, mask work right or other intellectual property right of Wolfson covering or relating to any combination, machine, or process in which its products or services might be or are used. Any provision or publication of any third party's products or services does not constitute Wolfson's approval, licence, warranty or endorsement thereof. Any third party trade marks contained in this document belong to the respective third party owner.

Reproduction of information from Wolfson datasheets is permissible only if reproduction is without alteration and is accompanied by all associated copyright, proprietary and other notices (including this notice) and conditions. Wolfson is not liable for any unauthorised alteration of such information or for any reliance placed thereon.

Any representations made, warranties given, and/or liabilities accepted by any person which differ from those contained in this datasheet or in Wolfson's standard terms and conditions of sale, delivery and payment are made, given and/or accepted at that person's own risk. Wolfson is not liable for any such representations, warranties or liabilities or for any reliance placed thereon by any person.

### ADDRESS:

Wolfson Microelectronics plc  
Westfield House  
26 Westfield Road  
Edinburgh  
EH11 2QB

Tel :: +44 (0)131 272 7000

Fax :: +44 (0)131 272 7001

Email :: [sales@wolfsonmicro.com](mailto:sales@wolfsonmicro.com)