


Spezifikation für Freigabe / specification for release

Kunde / customer: _____
 Artikelnummer / part number: **74279245**
 Bezeichnung: **Multilayer-SMD-Ferrit**
 description: **Multilayer-SMD-Ferrite**



DATUM / DATE : 2004-10-11

A Mechanische Abmessungen / dimensions:




| | Größe / size 1806 | |
|---|-------------------|----|
| A | 4,5 ± 0,2 | mm |
| B | 1,6 ± 0,2 | mm |
| C | 1,6 ± 0,2 | mm |
| D | 0,5 ± 0,3 | mm |
| | | |
| | | |
| | | |
| | | |

B Elektrische Eigenschaften / electrical properties:

| Eigenschaften / properties | Testbedingungen / test conditions | | Wert / value | Einheit / unit | tol. |
|--------------------------------|-----------------------------------|-----------------|--------------|----------------|-------------|
| Impedanz / impedance | 100 MHz | Z | 110 | Ω | ±25% |
| Max. Impedanz / max. impedance | 600 MHz | Z | 170 | Ω | typ. |
| DC-Widerstand / DC-resistance | | R _{DC} | 0,035 | Ω | max. |
| Nennstrom / rated current | | I _{DC} | 4.000 | mA | max. |
| | | | | | |

C Lötpad / soldering spec.:



D Prüfgeräte / test equipment:

HP 4396B / HP 16192A für/for Z und/and material
HP 34401 A für/for R_{DC} und/and IDC

E Testbedingungen / test conditions:

Luftfeuchtigkeit / humidity: 33%
 Umgebungstemperatur / temperature: +20°C

F Werkstoffe & Zulassungen / material & approvals:

Basismaterial / base material: Ferrit / ferrite

G Eigenschaften / general specifications:

Lagertemperatur / storage temperature: -20°C - +60°C
 Betriebstemp. / operating temperature: -55°C - +125°C

| | | | | |
|-------------------------------------|--------------------------|------|--------------------------------|--------------|
| Freigabe erteilt / general release: | Kunde / customer | | | |
| | | | | |
| | | | | |
| Datum / date | Unterschrift / signature | | | |
| | Würth Elektronik | SST | RoHS Update | 04-10-11 |
| | | LF | Update 2GHz | 04-01-14 |
| | | JH | Neugestaltung | 00-12-06 |
| Geprüft / checked | Kontrolliert / approved | Name | Änderung / modification | Datum / date |

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.com>


Spezifikation für Freigabe / specification for release

Kunde / customer : _____
 Artikelnummer / part number : **74279245**
 Bezeichnung : **Multilayer-SMD-Ferrit**
 description : **Multilayer-SMD-Ferrite**



DATUM / DATE : 2004-10-11

H Impedanzverlauf / impedance curve:

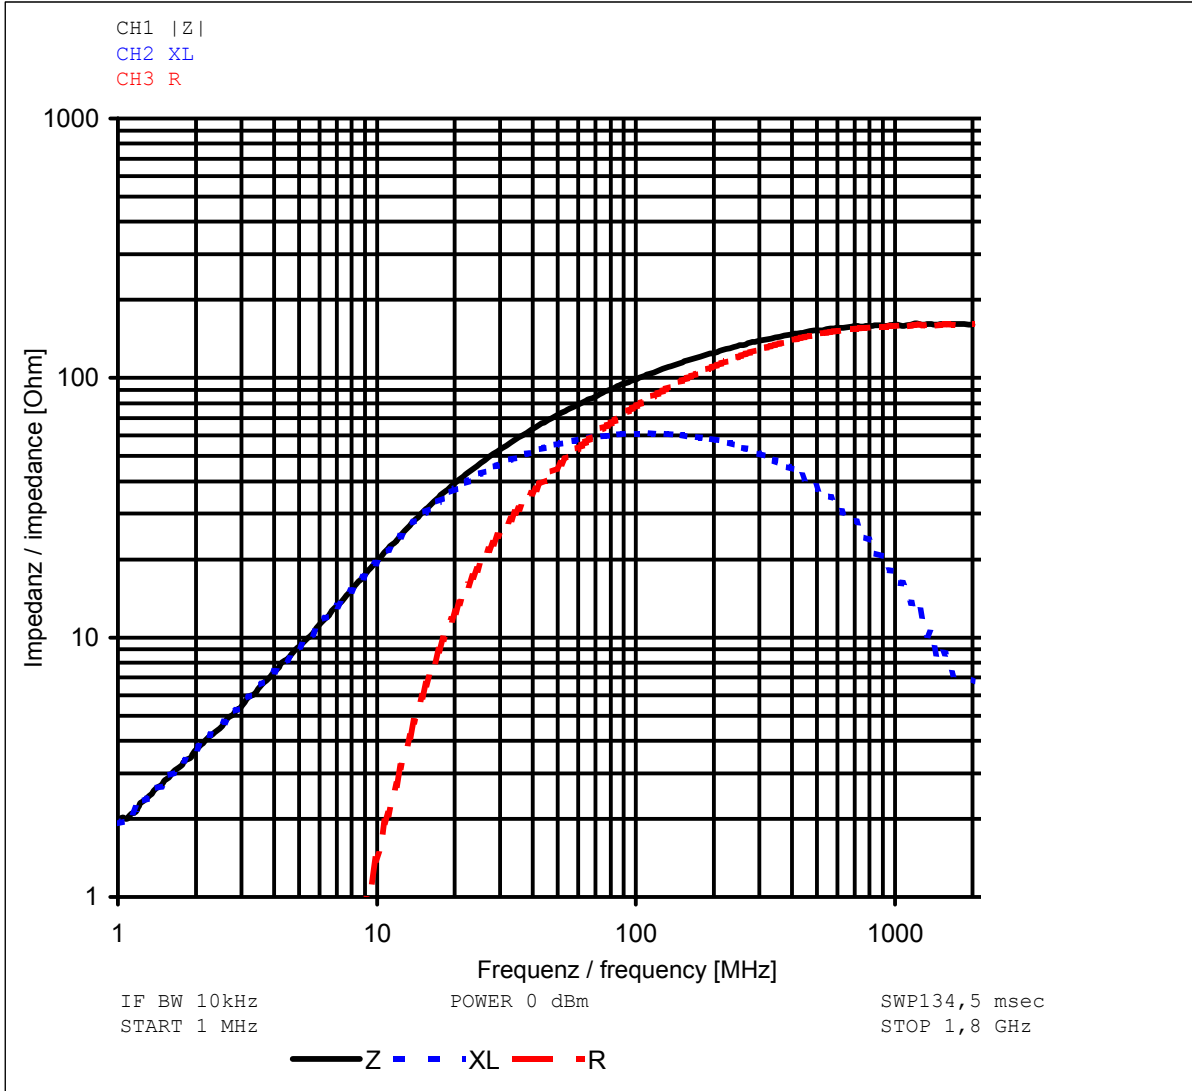

| | | | | |
|-------------------------------------|--------------------------|------|-------------------------|--------------|
| Freigabe erteilt / general release: | Kunde / customer | | | |
| | | | | |
| Datum / date | Unterschrift / signature | | | |
| | Würth Elektronik | SST | RoHS Update | 04-10-11 |
| | | LF | Update 2GHz | 04-01-14 |
| | | JH | Neugestaltung | 00-12-06 |
| Geprüft / checked | Kontrolliert / approved | Name | Änderung / modification | Datum / date |

This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network, where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before use. It is essential to give consideration when to install a protective circuit at the design stage.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.com>