

4


3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
1		PROPOSAL DESIGN	31OCT2018	WY	SZ
2		UPDATE SIGNAL PIN HOLE FROM 1.02 TO 0.72	15NOV2018	WY	SZ

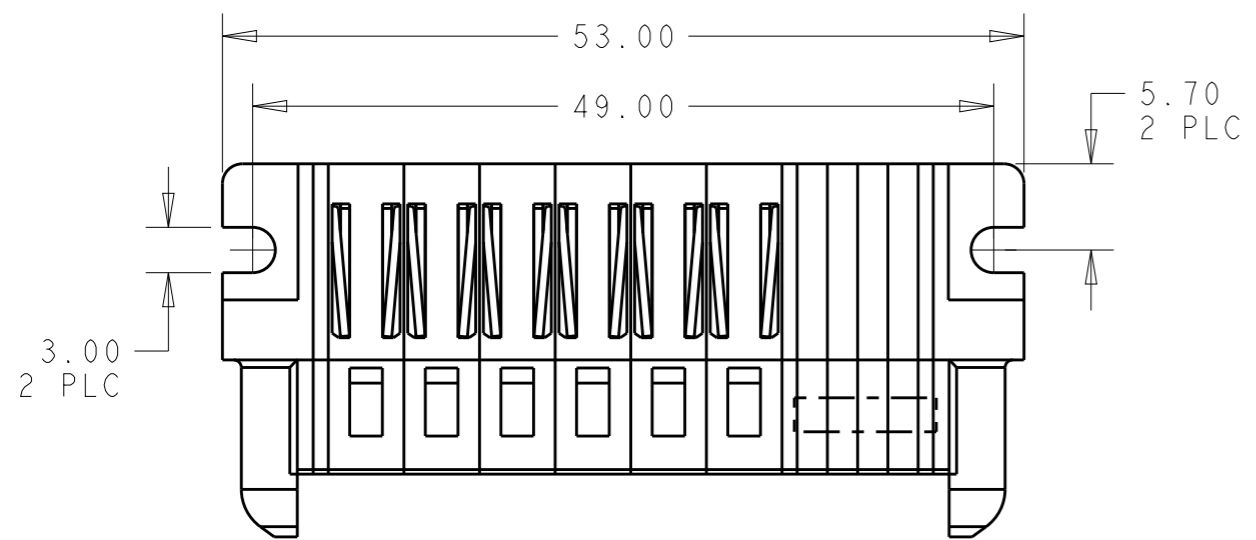

- 1 "TE", PART NUMBER, AND DATECODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL:  
HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-0  
SIGNAL CONTACT - COPPER ALLOY  
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS.
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB - HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 7 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.003 HOLE.

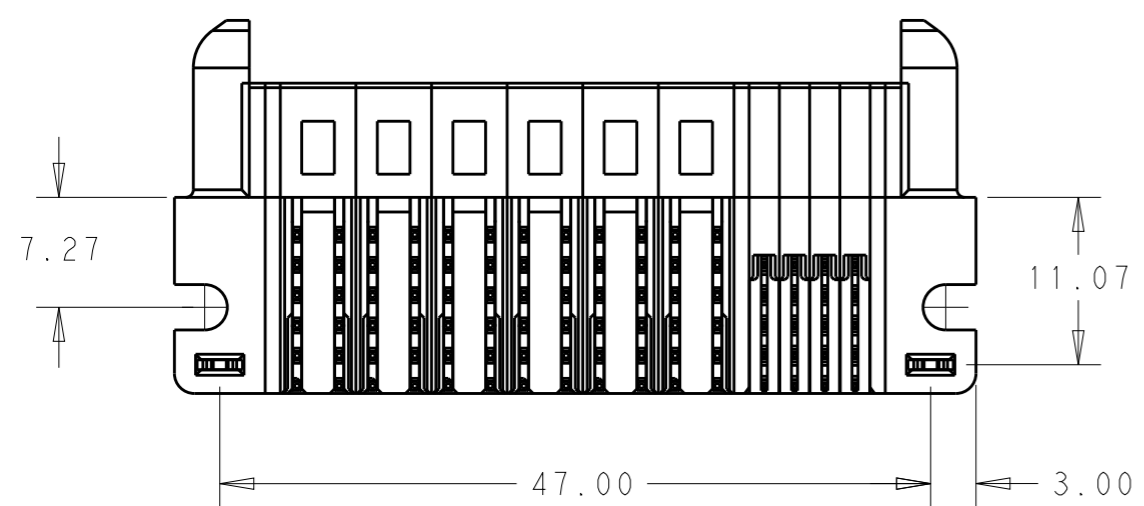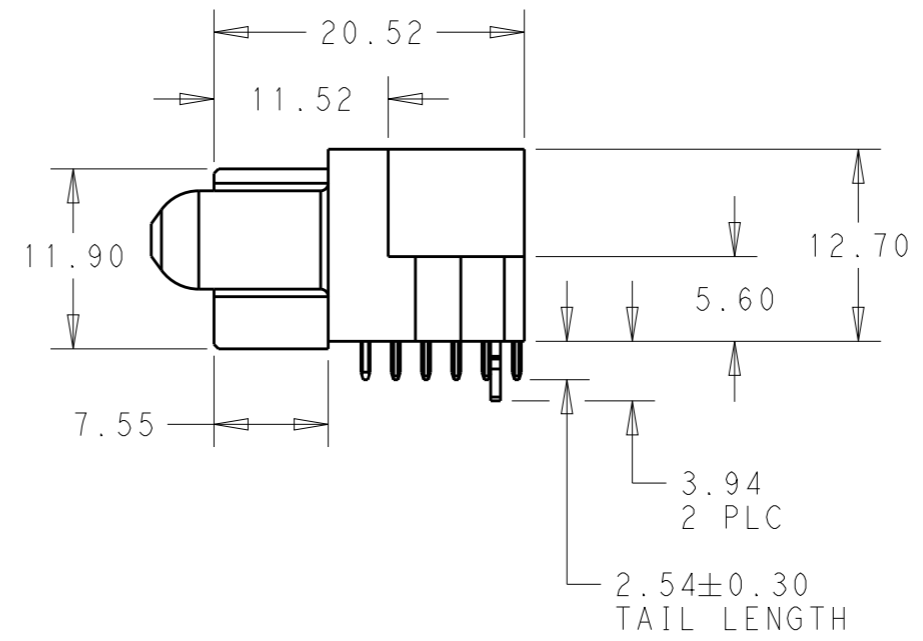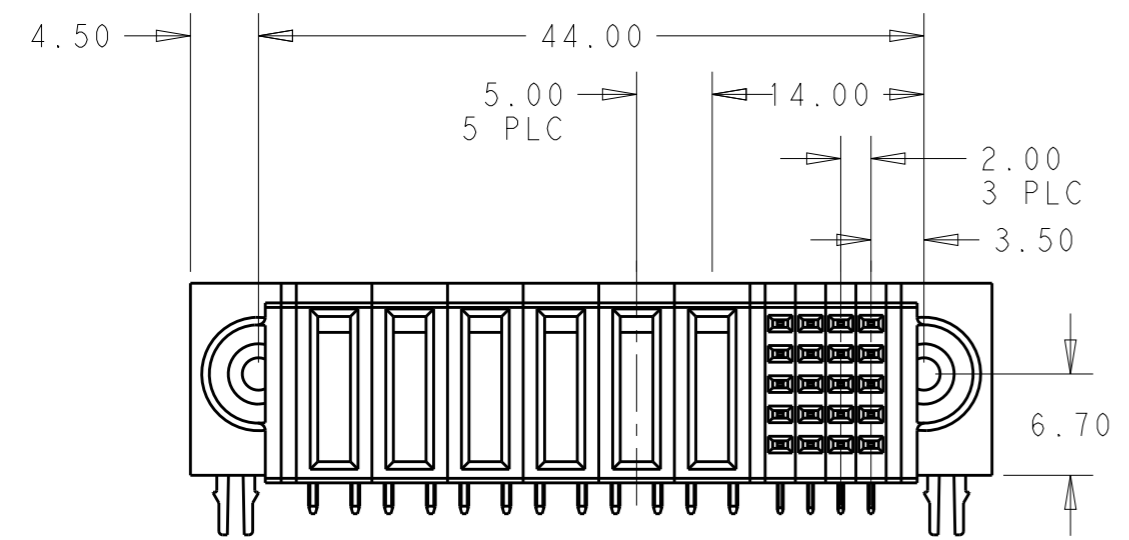


20S + 6P	2334571-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	31OCT2018	<b>STE</b> TE Connectivity	NAME RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS
DIMENSIONS: mm		CHK	31OCT2018		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WY	31OCT2018		
0 PLC ±-		APVD	SZ		
1 PLC ±-		PRODUCT SPEC	-	SIZE	A3
2 PLC ±0.15		APPLICATION SPEC	-	CAGE CODE	00779
3 PLC ±0.05		WEIGHT	-	DRAWING NO	C-2334571-1
4 PLC ±-		CUSTOMER DRAWING	-	RESTRICTED TO	-
ANGLES ±-		SCALE	1:1	SHEET	1 OF 2
FINISH		REV	2		
MATERIAL					
FINISH					

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
		SEE SHEET 1		

PART NUMBER	ROWS	POWER													
		P6	P5	P4	P3	P2	P1	4	3	2	1				
2334571-1	E											V5	V5	V5	V5
	D											V4	V4	V4	V4
	C	RN	RM	RN	RM	RN	RM	RN	RM	RN	RM	V3	V3	V3	V3
	B											V2	V2	V2	V2
	A	HD										V1	V1	V1	V1
20S+6P															

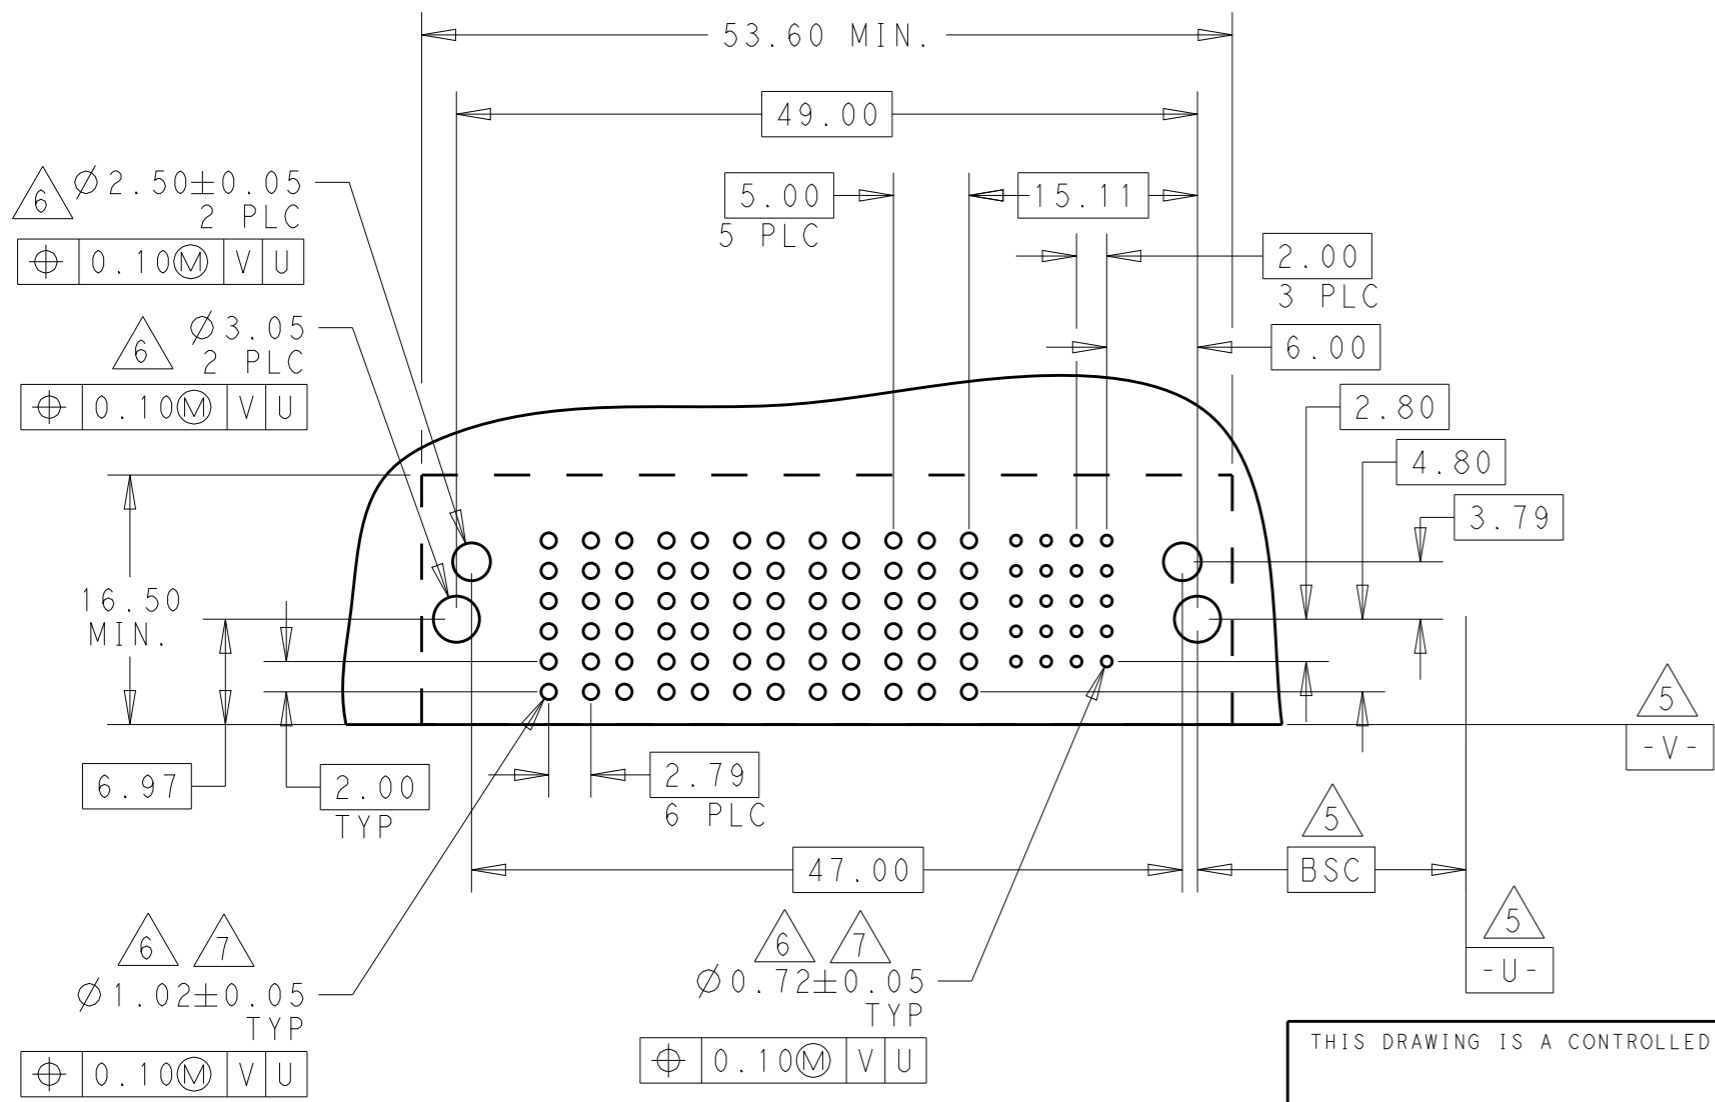

STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW E	V5
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW D	V4
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW C	V3
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW B	V2
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW A	V1
STD SOLDER POWER CONTACT, RIGHT	RN
STD SOLDER POWER CONTACT, LEFT	RM
HOUSING	HOUSING
HOLD DOWN, MULTI-BEAM	HD
DESCRIPTION	IDENTIFIER

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN WY	31OCT2018	<b>STE</b> TE Connectivity
		CHK WY	31OCT2018	
		APVD SZ	31OCT2018	
		PRODUCT SPEC	-	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS
		0 PLC ±- 1 PLC ±- 2 PLC ±0.15 3 PLC ±0.05 4 PLC ±- ANGLES ±-		
MATERIAL		FINISH		SIZE
- 2		- 3		A300779
				CAGE CODE
				©=2334571-1
				DRAWING NO
				RESTRICTED TO
				-
				WEIGHT
				-
				CUSTOMER DRAWING
				SCALE
				1:1
				SHEET
				2 OF 2
				REV
				2