
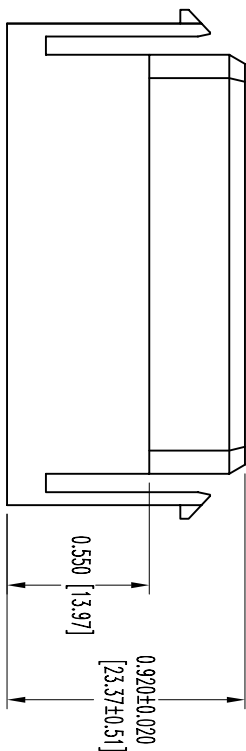



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND ASSUMES ALL LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
4-25-06	NC	ECO 25871		YK	


SK7298

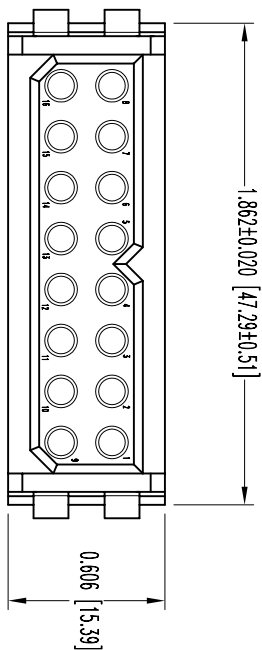

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
 2. ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3d, METHOD A.
WORKING VOLTAGE: 600 VAC.
 3. WORKING TEMPERATURE: -55°C TO +125°C.
 4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
 5. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com



DECIMAL TOL.
± 0.015 [0.38]

PCS SERIES: N.T.S. SCALE: N.T.S. DRAWN BY: YK

TITLE: PJB16F0000/AA

ANGULAR TOL.
± 5°

DATE: 4-25-06

DRAWING NUMBER: SK7298

REV: NC