This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			07/24/08	

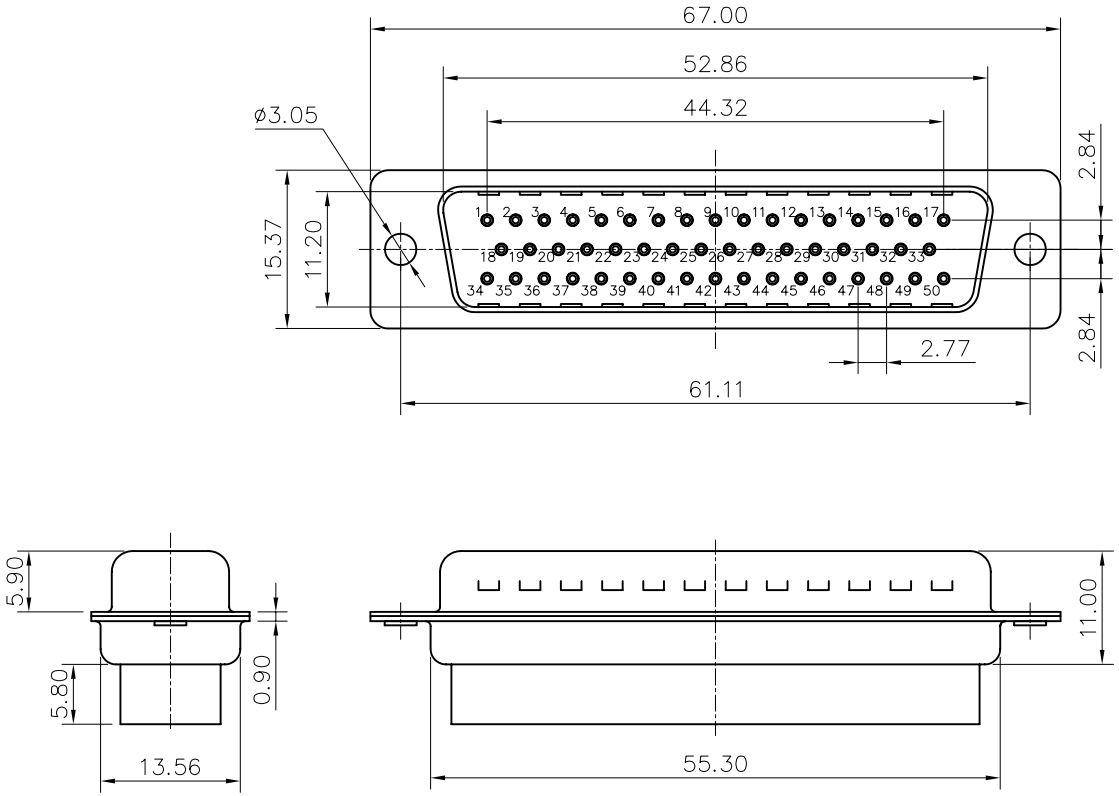

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel

BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0 Color Black

ELECTRICAL : Voltage rating : 500 V RMS at 50 Hz
Insulation resistance >5000 M Ohms

CLIMATIC : Temperature range -55 °C up to 125°C

MARKING : Amphenol-...(Series No.)

PRODUCT CODE

L 777RR D 50 P

- L: RoHS Compliance
- 777: tinned shell + dimples for plug
- Shell Size: D
- Configuration: 50
- Contact type: P: Male

Customer drawing

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.30
.XXX +/-		0.20
FRACTIONS +/-		
ANGLES +/-		5°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS

U.S.	INCHES
METRIC	MM

APPROVAL		DATE
DRAWN	Mary.ma	07/24/08
CHECKED	lili.wang	07/24/08
CHECKED		

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited

TITLE
stamped and formed connector, RR series

SIZE	DRAWING NO.	REV.
A4	C L777RRD50P	1
SCALE	NONE	SHEET 1 OF 1