

PRODUCT FAMILY DATASHEET

OUTDOOR FACADE POLE

Stainless steel wall-luminaires with indirect illumination



AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Special light guide design for low-glare illumination

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP44
- Housing made of Polycarbonate covered with stainless steel
- Available as wall, ceiling and bollard luminaires
- Available with and without motion sensor
- Diffuser made of transparent polycarbonate






TECHNICAL DATA

Product description	Electrical data	Photometrical data	Light technical data	Dimensions & weight				Colors & materials	Temperatures & operating conditions	Lifespan
	Nominal wattage	Luminous flux	Beam angle	Length	Width	Height	Product weight	Product color	Ambient temperature range	Lifespan L70 at 25 °C
O FACADE POLE 6 W 3000 K IP44 SST ¹⁾	6.00 W	360 lm	160 °	138.0 mm	102.0 mm	135.0 mm	470.00 g	Steel	-20...40 °C	30000 h
O FACADE POLE SENSOR 6 W 3000 K IP44 S SST ¹⁾	6.00 W	360 lm	160 °	150.0 mm	102.0 mm	135.0 mm	500.00 g	Steel	-20...40 °C	30000 h

Product description	Additional product data		Capabilities	Certificates & standards			
	Mounting type	Mounting location	Dimmable	Type of protection	Protection class	Protection class IK (shock resistance)	Photobiological safety group
O FACADE POLE 6 W 3000 K IP44 SST ¹⁾	Surface	Wall	No	IP44	II	IK06	RG 0
O FACADE POLE SENSOR 6 W 3000 K IP44 S SST ¹⁾	Surface	Wall	No	IP44	II	IK06	RG 0

Product description	Standards
O FACADE POLE 6 W 3000 K IP44 SST ¹⁾	CE
O FACADE POLE SENSOR 6 W 3000 K IP44 S SST ¹⁾	CE

¹⁾ Available from February 2018

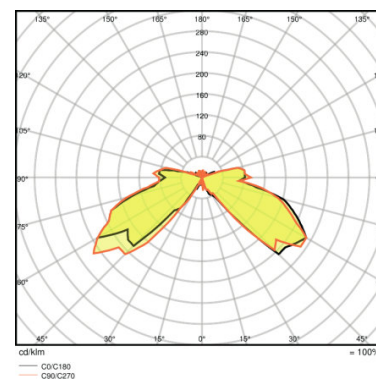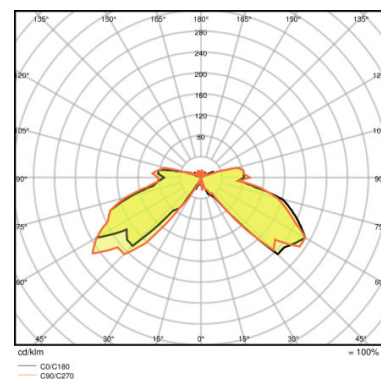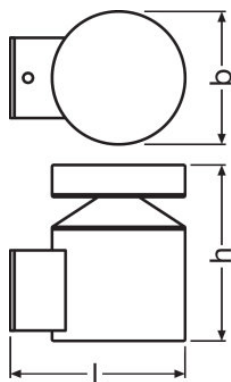

O FACADE POLE 6 W 3000 K IP44 SST

O FACADE POLE 6 W 3000 K IP44 SST

O FACADE POLE SENSOR 6 W 3000 K IP44 S SST

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075075092	O FACADE POLE 6 W 3000 K IP44 SST	Shipping carton box 6	380 mm x 175 mm x 320 mm	21.28 dm ³	3291.00 g
4058075075115	O FACADE POLE SENSOR 6 W 3000 K IP44 S SST	Shipping carton box 6	380 mm x 175 mm x 320 mm	21.28 dm ³	3471.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.