
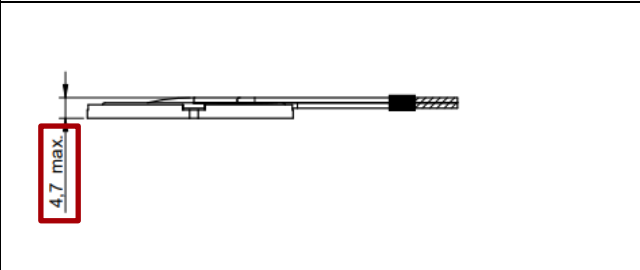
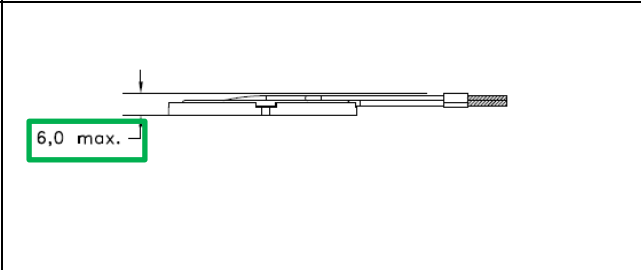
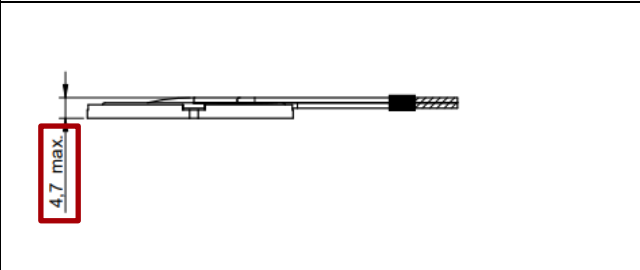
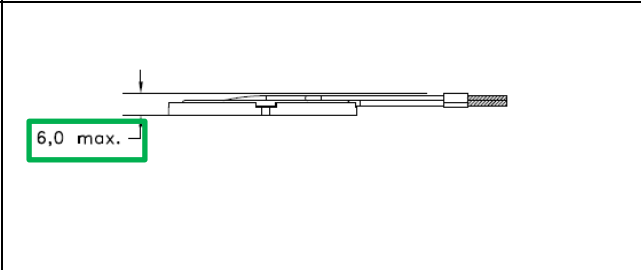
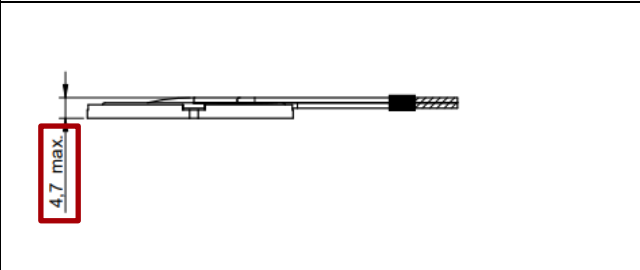


Product / Process Change Notification (PCN)					
<input checked="" type="checkbox"/> Major change <input type="checkbox"/> Minor change					
<p>PCN #: PCN_UtWPCC-Tx_20240108</p> <p>Affected Series: WE-WPCC-Tx; 760308100111</p> <p>PCN Date: December 08, 2023</p> <p>Effective Date: January 08, 2024</p>	<p>Change Category:</p> <input type="checkbox"/> Equipment / Location <input checked="" type="checkbox"/> General Data <input checked="" type="checkbox"/> Material <input checked="" type="checkbox"/> Process <input checked="" type="checkbox"/> Product Design <input type="checkbox"/> Shipping / Packaging <input type="checkbox"/> Supplier <input type="checkbox"/> Software				
<p>Contact: Product Management</p> <p>Phone: +49 (0) 7942 - 945 5001</p> <p>Fax: +49 (0) 7942 - 945 5179</p> <p>E-Mail: pcn.eisos@we-online.com</p>	<p>Data Sheet Change: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Attachment: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No</p>				
<p>Description and purpose of change:</p> <p>As a datasheet information amendment, Würth Elektronik will update the DC resistance specification. In addition to improve processability, a PET film was added below the coil and height specification will be adjusted.</p> <p>There will be no change in quality or reliability of the product.</p>					
<p>Detail of Change:</p> <p>The height specification will be updated</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; padding: 5px;">From</th> <th style="width: 50%; padding: 5px;">To</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 10px;">  </td> <td style="text-align: center; padding: 10px;">  </td> </tr> </tbody> </table>		From	To		
From	To				
					
<p>The DC resistance specification will be updated</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; padding: 5px;">From</th> <th style="width: 50%; padding: 5px;">To</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 10px;"> <div style="border: 1px solid red; padding: 2px; display: inline-block;">48 mΩ max</div> </td> <td style="text-align: center; padding: 10px;"> <div style="border: 1px solid green; padding: 2px; display: inline-block;">51 mΩ max</div> </td> </tr> </tbody> </table>		From	To	<div style="border: 1px solid red; padding: 2px; display: inline-block;">48 mΩ max</div>	<div style="border: 1px solid green; padding: 2px; display: inline-block;">51 mΩ max</div>
From	To				
<div style="border: 1px solid red; padding: 2px; display: inline-block;">48 mΩ max</div>	<div style="border: 1px solid green; padding: 2px; display: inline-block;">51 mΩ max</div>				

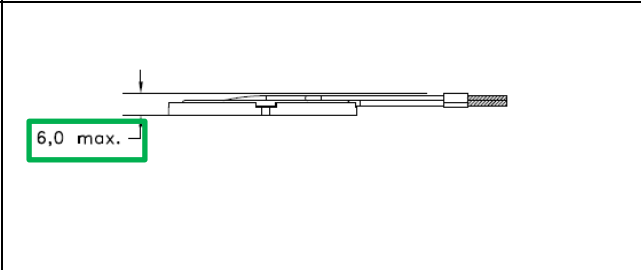

Reliability / Qualification Summary:

Product approval is according to the specification criteria and is internally released by the Product Management Department.