


Crimp Housing

Wire To Board

multicomp^{PRO}

RoHS
Compliant



Crimp Terminal

Features

- Secure locking structure
- Contact lock structure
- Prevents accidental mismating
- Ensures a reliable connection
- Double rows system




Specifications

Current Rating	: 3A AC/DC
Voltage Rating	: 250V AC/DC
Contact Resistance	: 20mΩ Max.
Insulation Resistance	: 1000MΩ Min.
Withstanding Voltage	: 1000V AC For One Minute
Operating Temperature Range	: -25°C to +85°C

Material

Insulator	: Nylon 66 (UL94V-0)
Insulator Colour	: White

Diagram

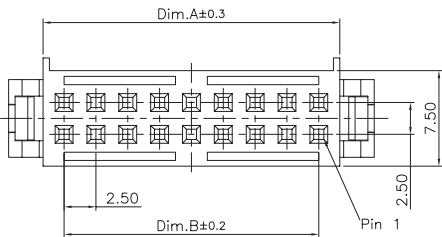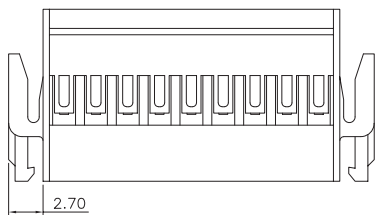

Dimension information

Circuits	Dia.A	Dia.B
8	10.8	7.5
10	13.3	10
12	15.8	12.5
14	18.3	15
16	20.8	17.5
18	23.3	20
20	25.8	22.5

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp^{PRO}

Part Number Table

Description	Ways	Part Number
Crimp Housing, Two Rows, 2.5mm	8	MP015430
	10	MP015431
	12	MP015432
	14	MP015433
	16	MP015434
	18	MP015435
	20	MP015436
Crimp Terminal Contact, 2.5mm		MP015437

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.