

Datasheet - SRB 402EM-24V

Output expanders / SRB 402EM



- Expander module for contact expansion
- 4 safety contacts, STOP 0
- 2 Signalling outputs

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	SRB 402EM-24V
Article number	1175611
EAN code	4030661307909

Approval

Approval




Classification

Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e (STOP 0)
Control category	up 4 (STOP 0)
DC	99% (STOP 0)
CCF	> 65 points
PFH value	≤ 2,0.0 x 10 ⁻⁸ /h (STOP 0)
- notice	up to max. 36500 switching cycles/year and at max. 60% contact load
SIL	up 3 (STOP 0)
Mission time	20 Years
- notice	

K	n-op/y	t-cycle
20 %	525.600	1,0 min
40 %	210.240	2,5 min
60 %	75.087	7,0 min
80 %	30.918	17,0 min
100 %	12.223	43,0 min

Global Properties

Product name	SRB 402EM
Standards	EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-78
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	, self-cleaning, positive action
Weight	250 g
Start conditions	Automatic
Start input (Y/N)	No
Feedback circuit (Y/N)	Yes
Start-up test (Y/N)	No
Reset after disconnection of supply voltage (Y/N)	No
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	No
Pull-in delay	
- ON delay with automatic start	30 ms
Drop-out delay	
- Drop-out delay in case of emergency stop	≤ 35 ms

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	0,25 mm ²
- Max. Cable section	2.5 mm ²
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	Yes
Mechanical life	10.000.000 operations
Electrical lifetime	Derating curve available on request
Resistance to shock	30 g / 11 ms
Resistance to vibration To EN 60068-2-6	10...55 Hz, Amplitude 0,35 mm, ± 15 %

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+45 °C
Storage and transport temperature	
- Min. Storage and transport temperature	-40 °C
- Max. Storage and transport temperature	+85 °C
Protection class	
- Protection class-Enclosure	IP40

- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U_{imp}	4 kV
- Overvoltage category	III To VDE 0110
- Degree of pollution	2 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating	conforming to EMC Directive
------------	-----------------------------

Electrical data

Rated DC voltage for controls	
- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	28.8 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	20.4 V
- Max. rated AC voltage for controls, 50 Hz	26.4 V
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	20.4 V
- Max. rated AC voltage for controls, 60 Hz	26.4 V
Contact resistance	max. 100 m Ω
Power consumption	1.0 W; 1.0 VA
Type of actuation	AC/DC
Rated operating voltage U_e	24 VDC -15% / $+20\%$, residual ripple max. 10%; 24 VAC -15% / $+10\%$
Operating current I_e	0,05 A
Frequency range	50 / 60 Hz
Electronic protection (Y/N)	No
Fuse rating for the operating voltage	1.0 A slow blow

Inputs

Monitored inputs

- Short-circuit recognition (Y/N)	No
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	0 piece
Number of openers	1 piece
Cable length	1500 m with 1.5 mm ² ; 2500 m with 2.5 mm ² (for Rated voltage)
Conduction resistance	max. 40 Ω

Outputs

Stop category	0
Number of safety contacts	4 piece
Number of auxiliary contacts	2 piece
Number of signalling outputs	0 piece
Switching capacity	
- Switching capacity of the safety contacts	max. 250 VAC, 6 A ohmic (inductive in case of appropriate protective wiring)
- Switching capacity of the auxiliary contacts	24 VDC, 2 A
Fuse rating	

- Protection of the safety contacts	6 A gG D-fuse
- Fuse rating for the auxiliary contacts	2 A slow blow
Utilisation category To EN 60947-5-1	depending on the connected safety relay module
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	2 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	4 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	1 piece
LED switching conditions display	
- The integrated LEDs indicate the following operating states.	
- Position relay K1/K2	

Miscellaneous data

Applications



Output expanders
depending on the connected safety relay module

Dimensions

Dimensions	
- Width	22.5 mm
- Height	100 mm
- Depth	121 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

Relay outputs: 1-channel control of the expander module is suitable for contact reinforcement or multiplication of the connected safety relay module.

Terminals X1 and X2 of the expander module must be connected to the feedback circuit or reset circuit of the safety relay module.

The wiring diagram shows the control of the expander module by a SRB... safety relay module with the guard doors closed and in de-energised condition.

Documents

Operating instructions and Declaration of conformity (jp) 559 kB, 29.03.2011

http://127.0.0.1/Bilddata/Si_baust/Pdf/srb402em/bedien/jp/mrl_srb_402em_jp.pdf

Operating instructions and Declaration of conformity (es) 535 kB, 08.02.2011
http://127.0.0.1/Bilddata/Si_baust/Pdf/srb402em/bedien/es/mrl_srb_402em_es.pdf

Operating instructions and Declaration of conformity (it) 528 kB, 08.02.2011
http://127.0.0.1/Bilddata/Si_baust/Pdf/srb402em/bedien/it/mrl_srb_402em_it.pdf


Operating instructions and Declaration of conformity (nl) 529 kB, 08.02.2011
http://127.0.0.1/Bilddata/Si_baust/Pdf/srb402em/bedien/nl/mrl_srb_402em_nl.pdf

Operating instructions and Declaration of conformity (en) 706 kB, 21.01.2010
http://127.0.0.1/Bilddata/Si_baust/Pdf/srb402em/bedien/EN/mrl_srb_402em_en.pdf

Operating instructions and Declaration of conformity (de) 919 kB, 05.07.2010
http://127.0.0.1/Bilddata/Si_baust/Pdf/srb402em/bedien/DE/mrl_srb_402em_de.pdf

Wiring example (99) 15 kB, 04.08.2008
http://127.0.0.1/Bilddata/Si_baust/srb402em/schaltun/ksrb4l02.pdf

Images

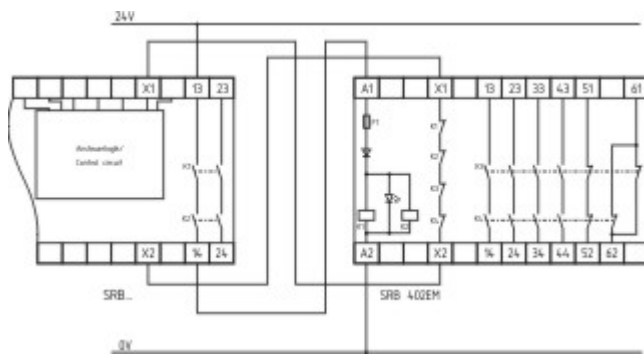

Wiring example
