


**MICROSERIES
MAS PT100 0...100C**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

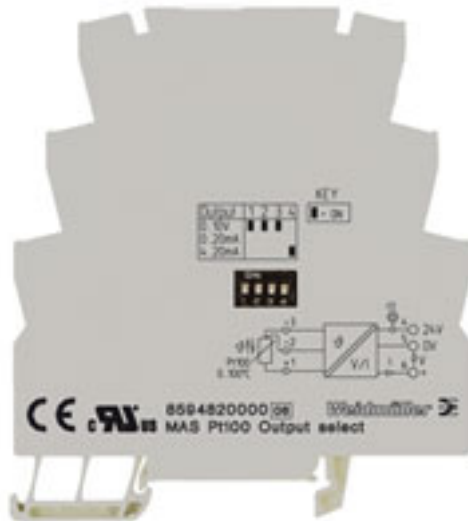

The MAS/MAZ PT100 signal isolating converters are built into a compact 6.1 mm MICROSERIES housing.

2/3-wire PT100 sensors can be connected on the input side. Calibrated DC current/voltage signals are available on the output. They can be selected using the DIP switches.
 The signal isolating converters are designed with a two-way isolation of 0.5 kV between the input and output.
 The 24 VDC power is supplied over the output circuit.

The converters are available with either screw or tension-clamp wire connection. The MI-A-PSM 24 VDC power supply module can be used with ZQV4N jumpers to cross-connect the 24 VDC supply voltage.
 International approvals (such as ATEX Zone 2 and cULusEX C1D2) allow you to use this signal isolating converter in explosion-risk zones.

General ordering data

Order No.	8594820000
Type	MAS PT100 0...100C
Version	MICROSERIES, RTD isolating transformer
GTIN (EAN)	4032248252459
Qty.	1 pc(s).

**MICROSERIES
MAS PT100 0...100C**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Technical data
Dimensions

Length	88 mm	Width	6.1 mm
Height	97.8 mm		

Temperatures

Operating temperature	0 °C...+55 °C	Storage temperature	-20 °C...+85 °C
-----------------------	---------------	---------------------	-----------------

Probability of failure

MTTF	354 Years
------	-----------

Input

Sensor supply	0.8 mA	Number of inputs	1
Temperature input range	0...100 °C	Sensor	PT100/2-/3-wire (in compliance with IEC 751)

Output

load impedance voltage	≥ 10 kΩ	Number of outputs	1
load impedance current	≤ 400 Ω @ 24 V	Output voltage, note	0...10V / 0...5V
Output current	0(4)...20 mA		

General data

Accuracy	< 0.5 % of measuring range	Current-carrying capacity of cross-connect.	≤ 20 A
Galvanic isolation	2-way isolator	Input/Output	PT100/ 0(4)...20 mA, 0...10 V, 0...5V
Linearity	Yes	Mounting rail	TS 35
Power consumption	ca. 0.6 W	Step response time	< 0.7 s
Supply voltage	24 V DC ± 10 %	Temperature coefficient	≤ 250 ppm/K of final value
Type of connection	Screw connection		

Insulation coordination

Clearance & creepage distances	≥ 1.5 mm	EMC standards	EN 55011, EN 61000-6 /-2, EN 61326
Impulse withstand voltage	1.5 kV	Insulation voltage	500 V _{eff} / 1 s
Insulation voltage input or output/rail	500 V _{eff}	Insulation voltage input or output/supply	500 V _{eff}
Pollution severity	2	Rated voltage	100 V
Standards	DIN EN 50178, DIN EN 61000-4-2	Surge voltage category	III

Classifications

UNSPSC	30-21-18-01	eClass 5.1	27-20-02-06
eClass 6.0	27-20-02-06		

Approvals

Approvals	CE; CULUS; GOSTME25
-----------	---------------------

Datasheet

**MICROSERIES
MAS PT100 0...100C**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings

Electric symbol

