


Single Row Terminal Blocks

Kulka® 599 Series

150 Volts

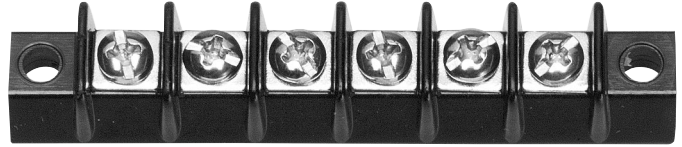

Specifications:

- Base, Phenolic, 150° C
- Open Back Design (Insulator Strip Required for Voltage Rating)
- JJ (GDI-30F) Material Available
- Screws, #5-40 Binder Head, Phil-Slot
- Terminals, Plated Brass
- 1-30 Poles
- 3/8" Centers
- Wire Range With Wire Binding Screw #16-#22 Awg – 15 Amps
- The Suitability Of These Devices For Greater Currents Shall Be Determined In The End-Use Application
- UL Recognized File No. E47811
- CSA Certified File No. LR19766
- CE

Catalog Description	Number of Poles	Dimensions	
		A	B
599 GP 01	1	1.03	0.75
599 GP 02	2	1.41	1.12
599 GP 03	3	1.78	1.50
599 GP 04	4	2.16	1.88
599 GP 05	5	2.53	2.25
599 GP 06	6	2.91	2.63
599 GP 07	7	3.28	3.00
599 GP 08	8	3.66	3.38
599 GP 09	9	4.03	3.75
599 GP 10	10	4.41	4.13
599 GP 11	11	4.78	4.50
599 GP 12	12	5.16	4.88
599 GP 13	13	5.53	5.25
599 GP 14	14	5.91	5.63
599 GP 15	15	6.28	6.00
599 GP 16	16	6.66	6.38
599 GP 17	17	7.03	6.75
599 GP 18	18	7.41	7.13
599 GP 19	19	7.78	7.50
599 GP 20	20	8.16	7.88
599 GP 21	21	8.53	8.25
599 GP 22	22	8.91	8.63
599 GP 23	23	9.28	9.00
599 GP 24	24	9.66	9.38
599 GP 25	25	10.03	9.75
599 GP 26	26	10.41	10.13
599 GP 27	27	10.78	10.50
599 GP 28	28	11.16	10.88
599 GP 29	29	11.53	11.25
599 GP 30	30	11.91	11.63

MM=Dim X 25.4

Hardware Options:

KT 28	=	Full Quick Connect (0° Flat)	See Page 87
KT 29	=	Full Quick Connect (45° Bend)	See Page 87
KT 30	=	Full Quick Connect (90° Bend)	See Page 87
J 600	=	Line to Line Jumper	See Page 91
600 RJ(S)	=	Multiple Position Jumper	See Page 91
3/4 ST	=	Half Solder	See Page 89
KT 34	=	Half Quick Connect (0° Flat)	See Page 87
KT 35	=	Half Quick Connect (45° Bend)	See Page 87
KT 36	=	Half Quick Connect (90° Bend)	See Page 87
Z	=	Lug Over the Side (.312)	See Page 90
2002	=	Stud	See Page 93
2004	=	Feed Thru Solder	See Page 93
2020	=	Solder Pin	See Page 93
2021	=	Solder Pin	See Page 93

