


Surface Mount Zener Diode

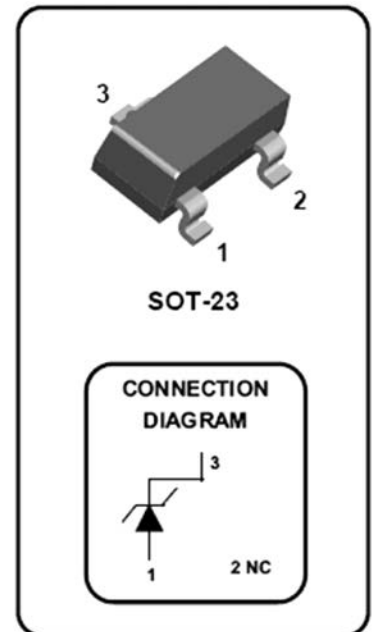

Features:

- Planar Die Construction
- 350mW Power Dissipation
- General Purpose, Medium Current
- Ideally Suited for Automated Assembly Processes

Application:

350mW Surface mount zener diode

Maximum Rating @ TA = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Forward voltage @ $I_F = 10\text{mA}$	V_F	0.9	V
Power dissipation	P_d	350	mW
Thermal resistance, junction to ambient air	$R_{\theta jA}$	357	°C/W
Operating and storage temperature range	T_j, T_{stg}	-65 to +150	°C

Note : Valid provided that device terminals are kept at ambient temperature.
Tested with pulses, $T_p \leq 1\text{ms}$.

Electrical Characteristics @ TA = 25°C unless otherwise specified

Type Number	Marking Code	Zener Voltage Range				Maximum Zener Impedance		Maximum Reverse Leakage Current	
		$V_z @ I_{ZT}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK} = 0.25\text{mA}$	I_R	@ V_R
		Nom(V)	Min(V)	Max(V)	(mA)	(Ω)		(μA)	(V)
MMBZ5226B	KG1	3.3	3.14	3.47	20	28	1,600	25	1



Surface Mount Zener Diode



Typical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified


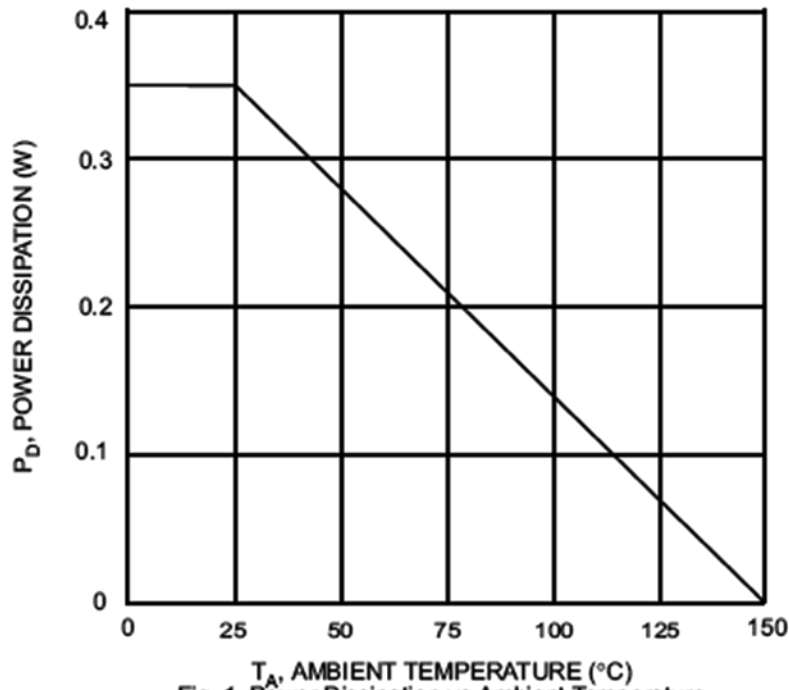


Fig. 1 Power Dissipation vs Ambient Temperature

Package Outline

Plastic surface mounted package

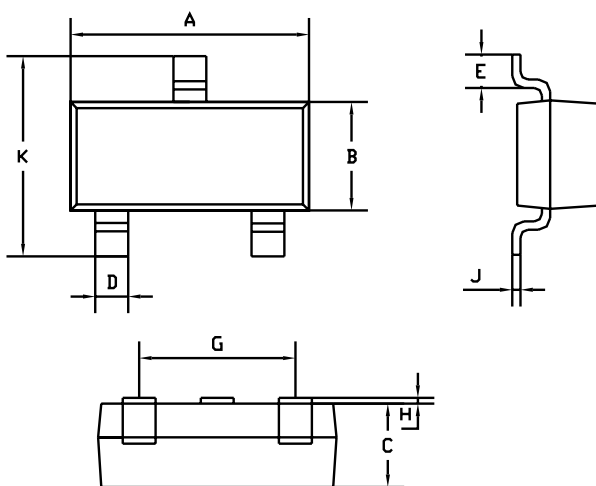


SOT-23		
Dim	Min	Max
A	2.85	2.95
B	1.25	1.35
C	1 Typical	
D	0.37	0.43
E	0.35	0.48
G	1.85	1.95
H	0.02	0.1
J	0.1 Typical	
K	2.35	2.45
All Dimensions in mm		



Surface Mount Zener Diode



Soldering Footprint

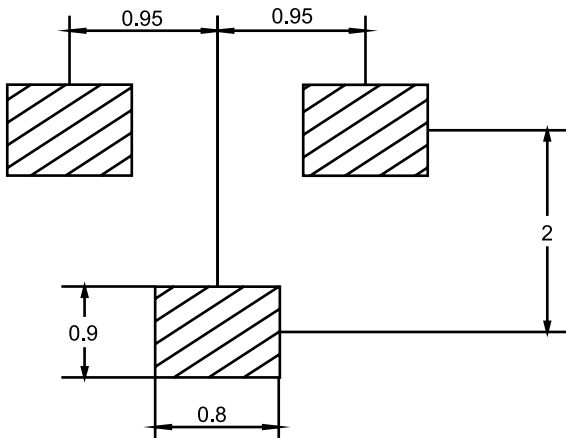

Dimensions : Millimetres

Package Information

Device	Package	Shipping
MMBZ5226B-7-F	SOT-23	3,000/Tape & Reel

Part Number Table

Description	Part Number
350mW Surface Mount Zener Diode	MMBZ5226B-7-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

