

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Sensor/actuator connector, female, straight, 5-pos., M12, shielded, A-coded, screw connection, metal knurl, cable screw connection Pg9

The illustration shows the 4-pos. version

Why buy this product

- Safe use in the field, thanks to a high degree of protection
- Flexible: connectors for on-site assembly
- Screw connection: proven connection technology for a large selection of different conductors
- Mariable signal transmission 360° shielding in environments with electromagnetic interference



Key commercial data

Packing unit	1 pc
GTIN	4 017918 181314
Weight per Piece (excluding packing)	48.54 g
Custom tariff number	85366990
Country of origin	Germany
Product key	BF2CBA

Technical data

Dimensions

External diameter	6 mm 8 mm
Stripping length of the sheath	35 mm
Stripping length of the individual wire	5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C 85 °C (Plug / socket)		
Degree of protection	IP67		

General

Rated current at 40°C	4 A
-----------------------	-----



Technical data

General

Rated voltage	60 V			
Number of positions	5			
Contact resistance	\leq 3 m Ω			
Insulation resistance	\geq 100 M Ω			
Coding	A - standard			
Standards/regulations	M12 connector IEC 61076-2-101			
Status display	No			
Surge voltage category	II			
Pollution degree	3			
Connection method	Screw connection			
Conductor cross section	0.25 mm² 0.75 mm²			
AWG conductor cross section	24 18			
Insertion/withdrawal cycles	≥ 100			
Torque	0.4 Nm (M12 knurl)			
	0.2 Nm (Screw terminal blocks)			
	0.8 Nm 1 Nm (Pressure nut with coupling sleeve)			
Tightening torque	Screw plug insert with sleeve housing as far it will go			
Assembly instructions	The wires can be connected both with ferrules and without ferrules			

Material

Inflammability class according to UL 94	НВ
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Nickel-plated brass
Sealing material	NBR

Classifications

eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCI@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27449001

ETIM

ETIM 2.0	EC001121
----------	----------



Classifications

_	_			
_		ı	n	Л
ᆮ		ı	ı١	V١

ETIM 3.0	EC002062
ETIM 4.0	EC002062
ETIM 5.0	EC002062

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Α	n	n	ro	v	a	ls

Approvals

GOST / GOST / UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details





UL Recognized 51			
Nominal current IN	4 A		
Nominal voltage UN	60 V		



Approvals

cUL Recognized		
Nominal current IN	4 A	
Nominal voltage UN	60 V	

cULus Recognized CALUS		

Drawings

Schematic diagram




Schematic diagram



Cable connection side M12 (screw connection)

Pin assignment M12 socket, 5-pos., A-coded, socket side view


Dimensioned drawing




M12 x 1 socket, straight, shielded



Functional drawing

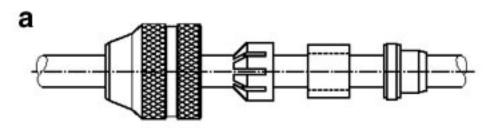

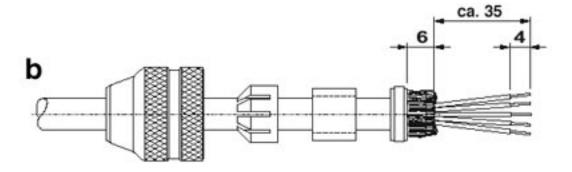

Assembly steps for M12 male/female plug and conductor

a = Slide on parts

b= Strip conductor, widen shield and lay around the shielding ring, cut off projecting mesh. Slide cores through the housing. Mount shielding ring, gasket and clamping cage. Tighten pressure screw to fix the cable. Screw down cores. Mount male/female part. Tighten pressure screw.

Phoenix Contact 2014 © - all rights reserved http://www.phoenixcontact.com