### Surface Mount Resistor Kit 1206 Case Size MU

# multicomp



### RoHS Compliant

#### **Specifications Table**


Туре	Power Rating	Resistance Tolerance	Nominal Resistance
MC 1206	0.125W (1/8W)	±5%	10Ω

#### **Ratings:**

Туре	MC 1206
Power Rating	0.125W (1/8W)
Rated Current(Jumper)	2A
Max. Overload Current(Jumper)	10A
Max. Working Voltage	500V
Max. Overload Voltage	200V
Dielectric Withstanding Voltage	400V
Temperature Range	-55°C +155°C
Ambient Temperature	+70°C

#### **Power Rating:**

Resistors shall have a power rating based on continuous load operation at an ambient temperature of 70°C . For temperature in excess of 70°C, The load shall be derate as shown in figure.

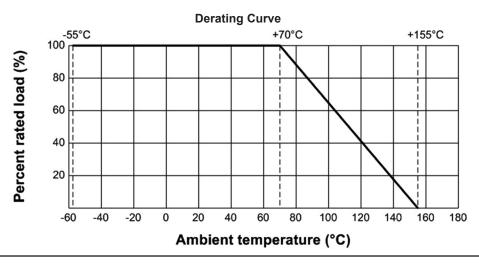





## Surface Mount Resistor Kit 1206 Case Size **multicomp**

#### Nominal Resistance:

Effective figures of nominal resistance shall be in accordance with E-24 and E-96 series E-96 series for 1 % and E-24 series for 2 % and 5 %

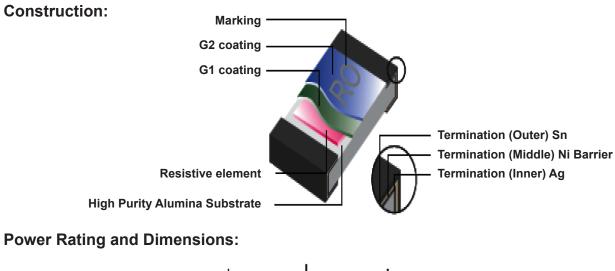

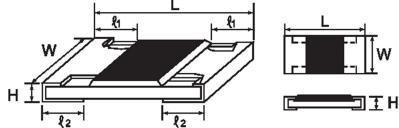

#### **Dimension**:

-	Dimension (mm)				
Туре	L ± 0.15	W +0.15 / -0.10	H ±0.1	ℓ1 ± 0.2	ℓ2 ± 0.2
MC 1206	3.1	1.55	0.55	0.45	0.45

#### **Power Rating :**

Туре	Power Rating	Tolerance	Resistance	Standard Series
MC 1206 0.125W (1/8W)	0.105\A((1/9\A))	Jumper	< 50mΩ	F 12
	0.12500 (1/600)	±5	10Ω ~ 1MΩ	E-12



#### **Performance Specification :**

Characteristics	Limits	Test Methods (JIS C 5201-1)	
Insulation resistance	1,000 $M\Omega$ or more	Apply 500V DC between protective coating and termination for 1 min, then measure	
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down	Apply 300V AC between protective coating and termination for 1 minute	
Temperature coefficient	1Ω - 10Ω : ± 400 PPM/°C 11Ω - 100Ω : ± 200 PPM/°C >100Ω : ± 100 PPM/°C	Natural resistance change per temp. degree centigrade. $\begin{array}{c} R_2 - R_1 \\ \hline R_1(t_2 - t_1) \end{array} \times 10^6  (PPM/^{\circ}C) \\ R_1: Resistance value at room temperature (t1) \\ R_2: Resistance value at room temp. plus 100^{\circ}C (t2) \end{array}$	
Short time overload	Resistance change rate is ± (2.0% + 0.1Ω) Max.	Permanent resistance change after the application of a poten- tial of 2.5 times RCWV for 5 seconds	
Solderability	95 % coverage Min.	Test temperature of solder : 245 ± 3°C Dwell time in solder : 2 ~ 3 seconds	
Soldering temp. Reference	Electrical characteristics shall be satisfied. Without distinct deformation in appearance. (95 % coverage Min.)	Wave soldering condition: (2 cycles Max.) Pre-heat : 100°C to 120°C, 30 ±5 sec. Suggestion solder temp.: 235°C to 255°C, 10 sec. (Max.) Peak temp.: 260°C Reflow soldering condition: (2 cycles Max.) Pre-heat : 150°C to 180°C, 90°C to 120 sec. Suggestion solder temp.: 235°C to 255°C, 20 to 40 sec. Peak temp.: 260°C (°C) Peak: 260°C (Max) 25°C - 255°C - 20 to 40 sec. Peak temp.: 260°C (°C) Peak: 260°C (Max) 25°C - 255°C - 20 to 40 sec. Peak temp.: 260°C (°C) Pre Heating Zone 150°C - 20-40 sec Soldering Zone Heating time Temperature profile for avaluation Hand soldering condition: The soldering iron tip temperature should be less than 300°C and maximum contract time should be 5 sec.	

www.element14.com www.farnell.com www.newark.com



multicomp


### Surface Mount Resistor Kit 1206 Case Size



Characteristics	Limits Test Methods (JIS C 5201-1)				
Soldering Heat	Resistance change rate is: $\pm(1\% + 0.05\Omega)$ Max.	Dip the resistor into a solder bath having a temperature of $260^{\circ}C \pm 3^{\circ}C$ and hold it for $10 \pm 1$ second			
			Resistance change after continuous 5 cycles for duty cycle specified below :		
		Step	Temperature	Time	
	Resistance change rate is ± (1% +0.05Ω) Max.	1	-55°C ± 3°C	30 mins	
Temperature cycling		2	Room temp.	10 to 15 mins	
		3	+155°C ± 2°C	30 mins	
		4	Room temp.	10 to 15 mins	
Resistance change rate is			change after 1,000 hours (1		
Load life in humidity $\pm (3\% + 0.1\Omega)$ Max.		0.5 hour "off" ) at RCWV in a humidity chamber controlled at 40°C ±2°C and 90 to 95 % relative humidity			
Load Life	Resistance change rate is $\pm (3\% + 0.1\Omega)$ Max.	Permanent resistance change after 1,000 hours operating a RCWV, with duty cycle of (1.5 hours"on", 0.5 hour "off") at 70°C ±2°C ambient			
Terminal bending	Resistance change rate is ± (1% +0.05Ω) Max.	Twist of Test Board : Y/X = 5/90mm for 10 seconds			


#### Kit resistors:

Insert for Chip Kit





#### Album for Chip Kit:

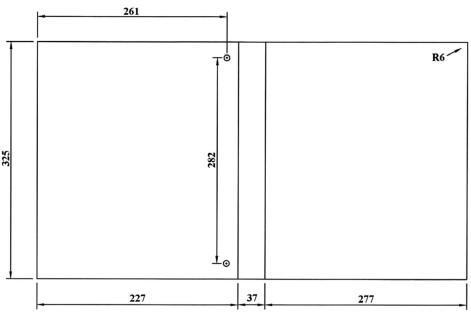

**Dimensions : Millimetres** 

#### **Chip Kit Resistors:**

Product: MC Kit (1206) +/-5%E12 Series = 75 values (0R&10R to 1M)Quantity: 100pcs per valueTotal Qty: 7,500pcs.

NO.	Value
1	0E
2	1R0
3	1R2
4	1R5
5	1R8
6	2R2
7	2R7
8	3R3
9	3R9
10	4R7



NO.	Value
21	39R
22	47R
23	56R
24	68R
25	75R
26	82R
27	100R
28	120R
29	150R
30	180R

NO.	Value
31	220R
32	270R
33	330R
34	390R
35	470R
36	560R
37	680R
38	820R
39	1K
40	1K2



## multicomp

NO.	Value
41	1K5
42	1K8
43	2K2
44	2K7
45	3K3
46	3K9
47	4K7
48	5K6
49	6K8
50	8K2

NO.	Value
51	10K
52	12K
53	15K
54	18K
55	22K
56	27K
57	33K
58	39K
59	47K
60	56K

NO.	Value
61	68K
62	82K
63	100K
64	120K
65	150K
66	180K
67	220K
68	270K
69	330K
70	390K

NO.	Value
71	470K
72	560K
73	680K
74	820K
75	1M

#### Part Number Table

Description	Part Number
Resistor Kit, 1206, E12, 5%	MC1206W8JE012KIT

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheets hould check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

